
Timing Belt Pulleys

Teeth Profile Type	Bore type	Page
MXL	Pilot Bore……	1
XL	Pilot Bore……	2
L	Pilot Bore……	3-5
H	Pilot Bore……	6-14
L	Taper Bore……	15-17
H	Taper Bore……	18-21
XH	Taper Bore……	22-24
T2.5	Pilot Bore……	25
T5	Pilot Bore……	26-28
T10	Pilot Bore……	29-32
AT5	Pilot Bore……	33-35
AT10	Pilot Bore……	36-39
3M	Pilot Bore……	40-42
5M	Pilot Bore……	43-45
5M	Taper Bore……	55
8M	Pilot Bore……	46-49
8M	Taper Bore……	56-59
14M	Pilot Bore……	50-54
14M	Taper Bore……	60-64
GT8M	Pilot & Taper Bore……	65-67
GT14M	Pilot & Taper Bore……	67-69





Timing Pulleys-MXL025 (For Belt - 2.032 Pitch x 6.35 Wide) 0.080"x 1/4"

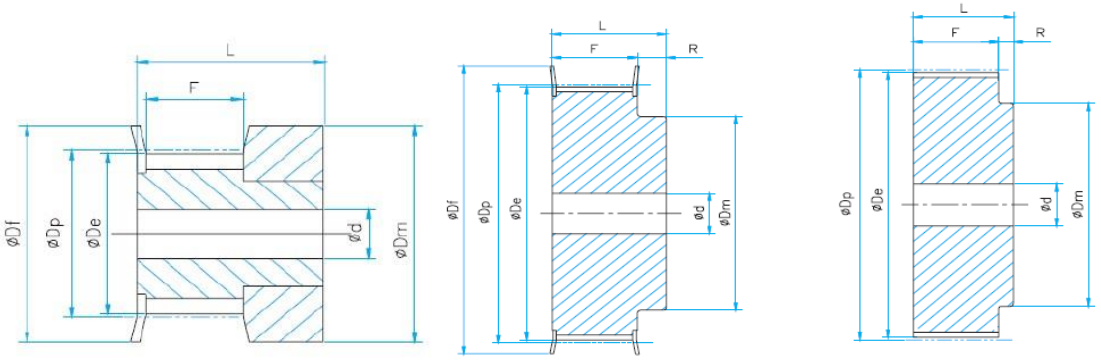


1F 6F 6

Part No.	Teeth No.	Type	Material	Dp	De	Df	Hub Dia. Dm	Width F	Length L	Bore d	Flange Dimension
16MXL025	16	1F	Alu.	10.35	9.84	15	15	8.5	16	solid	15x8x0.5
18MXL025	18	1F	Alu.	11.64	11.12	16	16	8.5	16	solid	16x9.5x0.5
20MXL025	20	1F	Alu.	12.94	12.43	16	16	8.5	16	solid	16x9.5x0.5
22MXL025	22	6F	Alu.	14.23	13.72	17.5	10	11	16	solid	17.5x11.6x0.5
24MXL025	24	6F	Alu.	15.52	15.01	20	10	11	16	solid	20x12.2x0.5
28MXL025	28	6F	Alu.	18.11	17.6	25	11	11	16	solid	25x14.5x0.5
30MXL025	30	6F	Alu.	19.4	18.9	25	12	11	16	solid	25x14.5x0.5
32MXL025	32	6F	Alu.	20.7	20.19	26	14	11	16	solid	26x17.8x0.5
36MXL025	36	6F	Alu.	23.29	22.78	28	16	11	16	solid	28x20x0.5
40MXL025	40	6F	Alu.	25.87	25.37	32	18	11	16	solid	32x23x0.5
42MXL025	42	6F	Alu.	27.17	26.67	32	18	11	16	5	32x23x0.5
44MXL025	44	6F	Alu.	28.46	27.95	36	18	11	16	5	36x25x0.5
48MXL025	48	6	Alu.	31.05	30.54	-	20	11	16	5	-
60MXL025	60	6	Alu.	38.81	38.3	-	24	11	16	5	-
72MXL025	72	6	Alu.	46.57	46.06	-	25	11	16	6	-

Notes:

- Setscrew hole are available upon request
- No surface treatment for aluminum pulley unless request
- Flange dimension O.D.x I.D. x thickness


Timing Pulleys --XL037 (For Belt - 5.08 Pitch x 9.53 Wide) 1/5"x 3/8"

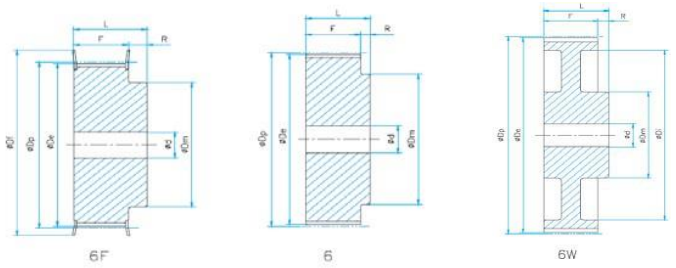

Notes:
Setscrew hole are available upon request
No surface treatment for aluminum pulley unless request
Flange dimension O.D.x I.D. x thickness

Part No.	Teeth No.	type	Material	**Dp**	**De**	**Df**	Hub Dia. **Dm**	**Di**	Width **F**	Length **L**	Bore **d**	Flange Dimension
10XL037	10	6F	Alu./St.	16.17	15.66	23	9.5	-	14.3	20	solid	23x12.5x1.0
11XL037	11	6F	Alu./St.	17.79	17.28	23	9.5	-	14.3	20	solid	23x12.5x1.0
12XL037	12	6F	Alu./St.	19.4	18.9	25	10	-	14.3	20	solid	25x15x1.0
13XL037	13	6F	Alu./St.	21.02	20.51	25	10	-	14.3	20	solid	25x15x1.0
14XL037	14	6F	Alu./St.	22.64	22.13	28	15	-	14.3	20	solid	28x17.8x1.0
15XL037	15	6F	Alu./St.	24.26	23.75	28	15	-	14.3	20	solid	28x17.8x1.0
16XL037	16	6F	Alu./St.	25.87	25.36	32	16	-	14.3	20	solid	32x20x1.0
17XL037	17	6F	Alu./St.	27.49	26.98	32	20	-	14.3	20	solid	32x23x1.0
18XL037	18	6F	Alu./St.	29.11	28.6	35	20	-	14.3	20	solid	35x23x1.0
19XL037	19	6F	Alu./St.	30.72	30.22	35	20	-	14.3	22	solid	35x23x1.0
20XL037	20	6F	Alu./St.	32.34	31.83	38	24	-	14.3	22	solid	38x26.5x1.0
21XL037	21	6F	Alu./St.	33.96	33.45	38	24	-	14.3	22	solid	38x26.5x1.0
22XL037	22	6F	Alu./St.	35.57	35.07	41	25	-	14.3	22	solid	41x30x1.0
24XL037	24	6F	Alu./St.	38.81	38.3	44	30	-	14.3	22	solid	44x32.5x1.0
26XL037	26	6F	Alu./St.	42.04	41.53	48	30	-	14.3	22	8	48x37x1.0
27XL037	25	6F	Alu./St.	43.66	43.15	48	34	-	14.3	22	8	48x37x1.0
28XL037	28	6F	Alu./St.	45.28	44.77	51	34	-	14.3	22	8	51x40x1.0
29XL037	29	6F	Alu./St.	46.89	46.39	51	34	-	14.3	22	8	51x40x1.0
30XL037	30	6F	Alu./St.	48.51	48	54	38	-	14.3	22	8	54x43x1.0
32XL037	32	6F	Alu./St.	51.74	51.24	57	38	-	14.3	25	8	57x47x1.0
34XL037	34	6	Alu./St.	54.98	54.47	-	45	-	14.3	25	8	-
36XL037	36	6	Alu./St.	58.21	57.7	-	45	-	14.3	25	8	-
38XL037	38	6	Alu./St.	61.45	60.94	-	45	-	14.3	25	8	-
40XL037	40	6	Alu./St.	64.68	64.17	-	45	-	14.3	25	8	-
42XL037	42	6	Alu./St.	67.91	67.41	-	45	-	14.3	25	8	-
44XL037	44	6	Alu./St.	71.15	70.64	-	45	-	14.3	25	8	-
46XL037	46	6W	Alu./St.	74.38	73.87	-	45	61	14.3	25	10	-
48XL037	48	6W	Alu./St.	77.62	77.11	-	45	61	14.3	25	10	-
52XL037	52	6W	Alu./St.	84.08	83.58	-	45	67	14.3	25	10	-
56XL037	56	6W	Alu./St.	90.55	90.04	-	45	80	14.3	25	10	-
58XL037	58	6W	Alu./St.	93.79	93.28	-	45	80	14.3	25	10	-
60XL037	60	6W	Alu./St.	97.02	96.51	-	45	80	14.3	25	10	-
68XL037	68	6W	Alu./St.	109.96	109.45	-	45	100	14.3	25	10	-
70XL037	70	6W	Alu./St.	113.19	112.68	-	45	100	14.3	25	10	-
72XL037	72	6W	Alu./St.	116.42	115.92	-	45	100	14.3	25	10	-

L050 (For Belt - 9.525 Pitch x 12.7 Wide) 3/8"x 1/2"

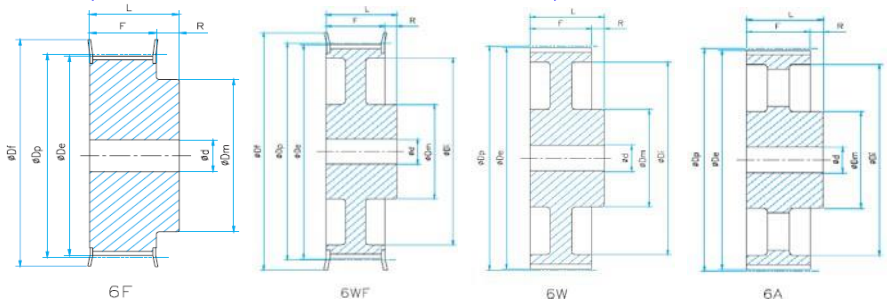


Notes:
Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	**Di**	Width **F**	Length **L**	Bore **d**	Flange Dimension
10L050	10	6F	St.	30.32	29.56	37	20	-	19	28	8	37.0x25.0x1.5
11L050	11	6F	St.	33.35	32.59	37	22	-	19	30	8	37.0x25.0x1.5
12L050	12	6F	St.	36.38	35.62	43	24	-	19	30	8	43.0x31.0x1.5
13L050	13	6F	St.	39.41	38.65	44	28	-	19	30	8	44.0x32.5x1.5
14L050	14	6F	St.	42.45	41.68	48	28	-	19	30	8	48.0x37.0x1.5
15L050	15	6F	St.	45.48	44.72	51	34	-	19	30	8	51.0x38.5x1.5
16L050	16	6F	St.	48.51	47.75	54	36	-	19	32	8	54.0x43.0x1.5
17L050	17	6F	St.	51.54	50.78	57	36	-	19	32	10	57.0x46.0x1.5
18L050	18	6F	St.	54.57	53.81	60	40	-	19	32	10	60.0x48.0x1.5
19L050	19	6F	St.	57.61	56.84	64	40	-	19	32	10	64.0x47.0x1.5
20L050	20	6F	St.	60.64	59.88	66.5	40	-	19	32	10	66.5x53.0x1.5
21L050	21	6F	St.	63.67	62.91	70	45	-	19	32	10	70.0x53.0x1.5
22L050	22	6F	St.	66.7	65.94	75	45	-	19	32	10	75.0x57.0x1.5
23L050	23	6F	St.	69.73	68.97	79	55	-	19	32	10	79.0x60.0x1.5
24L050	24	6F	St.	72.77	72	79	55	-	19	32	10	79.0x60.0x1.5
25L050	25	6F	St.	75.8	75.04	82.5	58	-	19	32	10	82.5x64.0x1.5
26L050	26	6F	St.	78.83	78.07	86	58	-	19	32	11	86.0x68.0x1.5
27L050	27	6F	St.	81.86	81.1	86	58	-	19	32	11	86.0x68.0x1.5
28L050	28	6F	St.	84.89	84.13	91	58	-	19	32	11	91.0x73.0x1.5
30L050	30	6F	St.	90.96	90.2	97	70	-	19	32	11	97.0x79.0x1.5
32L050	32	6F	St.	97.02	96.26	102	70	-	19	32	11	102x82.5x1.5
36L050	36	6F	St.	109.15	108.39	115	70	-	19	32	11	115x94x1.5
40L050	40	6WF	St.	121.28	120.51	128	70	100	19	32	11	128x107x1.5
42L050	42	6WF	St.	127.34	126.58	135	70	106	19	32	11	135x115x1.5
44L050	44	6WF	St.	133.4	132.64	142	70	112	19	32	11	142x120x1.5
48L050	48	6WF	St.	145.53	144.77	150	70	124	19	32	11	150x130x1.5
50L050	50	6W	C.I.	151.6	150.83	-	70	130	19	32	14	-
52L050	52	6W	C.I.	157.66	156.9	-	70	136	19	32	14	-
56L050	56	6W	C.I.	169.79	169.02	-	70	149	19	32	14	-
60L050	60	6W	C.I.	181.91	181.15	-	75	160	19	42	14	-
72L050	72	6A	C.I.	218.3	217.53	-	75	197	19	42	14	-
84L050	84	6A	C.I.	254.68	253.92	-	75	233	19	42	14	-

90L050	90	6A	C.I.	272.87	272.11	-	75	252	19	42	14	-
96L050	96	6A	C.I.	291.06	290.3	-	75	269	19	42	14	-
120L050	120	6A	C.I.	363.83	363.07	-	75	342	19	42	14	-

Timing Pulleys --L075 (For Belt - 9.525 Pitch x 19.5 Wide) 3/8"x 3/4"

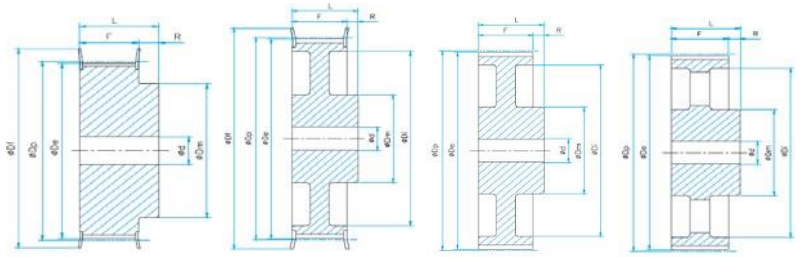


Notes:
Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	**Di**	Width **F**	Length **L**	Bore **d**	Flange Dimension
10L075	10	6F	St.	30.32	29.56	37	20	-	25.4	38	8	37.0x25.0x1.5
11L075	11	6F	St.	33.35	32.59	37	22	-	25.4	38	8	37.0x25.0x1.5
12L075	12	6F	St.	36.38	35.62	43	24	-	25.4	38	8	43.0x31.0x1.5
13L075	13	6F	St.	39.41	38.65	44	28	-	25.4	38	8	44.0x32.5x1.5
14L075	14	6F	St.	42.45	41.68	48	28	-	25.4	38	11	48.0x37.0x1.5
15L075	15	6F	St.	45.48	44.72	51	34	-	25.4	38	11	51.0x38.5x1.5
16L075	16	6F	St.	48.51	47.75	54	36	-	25.4	38	11	54.0x43.0x1.5
17L075	17	6F	St.	51.54	50.78	57	36	-	25.4	38	11	57.0x46.0x1.5
18L075	18	6F	St.	54.57	53.81	60	40	-	25.4	38	11	60.0x48.0x1.5
19L075	19	6F	St.	57.61	56.84	64	40	-	25.4	38	11	64.0x47.0x1.5
20L075	20	6F	St.	60.64	59.88	66.5	40	-	25.4	38	11	66.5x53.0x1.5
21L075	21	6F	St.	63.67	62.91	70	45	-	25.4	38	11	70.0x53.0x1.5
22L075	22	6F	St.	66.7	65.94	75	45	-	25.4	38	11	75.0x57.0x1.5
23L075	23	6F	St.	69.73	68.97	79	55	-	25.4	38	11	79.0x60.0x1.5
24L075	24	6F	St.	72.77	72	79	55	-	25.4	38	11	79.0x60.0x1.5
25L075	25	6F	St.	75.8	75.04	82.5	58	-	25.4	38	11	82.5x64.0x1.5
26L075	26	6F	St.	78.83	78.07	86	58	-	25.4	38	11	86.0x68.0x1.5
27L075	27	6F	St.	81.86	81.1	86	58	-	25.4	38	11	86.0x68.0x1.5
28L075	28	6F	St.	84.89	84.13	91	58	-	25.4	38	11	91.0x73.0x1.5
30L075	30	6F	St.	90.96	90.2	97	70	-	25.4	38	11	97.0x79.0x1.5
32L075	32	6F	St.	97.02	96.26	102	70	-	25.4	38	11	102x82.5x1.5
36L075	36	6F	St.	109.15	108.39	115	70	-	25.4	38	11	115x94x1.5
40L075	40	6WF	St.	121.28	120.51	128	70	100	25.4	38	11	128x107x1.5
42L075	42	6WF	St.	127.34	126.58	135	70	106	25.4	38	11	135x115x1.5
44L075	44	6WF	St.	133.4	132.64	142	70	112	25.4	38	11	142x120x1.5
48L075	48	6WF	St.	145.53	144.77	150	70	124	25.4	38	11	150x130x1.5
50L075	50	6W	C.I.	151.6	150.83	-	70	130	25.4	38	14	-
52L075	52	6W	C.I.	157.66	156.9	-	70	136	25.4	38	14	-
56L075	56	6W	C.I.	169.79	169.02	-	70	149	25.4	38	14	-
60L075	60	6W	C.I.	181.91	181.15	-	75	160	25.4	45	14	-

72L075	72	6A	C.I.	218.3	217.53	-	75	197	25.4	45	14	-
84L075	84	6A	C.I.	254.68	253.92	-	75	233	25.4	45	14	-
90L075	90	6A	C.I.	272.87	272.11	-	75	252	25.4	45	14	-
96L075	96	6A	C.I.	291.06	290.3	-	75	269	25.4	45	14	-
120L075	120	6A	C.I.	363.83	363.07	-	75	342	25.4	45	14	-

Timing Pulleys --L100 (For Belt - 9.525 Pitch x 25.4 Wide) 3/8"x 1"

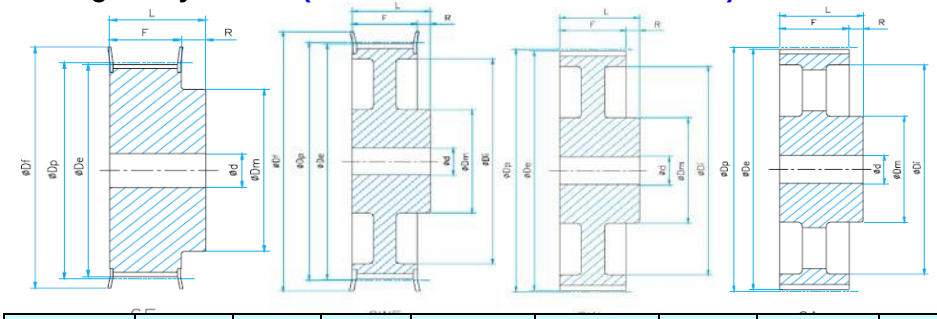


Notes:
Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	**Di**	Width **F**	Length **L**	Bore **d**	Flange Dimension
10L100	10	6F	St.	30.32	29.56	37	20	-	31.8	45	8	37.0x25.0x1.5
11L100	11	6F	St.	33.35	32.59	37	22	-	31.8	45	8	37.0x25.0x1.5
12L100	12	6F	St.	36.38	35.62	43	24	-	31.8	45	8	43.0x31.0x1.5
13L100	13	6F	St.	39.41	38.65	44	28	-	31.8	45	8	44.0x32.5x1.5
14L100	14	6F	St.	42.45	41.68	48	28	-	31.8	45	11	48.0x37.0x1.5
15L100	15	6F	St.	45.48	44.72	51	34	-	31.8	45	11	51.0x38.5x1.5
16L100	16	6F	St.	48.51	47.75	54	36	-	31.8	45	11	54.0x43.0x1.5
17L100	17	6F	St.	51.54	50.78	57	36	-	31.8	45	11	57.0x46.0x1.5
18L100	18	6F	St.	54.57	53.81	60	40	-	31.8	45	11	60.0x48.0x1.5
19L100	19	6F	St.	57.61	56.84	64	40	-	31.8	45	11	64.0x47.0x1.5
20L100	20	6F	St.	60.64	59.88	66.5	40	-	31.8	45	11	66.5x53.0x1.5
21L100	21	6F	St.	63.67	62.91	70	45	-	31.8	45	11	70.0x53.0x1.5
22L100	22	6F	St.	66.7	65.94	75	45	-	31.8	45	11	75.0x57.0x1.5
23L100	23	6F	St.	69.73	68.97	79	55	-	31.8	45	11	79.0x60.0x1.5
24L100	24	6F	St.	72.77	72	79	55	-	31.8	45	11	79.0x60.0x1.5
25L100	25	6F	St.	75.8	75.04	82.5	58	-	31.8	45	11	82.5x64.0x1.5
26L100	26	6F	St.	78.83	78.07	86	58	-	31.8	45	11	86.0x68.0x1.5
27L100	27	6F	St.	81.86	81.1	86	58	-	31.8	45	11	86.0x68.0x1.5
28L100	28	6F	St.	84.89	84.13	91	58	-	31.8	45	11	91.0x73.0x1.5
30L100	30	6F	St.	90.96	90.2	97	70	-	31.8	45	11	97.0x79.0x1.5
32L100	32	6F	St.	97.02	96.26	102	70	-	31.8	45	11	102x82.5x1.5
36L100	36	6F	St.	109.15	108.39	115	70	-	31.8	45	11	115x94x1.5
40L100	40	6WF	St.	121.28	120.51	128	70	100	31.8	45	11	128x107x1.5
42L100	42	6WF	St.	127.34	126.58	135	70	106	31.8	45	11	135x115x1.5
44L100	44	6WF	St.	133.4	132.64	142	70	112	31.8	45	11	142x120x1.5
48L100	48	6WF	St.	145.53	144.77	150	70	124	31.8	45	11	150x130x1.5
50L100	50	6W	C.I.	151.6	150.83	-	70	130	31.8	45	14	-
52L100	52	6W	C.I.	157.66	156.9	-	70	136	31.8	45	14	-
56L100	56	6W	C.I.	169.79	169.02	-	70	149	31.8	45	14	-

60L100	60	6W	C.I.	181.91	181.15	-	75	160	31.8	50	14	-
72L100	72	6A	C.I.	218.3	217.53	-	75	197	31.8	50	14	-
84L100	84	6A	C.I.	254.68	253.92	-	75	233	31.8	50	14	-
90L100	90	6A	C.I.	272.87	272.11	-	75	252	31.8	50	14	-
96L100	96	6A	C.I.	291.06	290.3	-	75	269	31.8	50	14	-
120L100	120	6A	C.I.	363.83	363.07	-	75	342	31.8	50	14	-

Timing Pulleys -- H075 (For Belt - 12.7 Pitch x 19.05 Wide) 1/2"x 3/4"

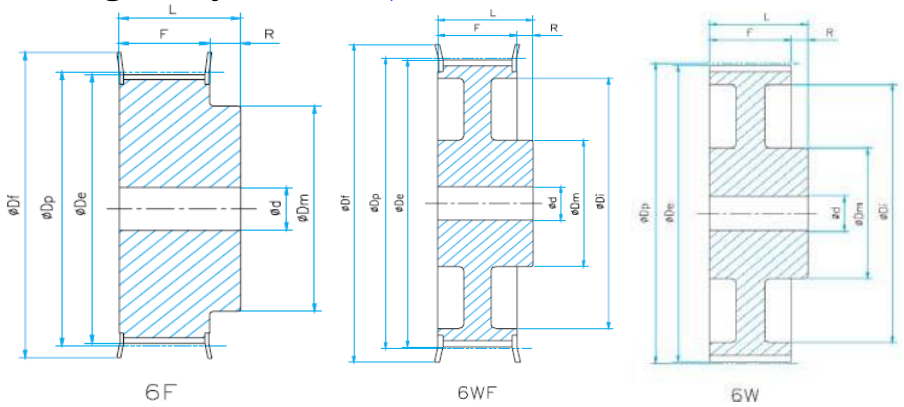

6F 6WF 6W


Notes:
Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	**Di**	Width **F**	Length **L**	Bore **d**	Flange Dimension
14 H 075	14	6F	St.	56.6	55.22	64	40	-	26.4	40	8	64.0x47.0x1.5
15 H 075	15	6F	St.	60.64	59.27	66.5	45	-	26.4	40	8	66.5x53.0x1.5
16 H 075	16	6F	St.	64.68	63.31	70	45	-	26.4	40	8	70.0x53.0x1.5
17 H 075	17	6F	St.	68.72	67.35	75	45	-	26.4	40	8	75.0x57.0x1.5
18 H 075	18	6F	St.	68.72	71.39	79	55	-	26.4	40	11	79.0x60.0x1.5
19 H 075	19	6F	St.	68.72	75.44	82.5	60	-	26.4	40	11	82.5x64.0x1.5
20 H 075	20	6F	St.	68.72	79.48	87	62	-	26.4	40	11	87.0x72.0x1.5
21 H 075	21	6F	St.	68.72	83.52	91	65	-	26.4	40	11	91.0x73.0x1.5
22 H 075	22	6F	St.	68.72	87.56	94	68	-	26.4	40	11	94.0x76.0x1.5
23 H 075	23	6F	St.	68.72	91.61	97	72	-	26.4	40	11	97.0x79.0x1.5
24 H 075	24	6F	St.	68.72	95.65	102	72	-	26.4	40	11	102.0x82.5x1.5
25 H 075	25	6F	St.	68.72	99.69	106	72	-	26.4	40	11	106.0x86.0x1.5
26 H 075	26	6F	St.	68.72	103.73	112	80	-	26.4	40	11	112.0x91.0x1.5
27 H 075	27	6F	St.	68.72	107.78	115	80	-	26.4	40	11	115.0x94.0x1.5
28 H 075	28	6F	St.	68.72	111.82	120	80	-	26.4	40	11	120.0x99.5x1.5
29 H 075	29	6F	St.	68.72	115.86	120	80	-	26.4	40	11	128.0x107.0x1.5
30 H 075	30	6F	St.	68.72	119.9	128	80	-	26.4	40	11	128.0x107.0x1.5
32 H 075	32	6F	St.	68.72	127.99	135	80	-	26.4	40	11	135.0x115.0x1.5
33 H 075	33	6F	St.	68.72	132.03	142	80	-	26.4	40	11	142.0x120.0x1.5
34 H 075	34	6F	St.	68.72	136.07	142	80	-	26.4	40	11	142.0x120.0x1.5
35 H 075	35	6F	St.	68.72	140.12	150	80	-	26.4	40	11	150.0x130.0x1.5
36 H 075	36	6F	St.	68.72	144.16	150	80	-	26.4	40	11	150.0x130.0x1.5
38 H 075	38	6F	St.	68.72	152.24	158	80	-	26.4	40	11	158.0x138.5x1.5
40 H 075	40	6F	St.	68.72	160.33	168	80	-	26.4	40	11	168.0x148.0x1.5

42 H 075	42	6F	St.	68.72	168.41	180	80	-	26.4	40	11	180.0x154.0x1.5
44 H 075	44	6WF	C.I.	68.72	176.5	184	80	150	26.4	40	14	184.0x162.0x1.5
45 H 075	45	6WF	C.I.	68.72	180.54	192	80	154	26.4	40	14	192.0x165.0x1.5
48 H 075	48	6WF	C.I.	68.72	192.67	200	90	166	26.4	40	14	200.0x180.0x1.5
49 H 075	49	6W	C.I.	68.72	196.71	-	90	170	26.4	40	14	-
50 H 075	50	6W	C.I.	68.72	200.75	-	90	174	26.4	40	14	-

Timing Pulleys -- H100 (For Belt - 12.7 Pitch x 25.4 Wide) 1/2"x 1"

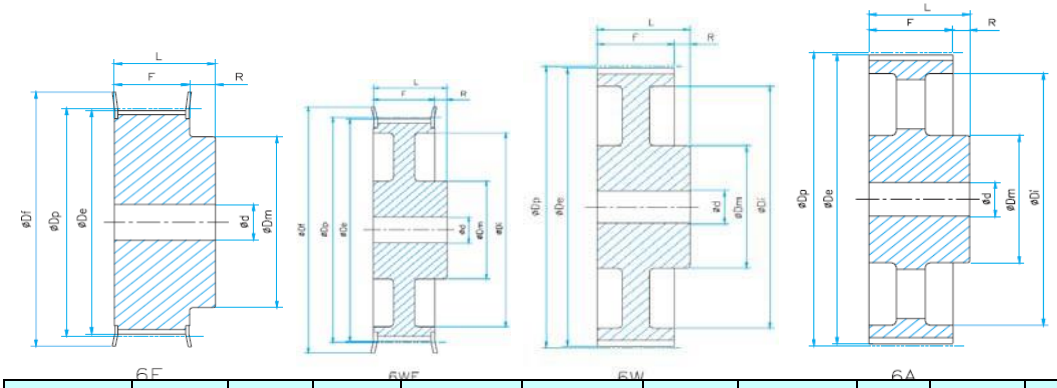

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	**Di**	Width **F**	Length **L**	Bore **d**	Flange Dimension
14 H 100	14	6F	St.	56.6	55.22	64	40	-	31.8	45	11	64.0x47.0x1.5
15 H 100	15	6F	St.	60.64	59.27	66.5	45	-	31.8	45	11	66.5x53.0x1.5
16 H 100	16	6F	St.	64.68	63.31	70	45	-	31.8	45	11	70.0x53.0x1.5
17 H 100	17	6F	St.	68.72	67.35	75	45	-	31.8	45	11	75.0x57.0x1.5
18 H 100	18	6F	St.	72.77	71.39	79	55	-	31.8	45	14	79.0x60.0x1.5
19 H 100	19	6F	St.	76.81	75.44	82.5	60	-	31.8	45	14	82.5x64.0x1.5
20 H 100	20	6F	St.	80.85	79.48	87	62	-	31.8	45	14	87.0x72.0x1.5
21 H 100	21	6F	St.	84.89	83.52	91	65	-	31.8	45	14	91.0x73.0x1.5
22 H 100	22	6F	St.	88.94	87.56	94	68	-	31.8	45	14	94.0x76.0x1.5
23 H 100	23	6F	St.	92.98	91.61	97	72	-	31.8	45	14	97.0x79.0x1.5
24 H 100	24	6F	St.	97.02	95.65	102	72	-	31.8	45	14	102.0x82.5x1.5
25 H 100	25	6F	St.	101.06	99.69	106	72	-	31.8	45	14	106.0x86.0x1.5
26 H 100	26	6F	St.	105.11	103.73	112	80	-	31.8	45	14	112.0x91.0x1.5
27 H 100	27	6F	St.	109.15	107.78	115	80	-	31.8	45	14	115.0x94.0x1.5
28 H 100	28	6F	St.	113.19	111.82	120	80	-	31.8	45	14	120.0x99.5x1.5
29 H 100	29	6F	St.	117.23	115.86	120	80	-	31.8	45	14	128.0x107.0x1.5
30 H 100	30	6F	St.	121.28	119.9	128	80	-	31.8	45	14	128.0x107.0x1.5
32 H 100	32	6F	St.	129.36	127.99	135	80	-	31.8	45	14	135.0x115.0x1.5
33 H 100	33	6F	St.	133.4	132.03	142	80	-	31.8	45	14	142.0x120.0x1.5
34 H 100	34	6F	St.	137.45	136.07	142	80	-	31.8	45	14	142.0x120.0x1.5
35 H 100	35	6F	St.	141.49	140.12	150	80	-	31.8	45	14	150.0x130.0x1.5
36 H 100	36	6WF	St.	145.53	144.16	150	80	-	31.8	45	14	150.0x130.0x1.5
38 H 100	38	6WF	St.	153.62	152.24	158	80	-	31.8	45	14	158.0x138.5x1.5
40 H 100	40	6WF	St.	161.7	160.33	168	80	-	31.8	45	14	168.0x148.0x1.5


42 H 100	42	6WF	St.	169.79	168.41	180	80	-	31.8	45	14	180.0x154.0x1.5
44 H 100	44	6WF	C.I.	177.87	176.5	184	80	150	31.8	50	14	184.0x162.0x1.5
45 H 100	45	6WF	C.I.	181.91	180.54	192	80	154	31.8	50	14	192.0x165.0x1.5
48 H 100	48	6WF	C.I.	194.04	192.67	200	90	166	31.8	50	14	200.0x180.0x1.5
49 H 100	49	6W	C.I.	198.08	196.71	-	90	170	31.8	50	19	-
50 H 100	50	6W	C.I.	202.13	200.75	-	90	174	31.8	50	19	-
52 H 100	52	6W	C.I.	210.21	208.84	-	90	182	31.8	50	19	-
58 H 100	58	6A	C.I.	234.47	233.09	-	90	207	31.8	50	19	-
60 H 100	60	6A	C.I.	242.55	241.18	-	90	215	31.8	50	19	-
70 H 100	70	6A	C.I.	282.98	281.61	-	100	255	31.8	55	19	-
72 H 100	72	6A	C.I.	291.06	289.69	-	100	263	31.8	55	19	-
82 H 100	82	6A	C.I.	331.49	330.12	-	100	304	31.8	55	19	-
84 H 100	84	6A	C.I.	339.57	338.2	-	100	312	31.8	55	19	-
94 H 100	94	6A	C.I.	380	378.63	-	120	352	31.8	60	19	-
96 H 100	96	6A	C.I.	388.08	386.71	-	120	360	31.8	60	19	-
106 H 100	106	6A	C.I.	428.51	427.14	-	120	401	31.8	60	19	-
116 H 100	116	6A	C.I.	468.93	467.56	-	120	441	31.8	60	19	-
118 H 100	118	6A	C.I.	477.02	475.65	-	120	449	31.8	60	19	-
120 H 100	120	6A	C.I.	485.1	483.73	-	120	458	31.8	60	19	-
150 H 100	150	6A	C.I.	606.38	605.01	-	120	579	31.8	60	19	-
152 H 100	152	6A	C.I.	614.47	613.09	-	120	587	31.8	60	19	-
154 H 100	154	6A	C.I.	622.55	621.18	-	120	595	31.8	60	19	-
156 H 100	156	6A	C.I.	630.64	629.26	-	120	603	31.8	60	19	-

Notes:

Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Timing Pulleys -- H150 (For Belt - 12.7 Pitch x 38.1 Wide) 1/2"x 1-1/2"

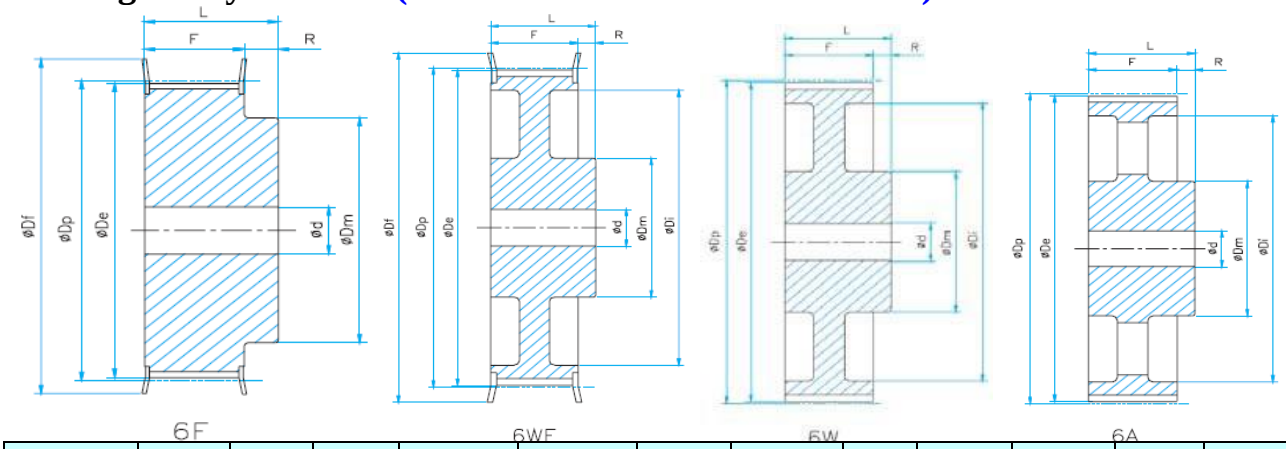

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	**Di**	Width **F**	Length **L**	Bore **d**	Flange Dimension
14 H 150	14	6F	St.	56.6	55.22	64	40	-	46	58	11	64.0x47.0x1.5
15 H 150	15	6F	St.	60.64	59.27	66.5	45	-	46	58	11	66.5x53.0x1.5
16 H 150	16	6F	St.	64.68	63.31	70	45	-	46	58	11	70.0x53.0x1.5
17 H 150	17	6F	St.	68.72	67.35	75	45	-	46	58	11	75.0x57.0x1.5
18 H 150	18	6F	St.	72.77	71.39	79	55	-	46	58	14	79.0x60.0x1.5
19 H 150	19	6F	St.	76.81	75.44	82.5	60	-	46	58	14	82.5x64.0x1.5
20 H 150	20	6F	St.	80.85	79.48	87	62	-	46	58	14	86.0x68.0x1.5
21 H 150	21	6F	St.	84.89	83.52	91	65	-	46	58	14	91.0x73.0x1.5
22 H 150	22	6F	St.	88.94	87.56	94	68	-	46	58	14	94.0x76.0x1.5
23 H 150	23	6F	St.	92.98	91.61	97	72	-	46	58	14	97.0x79.0x1.5
24 H 150	24	6F	St.	97.02	95.65	102	72	-	46	58	14	102.0x82.5x1.5
25 H 150	25	6F	St.	101.06	99.69	106	72	-	46	58	14	106.0x86.0x1.5
26 H 150	26	6F	St.	105.11	103.73	112	80	-	46	58	14	112.0x91.0x1.5
27 H 150	27	6F	St.	109.15	107.78	115	80	-	46	58	14	115.0x94.0x1.5
28 H 150	28	6F	St.	113.19	111.82	120	80	-	46	58	14	120.0x99.5x1.5
29 H 150	29	6F	St.	117.23	115.86	120	80	-	46	58	14	128.0x107.0x1.5
30 H 150	30	6F	St.	121.28	119.9	128	80	-	46	58	14	128.0x107.0x1.5
32 H 150	32	6F	St.	129.36	127.99	135	80	-	46	58	14	135.0x115.0x1.5
33 H 150	33	6F	St.	133.4	132.03	142	80	-	46	58	14	142.0x120.0x1.5
34 H 150	34	6F	St.	137.45	136.07	142	80	-	46	58	14	142.0x120.0x1.5
35 H 150	35	6F	St.	141.49	140.12	150	80	-	46	58	14	150.0x130.0x1.5
36 H 150	36	6WF	St.	145.53	144.16	150	80	118	46	58	14	150.0x130.0x1.5
38 H 150	38	6WF	St.	153.62	152.24	158	80	126	46	58	14	158.0x138.5x1.5
40 H 150	40	6WF	St.	161.7	160.33	168	80	134	46	58	14	168.0x148.0x1.5
42 H 150	42	6WF	St.	169.79	168.41	180	80	140	46	58	19	180.0x154.0x1.5
44 H 150	44	6WF	C.I.	177.87	176.5	184	80	150	46	58	19	184.0x162.0x1.5
45 H 150	45	6WF	C.I.	181.91	180.54	192	80	154	46	58	19	192.0x165.0x1.5
48 H 150	48	6WF	C.I.	194.04	192.67	200	90	166	46	65	19	200.0x180.0x1.5
49 H 150	49	6W	C.I.	198.08	196.71	-	90	170	46	65	19	-
50 H 150	50	6W	C.I.	202.13	200.75	-	90	174	46	65	19	-


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	**Di**	Width **F**	Length **L**	Bore **d**	Flange Dimension
52 H 150	52	6W	C.I.	210.21	208.84	-	90	182	46	65	19	-
58 H 150	58	6A	C.I.	234.47	233.09	-	90	207	46	65	19	-
60 H 150	60	6A	C.I.	242.55	241.18	-	90	215	46	65	19	-
70 H 150	70	6A	C.I.	282.98	281.61	-	100	255	46	65	24	-
72 H 150	72	6A	C.I.	291.06	289.69	-	100	263	46	65	24	-
82 H 150	82	6A	C.I.	331.49	330.12	-	100	304	46	65	24	-
84 H 150	84	6A	C.I.	339.57	338.2	-	100	312	46	65	24	-
94 H 150	94	6A	C.I.	380	378.63	-	120	352	46	65	24	-
96 H 150	96	6A	C.I.	388.08	386.71	-	120	360	46	65	24	-
106 H 150	106	6A	C.I.	428.51	427.14	-	120	401	46	65	24	-
116 H 150	116	6A	C.I.	468.93	467.56	-	120	441	46	65	24	-
118 H 150	118	6A	C.I.	477.02	475.65	-	120	449	46	65	24	-
120 H 150	120	6A	C.I.	485.1	483.73	-	120	458	46	65	24	-
150 H 150	150	6A	C.I.	606.38	605.01	-	120	579	46	65	24	-
152 H 150	152	6A	C.I.	614.47	613.09	-	120	587	46	65	24	-
154 H 150	154	6A	C.I.	622.55	621.18	-	120	595	46	65	24	-
156 H 150	156	6A	C.I.	630.64	629.26	-	120	603	46	65	24	-

Notes:

Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Timing Pulleys -- H200 (For Belt - 12.7 Pitch x 50.8 Wide) 1/2"x 2"

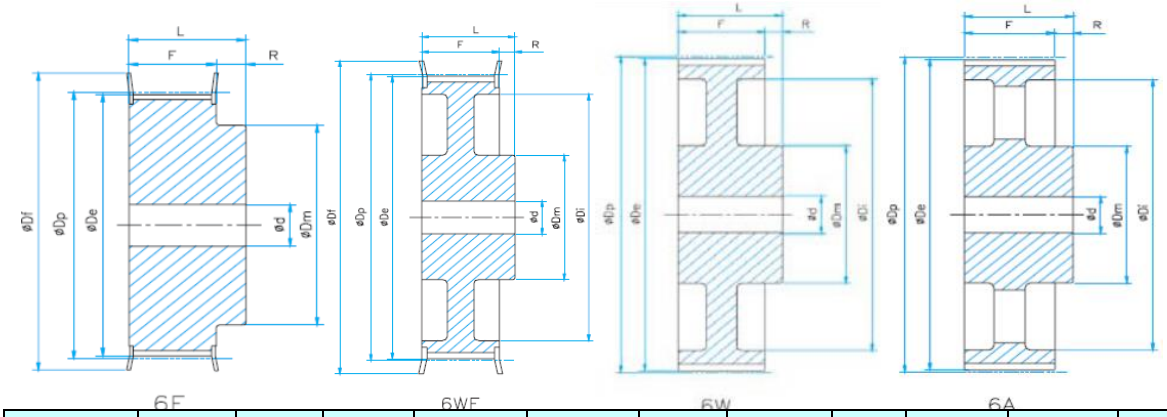

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	**Di**	Width **F**	Length **L**	Bore **d**	Flange Dimension
14 H 200	14	6F	St.	56.6	55.22	64	40	-	58.7	70	11	64.0x47.0x1.5
15 H 200	15	6F	St.	60.64	59.27	66.5	45	-	58.7	70	11	66.5x53.0x1.5
16 H 200	16	6F	St.	64.68	63.31	70	45	-	58.7	70	11	70.0x53.0x1.5
17 H 200	17	6F	St.	68.72	67.35	75	45	-	58.7	70	11	75.0x57.0x1.5
18 H 200	18	6F	St.	72.77	71.39	79	55	-	58.7	70	14	79.0x60.0x1.5
19 H 200	19	6F	St.	76.81	75.44	82.5	60	-	58.7	70	14	82.5x64.0x1.5
20 H 200	20	6F	St.	80.85	79.48	87	62	-	58.7	70	14	87.0x72.0x1.5
21 H 200	21	6F	St.	84.89	83.52	91	65	-	58.7	70	14	91.0x73.0x1.5
22 H 200	22	6F	St.	88.94	87.56	94	68	-	58.7	70	14	94.0x76.0x1.5
23 H 200	23	6F	St.	92.98	91.61	97	72	-	58.7	70	14	97.0x79.0x1.5
24 H 200	24	6F	St.	97.02	95.65	102	72	-	58.7	70	14	102.0x82.5x1.5
25 H 200	25	6F	St.	101.06	99.69	106	72	-	58.7	70	14	106.0x86.0x1.5
26 H 200	26	6F	St.	105.11	103.73	112	80	-	58.7	70	14	112.0x91.0x1.5
27 H 200	27	6F	St.	109.15	107.78	115	80	-	58.7	70	14	115.0x94.0x1.5
28 H 200	28	6F	St.	113.19	111.82	120	80	-	58.7	70	14	120.0x99.5x1.5
29 H 200	29	6F	St.	117.23	115.86	120	80	-	58.7	70	14	128.0x107.0x1.5
30 H 200	30	6F	St.	121.28	119.9	128	80	-	58.7	70	14	128.0x107.0x1.5
32 H 200	32	6F	St.	129.36	127.99	135	80	-	58.7	70	14	135.0x115.0x1.5
33 H 200	33	6F	St.	133.4	132.03	142	80	-	58.7	70	14	142.0x120.0x1.5
34 H 200	34	6F	St.	137.45	136.07	142	80	-	58.7	70	14	142.0x120.0x1.5
35 H 200	35	6F	St.	141.49	140.12	150	80	-	58.7	70	14	150.0x130.0x1.5
36 H 200	36	6WF	St.	145.53	144.16	150	80	118	58.7	70	14	150.0x130.0x1.5
38 H 200	38	6WF	St.	153.62	152.24	158	80	126	58.7	70	14	158.0x138.5x1.5
40 H 200	40	6WF	St.	161.7	160.33	168	80	134	58.7	70	14	168.0x148.0x1.5
42 H 200	42	6WF	St.	169.79	168.41	180	80	140	58.7	70	19	180.0x154.0x1.5
44 H 200	44	6WF	C.I.	177.87	176.5	184	80	150	58.7	70	19	184.0x162.0x1.5
45 H 200	45	6WF	C.I.	181.91	180.54	192	80	154	58.7	70	19	192.0x165.0x1.5
48 H 200	48	6WF	C.I.	194.04	192.67	200	90	166	58.7	75	24	200.0x180.0x1.5
49 H 200	49	6W	C.I.	198.08	196.71	-	90	170	58.7	75	24	-
50 H 200	50	6W	C.I.	202.13	200.75	-	90	174	58.7	75	24	-


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	**Di**	Width **F**	Length **L**	Bore **d**	Flange Dimension
52 H 200	52	6W	C.I.	210.21	208.84	-	90	182	58.7	75	24	-
58 H 200	58	6A	C.I.	234.47	233.09	-	90	207	58.7	75	24	-
60 H 200	60	6A	C.I.	242.55	241.18	-	90	215	58.7	75	24	-
70 H 200	70	6A	C.I.	282.98	281.61	-	100	255	58.7	75	28	-
72 H 200	72	6A	C.I.	291.06	289.69	-	100	263	58.7	75	28	-
82 H 200	82	6A	C.I.	331.49	330.12	-	100	304	58.7	75	28	-
84 H 200	84	6A	C.I.	339.57	338.2	-	100	312	58.7	75	28	-
94 H 200	94	6A	C.I.	380	378.63	-	120	352	58.7	75	28	-
96 H 200	96	6A	C.I.	388.08	386.71	-	120	360	58.7	75	28	-
106 H 200	106	6A	C.I.	428.51	427.14	-	120	401	58.7	75	28	-
116 H 200	116	6A	C.I.	468.93	467.56	-	120	441	58.7	75	28	-
118 H 200	118	6A	C.I.	477.02	475.65	-	120	449	58.7	75	28	-
120 H 200	120	6A	C.I.	485.1	483.73	-	120	458	58.7	75	28	-
150 H 200	150	6A	C.I.	606.38	605.01	-	120	579	58.7	75	28	-
152 H 200	152	6A	C.I.	614.47	613.09	-	120	587	58.7	75	28	-
154 H 200	154	6A	C.I.	622.55	621.18	-	120	595	58.7	75	28	-
156 H 200	156	6A	C.I.	630.64	629.26	-	120	603	58.7	75	28	-

Notes:

Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Timing Pulleys -- H300 (For Belt - 12.7 Pitch x 76.3 Wide) 1/2"x 3"

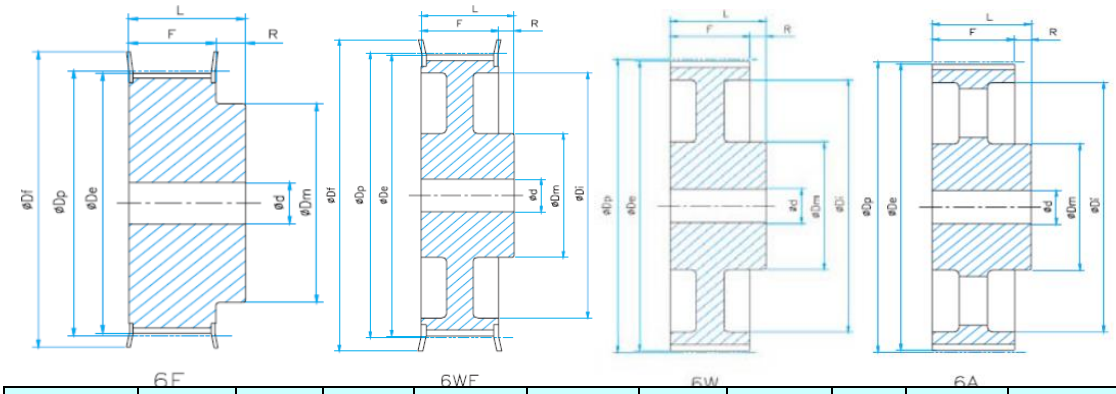

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	**Di**	Width **F**	Length **L**	Bore **d**	Flange Dimension
14 H 300	14	6F	St.	56.6	55.22	64	40	-	85.7	100	11	64.0x47.0x1.5
15 H 300	15	6F	St.	60.64	59.27	66	45	-	85.7	100	11	66.5x53.0x1.5
16 H 300	16	6F	St.	64.68	63.31	70	45	-	85.7	100	11	70.0x53.0x1.5
17 H 300	17	6F	St.	68.72	67.35	75	45	-	85.7	100	11	75.0x57.0x1.5
18 H 300	18	6F	St.	72.77	71.39	79	55	-	85.7	100	19	79.0x60.0x1.5
19 H 300	19	6F	St.	76.81	75.44	83	60	-	85.7	100	19	82.5x64.0x1.5
20 H 300	20	6F	St.	80.85	79.48	87	62	-	85.7	100	19	86.0x68.0x1.5
21 H 300	21	6F	St.	84.89	83.52	91	65	-	85.7	100	19	91.0x73.0x1.5
22 H 300	22	6F	St.	88.94	87.56	94	68	-	85.7	100	19	94.0x76.0x1.5
23 H 300	23	6F	St.	92.98	91.61	97	72	-	85.7	100	19	97.0x79.0x1.5
24 H 300	24	6F	St.	97.02	95.65	102	72	-	85.7	100	19	102.0x82.5x1.5
25 H 300	25	6F	St.	101.06	99.69	106	72	-	85.7	100	19	106.0x86.0x1.5
26 H 300	26	6F	St.	105.11	103.73	112	80	-	85.7	100	19	112.0x91.0x1.5
27 H 300	27	6F	St.	109.15	107.78	115	80	-	85.7	100	19	115.0x94.0x1.5
28 H 300	28	6F	St.	113.19	111.82	120	80	-	85.7	100	19	120.0x99.5x1.5
29 H 300	29	6F	St.	117.23	115.86	123	80	-	85.7	100	19	128.0x107.0x1.5
30 H 300	30	6F	St.	121.28	119.9	128	80	-	85.7	100	19	128.0x107.0x1.5
32 H 300	32	6F	St.	129.36	127.99	135	80	-	85.7	100	19	135.0x115.0x1.5
33 H 300	33	6F	St.	133.4	132.03	142	80	-	85.7	100	19	142.0x120.0x1.5
34 H 300	34	6F	St.	137.45	136.07	142	80	-	85.7	100	19	142.0x120.0x1.5
35 H 300	35	6F	St.	141.49	140.12	150	80	-	85.7	100	19	150.0x130.0x1.5
36 H 300	36	6WF	St.	145.53	144.16	150	80	118	85.7	100	19	150.0x130.0x1.5
38 H 300	38	6WF	St.	153.62	152.24	158	80	126	85.7	100	19	158.0x138.5x1.5
40 H 300	40	6WF	St.	161.7	160.33	168	80	134	85.7	100	19	168.0x148.0x1.5
42 H 300	42	6WF	St.	169.79	168.41	175	80	140	85.7	100	24	180.0x154.0x1.5
44 H 300	44	6WF	C.I.	177.87	176.5	184	80	150	85.7	100	24	184.0x162.0x1.5
45 H 300	45	6WF	C.I.	181.91	180.54	192	80	154	85.7	100	24	192.0x165.0x1.5
48 H 300	48	6WF	C.I.	194.04	192.67	200	90	166	85.7	100	24	200.0x180.0x1.5
49 H 300	49	6W	C.I.	198.08	196.71	-	90	170	85.7	100	24	-
50 H 300	50	6W	C.I.	202.13	200.75	-	90	174	85.7	100	24	-


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	**Di**	Width **F**	Length **L**	Bore **d**	Flange Dimension
52 H 300	52	6W	C.I.	210.21	208.84	-	90	182	85.7	100	24	-
58 H 300	58	6A	C.I.	234.47	233.09	-	90	207	85.7	100	24	-
60 H 300	60	6A	C.I.	242.55	241.18	-	90	215	85.7	100	24	-
70 H 300	70	6A	C.I.	282.98	281.61	-	100	255	85.7	100	28	-
72 H 300	72	6A	C.I.	291.06	289.69	-	100	263	85.7	100	28	-
82 H 300	82	6A	C.I.	331.49	330.12	-	100	304	85.7	100	28	-
84 H 300	84	6A	C.I.	339.57	338.2	-	100	312	85.7	100	28	-
94 H 300	94	6A	C.I.	380	378.63	-	120	352	85.7	100	28	-
96 H 300	96	6A	C.I.	388.08	386.71	-	120	360	85.7	100	28	-
106 H 300	106	6A	C.I.	428.51	427.14	-	120	401	85.7	100	28	-
116 H 300	116	6A	C.I.	468.93	467.56	-	120	441	85.7	100	28	-
118 H 300	118	6A	C.I.	477.02	475.65	-	120	449	85.7	100	28	-
120 H 300	120	6A	C.I.	485.1	483.73	-	120	458	85.7	100	28	-
150 H 300	150	6A	C.I.	606.38	605.01	-	120	579	85.7	100	28	-
152 H 300	152	6A	C.I.	614.47	613.09	-	120	587	85.7	100	28	-
154 H 300	154	6A	C.I.	622.55	621.18	-	120	595	85.7	100	28	-
156 H 300	156	6A	C.I.	630.64	629.26	-	120	603	85.7	100	28	-

Notes:

Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Taper Lock Timing Pulleys -- L050 (For Belt - 9.525 Pitch x 12.7 Wide) 3/8"x1/2"

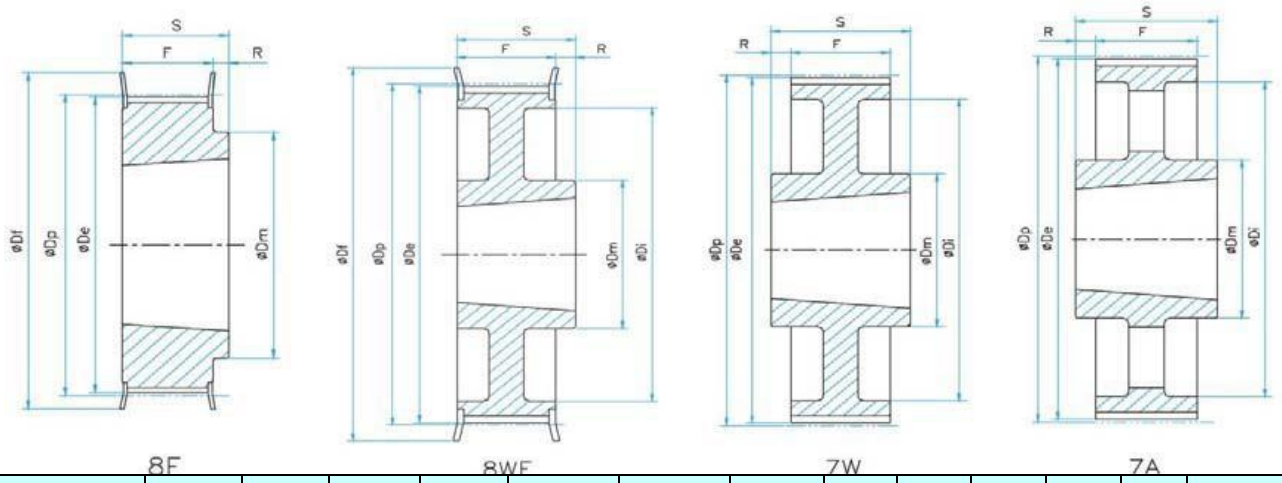


8F 8WF 7W 7A

Part No.	Teeth No.	Type	Mat'l	Bush No.	**Dp**	**De**	**Df**	**Dm**	**Di**	**F**	**S**	**R**	Flange Dimension
TL18L050	18	8F	St.	1108	54.57	53.81	60	45	-	19	22	3	60.0x48.0x1.5
TL19L050	19	8F	St.	1108	57.61	56.84	64	45	-	19	22	3	64.0x47.0x1.5
TL20L050	20	8F	St.	1108	60.64	59.88	66.5	48	-	19	22	3	66.5x53.0x1.5
TL21L050	21	8F	St.	1108	63.67	62.91	70	48	-	19	22	3	70.0x53.0x1.5
TL22L050	22	8F	St.	1108	66.7	65.94	75	51	-	19	22	3	75.0x57.0x1.5
TL23L050	23	8F	St.	1108	69.73	68.97	79	54	-	19	22	3	79.0x60.0x1.5
TL24L050	24	8F	St.	1108	72.77	72	79	54	-	19	22	3	79.0x60.0x1.5
TL25L050	25	8F	St.	1108	75.8	75.04	82.5	56	-	19	22	3	82.5x64.0x1.5
TL26L050	26	8F	St.	1108	78.83	78.07	86	60	-	19	22	3	86.0x68.0x1.5
TL27L050	27	8F	St.	1108	81.86	81.1	86	62	-	19	22	3	86.0x68.0x1.5
TL28L050	28	8F	St.	1108	84.89	84.13	91	65	-	19	22	3	91.0x73.0x1.5
TL30L050	30	8F	St.	1108	90.96	90.2	97	70	-	19	22	3	97.0x79.0x1.5
TL32L050	32	8F	St.	1108	97.02	96.26	102	74	-	19	22	3	102.0x82.5x1.5
TL36L050	36	8F	St.	1108	109.15	108.39	115	85	-	19	22	3	115.0x94.0x1.5
TL40L050	40	8F	St.	1610	121.28	120.51	128	88	-	19	25	6	128.0x107.0x1.5
TL44L050	44	8WF	St.	1610	133.4	132.64	142	88	110	19	25	6	142.0x120.0x1.5
TL48L050	48	8WF	St.	1610	145.53	144.77	150	88	120	19	25	6	150.0x130.0x1.5
TL60L050	60	7W	St.	1610	181.91	181.15	-	92	166	19	25	3	-
TL72L050	72	7A	C.I.	1610	218.3	217.53	-	92	202	19	25	3	-
TL84L050	84	7A	C.I.	1610	254.68	253.9	-	92	236	19	25	3	-
TL96L050	96	7A	C.I.	2012	291.06	290.3	-	106	270	19	32	6.5	-
TL120L050	120	7A	C.I.	2012	363.83	363.07	-	106	343	19	32	6.5	-

Notes:

Flange dimension O.D.x I.D. x thickness

Taper Lock Timing Pulleys -- L075 (For Belt - 9.525 Pitch x 19.05 Wide) 3/8"x3/4"

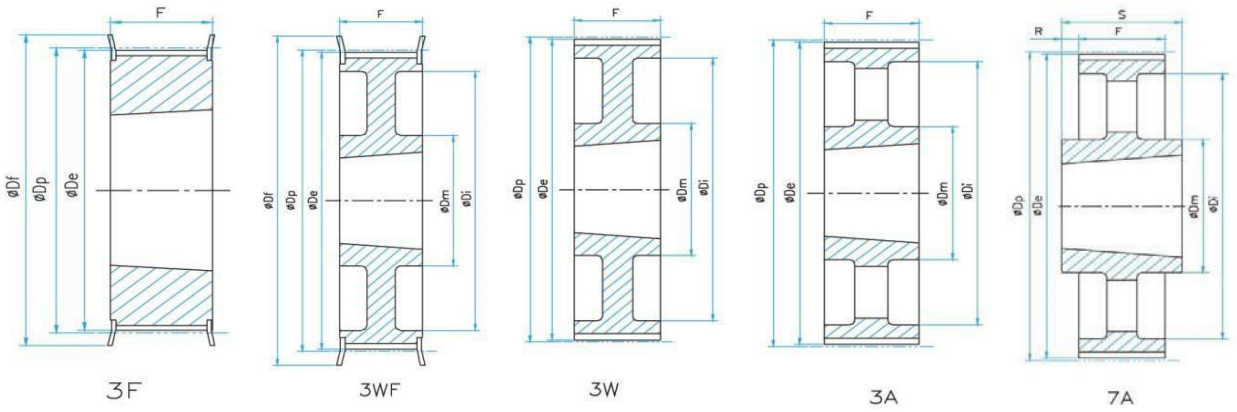


Part No.	Teeth No.	Type	Mat'l	Bush No.	**Dp**	**De**	**Df**	**Dm**	**Di**	**F**	**S**	**R**	Flange Dimension
TL18L075	18	3F	St.	1108	54.57	53.81	60	-	-	25	25	-	60.0x48.0x1.5
TL19L075	19	3F	St.	1108	57.61	56.84	64	-	-	25	25	-	64.0x47.0x1.5
TL20L075	20	3F	St.	1108	60.64	59.88	66.5	-	-	25	25	-	66.5x53.0x1.5
TL21L075	21	3F	St.	1108	63.67	62.91	70	-	-	25	25	-	70.0x53.0x1.5
TL22L075	22	3F	St.	1108	66.7	65.94	75	-	-	25	25	-	75.0x57.0x1.5
TL23L075	23	3F	St.	1108	69.73	68.97	79	-	-	25	25	-	79.0x60.0x1.5
TL24L075	24	3F	St.	1108	72.77	72	79	-	-	25	25	-	79.0x60.0x1.5
TL25L075	25	3F	St.	1108	75.8	75.04	82.5	-	-	25	25	-	82.5x64.0x1.5
TL26L075	26	3F	St.	1108	78.83	78.07	86	-	-	25	25	-	86.0x68.0x1.5
TL27L075	27	3F	St.	1108	81.86	81.1	86	-	-	25	25	-	86.0x68.0x1.5
TL28L075	28	3F	St.	1108	84.89	84.13	91	-	-	25	25	-	91.0x73.0x1.5
TL30L075	30	3F	St.	1108	90.96	90.2	97	-	-	25	25	-	97.0x79.0x1.5
TL32L075	32	3F	St.	1108	97.02	96.26	102	-	-	25	25	-	102.0x82.5x1.5
TL36L075	36	3F	St.	1610	109.15	108.39	115	-	-	25	25	-	115.0x94.0x1.5
TL40L075	40	3F	St.	1610	121.28	120.51	128	-	-	25	25	-	128.0x107.0x1.5
TL44L075	44	3WF	St.	1610	133.4	132.64	142	90	110	25	25	-	142.0x120.0x1.5
TL48L075	48	3WF	St.	1610	145.53	144.77	150	92	120	25	25	-	150.0x130.0x1.5
TL60L075	60	3W	St.	1610	181.91	181.15	-	92	166	25	25	-	-
TL72L075	72	3A	C.I.	1610	218.3	217.53	-	92	202	25	25	-	-
TL84L075	84	7A	C.I.	1610	254.68	253.9	-	92	236	25	32	3.5	-
TL96L075	96	7A	C.I.	2012	291.06	290.3	-	106	270	25	32	3.5	-
TL120L075	120	7A	C.I.	2012	363.83	363.07	-	106	343	25	32	3.5	-

Notes:

Flange dimension O.D.x I.D. x thickness

Taper Lock Timing Pulleys -- L100 (For Belt - 9.525 Pitch x 25.4 Wide) 3/8"x1"

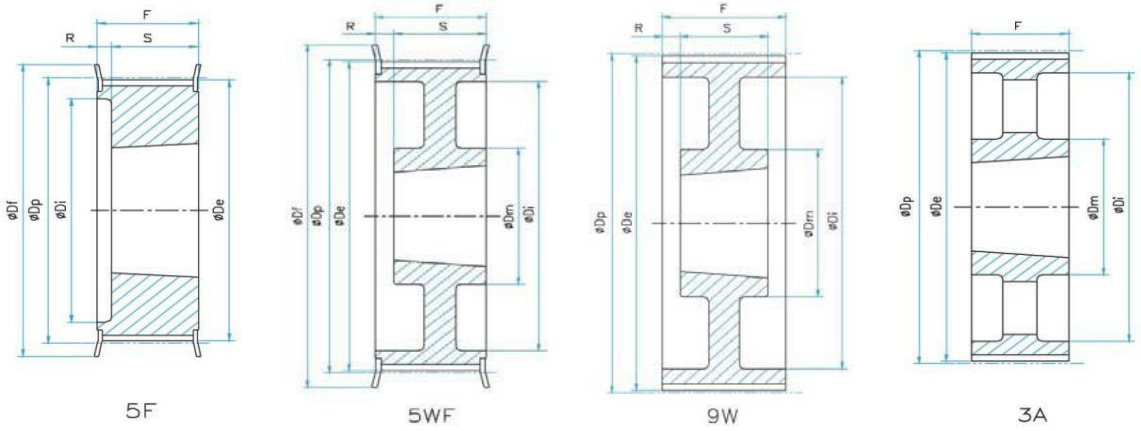


Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL18L100	18	5F	St.	1108	54.57	53.81	60	-	38	31	22	9	60.0x48.0x1.5
TL19L100	19	5F	St.	1108	57.61	56.84	64	-	38	31	22	9	64.0x47.0x1.5
TL20L100	20	5F	St.	1108	60.64	59.88	66.5	-	45	31	22	9	66.5x53.0x1.5
TL21L100	21	5F	St.	1108	63.67	62.91	70	-	45	31	22	9	70.0x53.0x1.5
TL22L100	22	5F	St.	1108	66.7	65.94	75	-	48	31	22	9	75.0x57.0x1.5
TL23L100	23	5F	St.	1108	69.73	68.97	79	-	52	32	22	10	79.0x60.0x1.5
TL24L100	24	5F	St.	1108	72.77	72	79	-	52	32	22	10	79.0x60.0x1.5
TL25L100	25	5F	St.	1108	75.8	75.04	82.5	-	54	32	22	10	82.5x64.0x1.5
TL26L100	26	5F	St.	1108	78.83	78.07	86	-	60	32	22	10	86.0x68.0x1.5
TL27L100	27	5F	St.	1108	81.86	81.1	86	-	60	32	22	10	86.0x68.0x1.5
TL28L100	28	5F	St.	1108	84.89	84.13	91	-	65	32	22	10	91.0x73.0x1.5
TL30L100	30	5F	St.	1210	90.96	90.2	97	-	71	32	25	7	97.0x79.0x1.5
TL32L100	32	5F	St.	1210	97.02	96.26	102	-	75	32	25	7	102.0x82.5x1.5
TL36L100	36	5F	St.	1610	109.15	108.39	115	-	86	32	25	7	115.0x94.0x1.5
TL40L100	40	5F	St.	1610	121.28	120.51	128	-	96	32	25	7	128.0x107.0x1.5
TL44L100	44	5WF	St.	1610	133.4	132.64	142	90	110	32	25	7	142.0x120.0x1.5
TL48L100	48	5WF	St.	1610	145.53	144.77	150	92	120	32	25	7	150.0x130.0x1.5
TL60L100	60	9W	St.	1610	181.91	181.15	-	92	166	32	25	3.5	-
TL72L100	72	3A	C.I.	2012	218.3	217.53	-	92	202	32	32	0	-
TL84L100	84	3A	C.I.	2012	254.68	253.9	-	92	236	32	32	0	-
TL96L100	96	3A	C.I.	2012	291.06	290.3	-	106	270	32	32	0	-
TL120L100	120	3A	C.I.	2012	363.83	363.07	-	106	343	32	32	0	-

Notes:

Flange dimension O.D.x I.D. x thickness

Taper Lock Timing Pulleys – H100 (For Belt - 12.7 Pitch x 25.4 Wide) 1/2"x1"

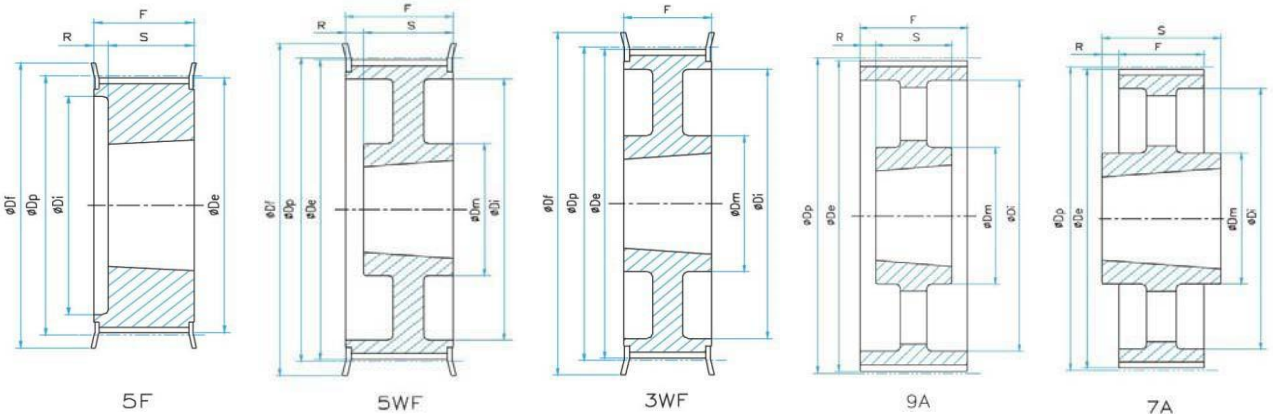


Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL16H100	16	5F	St.	1108	64.68	63.31	70	-	45	31	22	9	70.0x53.0x1.5
TL18H100	18	5F	St.	1210	72.77	71.39	79	-	52	31	25	6	79.0x60.0x1.5
TL19H100	19	5F	St.	1210	76.81	75.44	82.5	-	56	31	25	6	82.5x64.0x1.5
TL20H100	20	5F	St.	1210	80.85	79.48	87	-	60	31	25	6	87.0x72.0x1.5
TL21H100	21	5F	St.	1210	84.89	83.52	91	-	64	32	25	7	91.0x73.0x1.5
TL22H100	22	5F	St.	1210	88.94	87.56	94	-	67	32	25	7	94.0x76.0x1.5
TL23H100	23	5F	St.	1610	92.98	91.61	97	-	70	32	25	7	97.0x79.0x1.5
TL24H100	24	5F	St.	1610	97.02	95.65	102	-	74	32	25	7	102.0x82.5x1.5
TL25H100	25	5F	St.	1610	101.06	99.69	106	-	77	32	25	7	106.0x86.0x1.5
TL26H100	26	5F	St.	1610	105.11	103.73	112	-	82	32	25	7	112.0x91.0x1.5
TL27H100	27	5F	St.	1610	109.15	107.78	115	-	85	32	25	7	115.0x94.0x1.5
TL28H100	28	5F	St.	1610	113.19	111.82	120	-	90	32	25	7	120.0x99.5.0x1.5
TL30H100	30	5F	St.	1610	121.28	111.9	128	-	98	32	25	7	128.0x107.0x1.5
TL32H100	32	5WF	St.	1610	129.36	127.99	135	80	106	32	25	7	135.0x115.0x1.5
TL36H100	36	5WF	St.	1610	145.53	144.16	150	92	121	32	25	7	150.0x130.0x1.5
TL40H100	40	5WF	St.	1610	161.7	160.33	168	92	138	32	25	7	168.0x148.0x1.5
TL44H100	44	3WF	St.	2012	177.87	176.5	184	106	152	32	32	0	184.0x162.0x1.5
TL48H100	48	3WF	St.	2012	194.04	192.67	200	106	169	32	32	0	200.0x180.0x1.5
TL60H100	60	9A	C.I.	2012	242.55	241.18	-	92	223	34	32	1	-
TL72H100	72	9A	C.I.	2012	291.06	289.69	-	92	270	34	32	1	-
TL84H100	84	9A	C.I.	2012	339.57	338.2	-	92	318	34	32	1	-
TL96H100	96	7A	C.I.	2517	388.08	386.71	-	106	366	34	45	5.5	-
TL120H100	120	7A	C.I.	2517	485.1	483.73	-	106	462	34	45	5.5	-

Notes:

Flange dimension O.D.x I.D. x thickness


Taper Lock Timing Pulleys -- H150 (For Belt - 12.7 Pitch x 38.1 Wide) 1/2"x1-1/2"

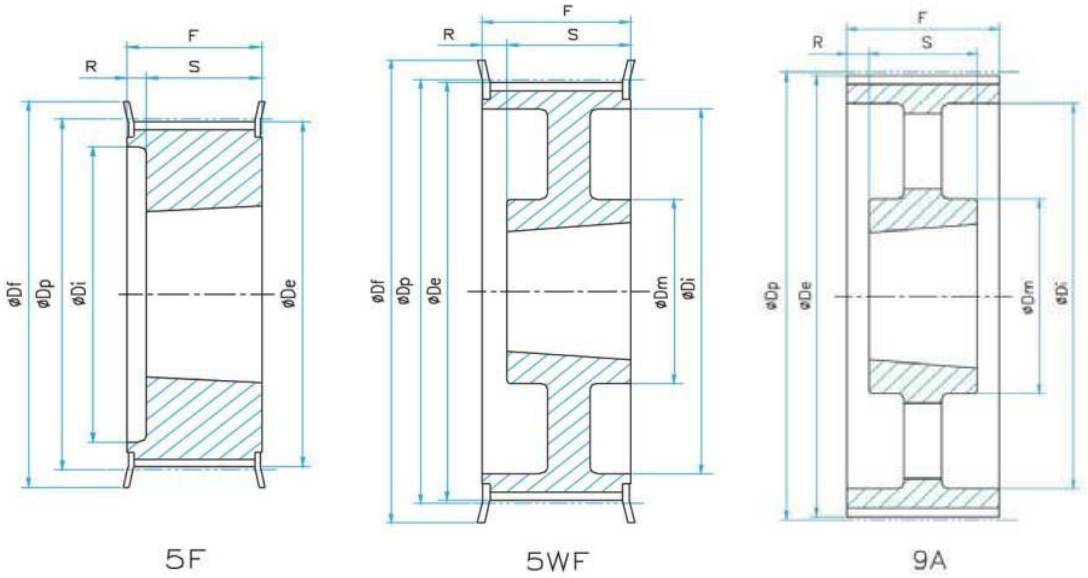

Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL18H150	18	5F	St.	1210	72.77	71.39	79	-	52	45	25	20	79.0x60.0x1.5
TL19H150	19	5F	St.	1210	76.81	75.44	82.5	-	56	45	25	20	82.5x64.0x1.5
TL20H150	20	5F	St.	1210	80.85	79.48	87	-	60	45	25	20	87.0x72.0x1.5
TL21H150	21	5F	St.	1210	84.89	83.52	91	-	64	45	25	20	91.0x73.0x1.5
TL22H150	22	5F	St.	1210	88.94	87.56	94	-	67	45	25	20	94.0x76.0x1.5
TL23H150	23	5F	St.	1610	92.98	91.61	97	-	70	45	25	20	97.0x79.0x1.5
TL24H150	24	5F	St.	1610	97.02	95.65	102	-	74	45	25	20	102.0x82.5x1.5
TL25H150	25	5F	St.	1610	101.06	99.69	106	-	77	45	25	20	106.0x86.0x1.5
TL26H150	26	5F	St.	1610	105.11	103.73	112	-	82	45	25	20	112.0x91.0x1.5
TL27H150	27	5F	St.	1610	109.15	107.78	115	-	85	45	25	20	115.0x94.0x1.5
TL28H150	28	5F	St.	1610	113.19	111.82	120	-	90	45	25	20	120.0x99.5.0x1.5
TL30H150	30	5F	St.	1610	121.28	111.9	128	-	98	45	25	20	128.0x107.0x1.5
TL32H150	32	5WF	St.	1610	129.36	127.99	135	80	106	45	25	20	135.0x115.0x1.5
TL36H150	36	5WF	St.	1610	145.53	144.16	150	92	121	45	25	20	150.0x130.0x1.5
TL40H150	40	5WF	St.	1610	161.7	160.33	168	92	138	45	25	20	168.0x148.0x1.5
TL44H150	44	5WF	St.	2012	177.87	176.5	184	106	152	45	32	13	184.0x162.0x1.5
TL48H150	48	5WF	St.	2012	194.04	192.67	200	106	169	45	32	13	200.0x180.0x1.5
TL60H150	60	9A	C.I.	2012	242.55	241.18	-	92	223	46	32	7.5	-
TL72H150	72	9A	C.I.	2012	291.06	289.69	-	92	270	46	32	7.5	-
TL84H150	84	9A	C.I.	2012	339.57	338.2	-	92	318	46	32	7.5	-
TL96H150	96	9A	C.I.	2517	388.08	386.71	-	106	366	46	45	0.5	-
TL120H150	120	9A	C.I.	2517	485.1	483.73	-	106	462	46	45	0.5	-

Notes:
Flange dimension O.D.x I.D. x thickness

Taper Lock Timing Pulleys -- H200 (For Belt - 12.7 Pitch x 50.8 Wide) 1/2"x 2"

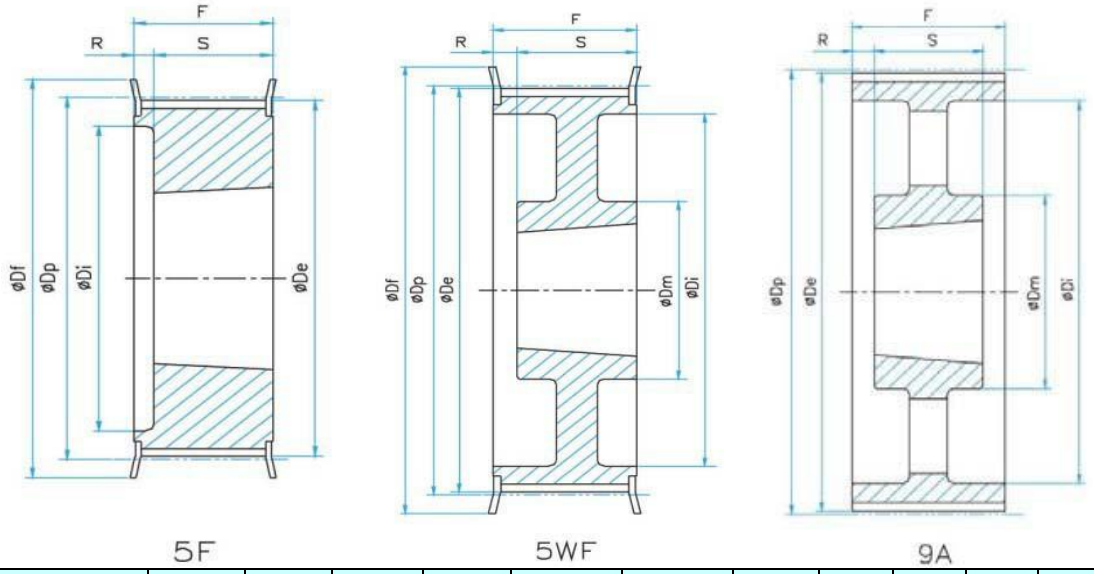


Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL18H200	18	5F	St.	1210	72.77	71.39	79	-	52	58	25	33	79.0x60.0x1.5
TL19H200	19	5F	St.	1210	76.81	75.44	82.5	-	56	58	25	33	82.5x64.0x1.5
TL20H200	20	5F	St.	1610	80.85	79.48	87	-	60	58	25	33	87.0x72.0x1.5
TL21H200	21	5F	St.	1610	84.89	83.52	91	-	64	58	25	33	91.0x73.0x1.5
TL22H200	22	5F	St.	1610	88.94	87.56	94	-	67	58	25	33	94.0x76.0x1.5
TL23H200	23	5F	St.	1610	92.98	91.61	97	-	70	58	25	33	97.0x79.0x1.5
TL24H200	24	5F	St.	1610	97.02	95.65	102	-	74	58	25	33	102.0x82.5x1.5
TL25H200	25	5F	St.	1610	101.06	99.69	106	-	77	58	25	33	106.0x86.0x1.5
TL26H200	26	5F	St.	1610	105.11	103.73	112	-	82	58	25	33	112.0x91.0x1.5
TL27H200	27	5F	St.	1610	109.15	107.78	115	-	85	58	25	33	115.0x94.0x1.5
TL28H200	28	5F	St.	1610	113.19	111.82	120	-	90	58	25	33	120.0x99.5.0x1.5
TL30H200	30	5F	St.	1610	121.28	111.9	128	-	98	58	25	33	128.0x107.0x1.5
TL32H200	32	5F	St.	2012	129.36	127.99	135	-	106	58	32	26	135.0x115.0x1.5
TL36H200	36	5WF	St.	2012	145.53	144.16	150	102	121	58	32	26	150.0x130.0x1.5
TL40H200	40	5WF	St.	2012	161.7	160.33	168	106	138	58	32	26	168.0x148.0x1.5
TL44H200	44	5WF	St.	2012	177.87	176.5	184	106	152	58	32	26	184.0x162.0x1.5
TL48H200	48	5WF	St.	2517	194.04	192.67	200	119	169	58	45	13	200.0x180.0x1.5
TL60H200	60	9A	C.I.	2517	242.55	241.18	-	119	223	60	45	7.5	-
TL72H200	72	9A	C.I.	2517	291.06	289.69	-	119	270	60	45	7.5	-
TL84H200	84	9A	C.I.	2517	339.57	338.2	-	119	318	60	45	7.5	-
TL96H200	96	9A	C.I.	2517	388.08	386.71	-	119	366	60	45	7.5	-
TL120H200	120	9A	C.I.	2517	485.1	483.73	-	119	462	60	45	7.5	-

Notes:

Flange dimension O.D.x I.D. x thickness

Taper Lock Timing Pulleys -- H300 (For Belt - 12.7 Pitch x 76.2 Wide) 1/2"x 3"

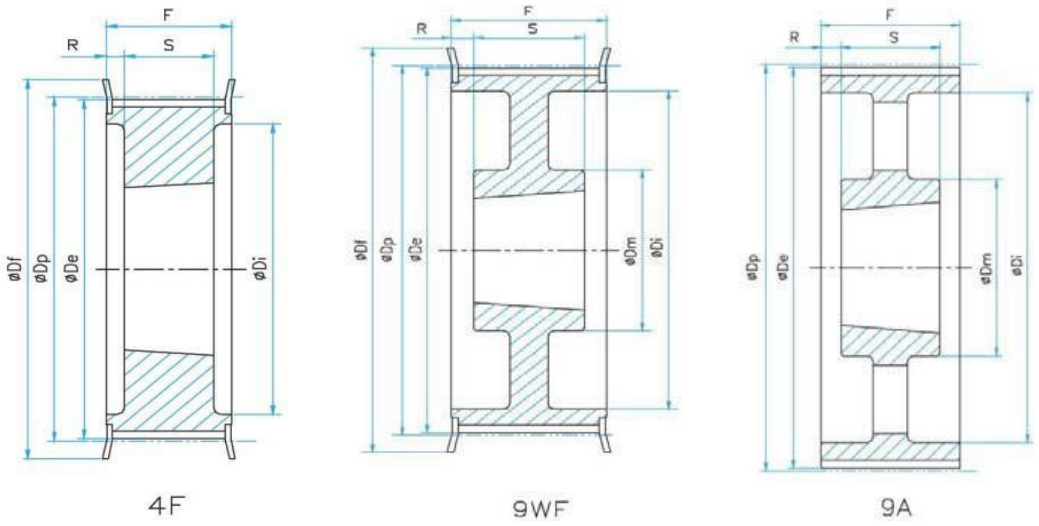


Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL20H300	20	4F	St.	1615	80.85	79.48	87	-	60	84	38	23	87.0x72.0x1.5
TL21H300	21	4F	St.	1615	84.89	83.52	91	-	64	84	38	23	91.0x73.0x1.5
TL22H300	22	4F	St.	1615	88.94	87.56	94	-	67	84	38	23	94.0x76.0x1.5
TL23H300	23	4F	St.	1615	92.98	91.61	97	-	70	84	38	23	97.0x79.0x1.5
TL24H300	24	4F	St.	1615	97.02	95.65	102	-	74	84	38	23	102.0x82.5x1.5
TL25H300	25	4F	St.	1615	101.06	99.69	106	-	77	84	38	23	106.0x86.0x1.5
TL26H300	26	4F	St.	1615	105.11	103.73	112	-	82	84	38	23	112.0x91.0x1.5
TL27H300	27	4F	St.	2012	109.15	107.78	115	-	85	84	32	26	115.0x94.0x1.5
TL28H300	28	4F	St.	2012	113.19	111.82	120	-	90	84	32	26	120.0x99.5.0x1.5
TL30H300	30	4F	St.	2012	121.28	111.9	128	-	98	84	32	26	128.0x107.0x1.5
TL32H300	32	4F	St.	2517	129.36	127.99	135	-	106	84	45	19.5	135.0x115.0x1.5
TL36H300	36	4F	St.	2517	145.53	144.16	150	-	121	84	45	19.5	150.0x130.0x1.5
TL40H300	40	4F	St.	2517	161.7	160.33	168	-	138	84	45	19.5	168.0x148.0x1.5
TL44H300	44	9WF	St.	2517	177.87	176.5	184	119	152	86	45	20.5	184.0x162.0x1.5
TL48H300	48	9WF	St.	2517	194.04	192.67	200	119	169	86	45	20.5	200.0x180.0x1.5
TL60H300	60	9A	C.I.	2517	242.55	241.18	-	119	223	86	45	20.5	-
TL72H300	72	9A	C.I.	2517	291.06	289.69	-	119	270	86	45	20.5	-
TL84H300	84	9A	C.I.	2517	339.57	338.2	-	119	318	86	45	20.5	-
TL96H300	96	9A	C.I.	3030	388.08	386.71	-	150	366	86	76	5	-
TL120H300	120	9A	C.I.	3030	485.1	483.73	-	150	462	86	76	5	-

Notes:

Flange dimension O.D.x I.D. x thickness

Taper Lock Timing Pulleys -- XH200 (For Belt - 22.225 Pitch x 50.8 Wide) 7/8"x 2"

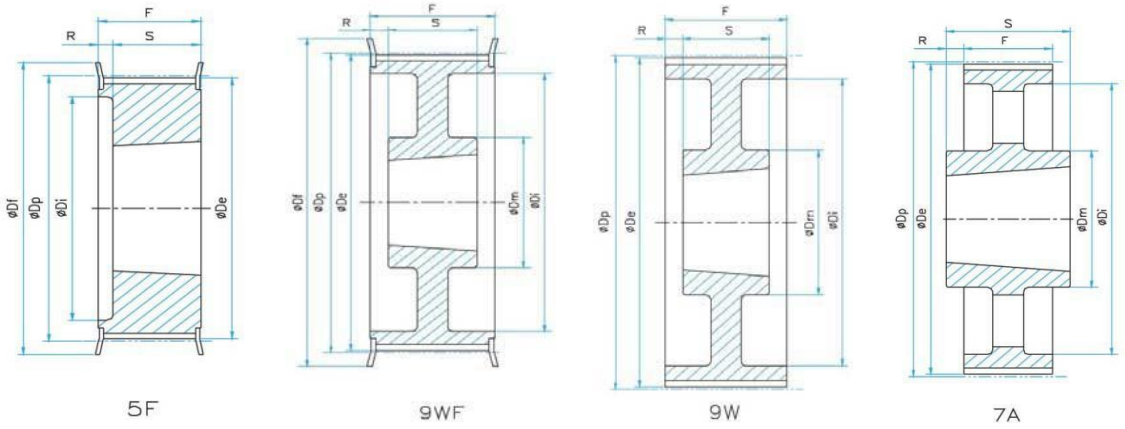


Part No.	Teeth No.	Type	Mat'l	Bush No.	**Dp**	**De**	**Df**	**Dm**	**Di**	**F**	**S**	**R**	Flange Dimension
TL18XH200	18	5F	C.I.	2517	127.34	124.55	140	-	95	64	45	19	147.0x107.0x2.5
TL20XH200	20	5F	C.I.	2517	141.49	138.69	155	-	110	64	45	19	155.0x107.0x2.5
TL22XH200	22	5F	C.I.	2517	155.64	152.84	170	-	120	64	45	19	170.0x120.0x2.5
TL24XH200	24	5F	C.I.	2517	169.79	166.99	184	-	135	64	45	19	184.0x135.0x2.5
TL26XH200	26	5F	C.I.	2517	183.94	181.14	198	-	150	64	45	19	198.0x150.0x2.5
TL28XH200	28	9WF	C.I.	2517	198.08	195.29	212	120	165	64	45	9.5	212.0x162.0x2.5
TL30XH200	30	9WF	C.I.	2517	212.23	209.44	227	120	180	64	45	9.5	227.0x176.0x2.5
TL32XH200	32	9WF	C.I.	2517	226.38	223.59	240	120	195	64	45	9.5	240.0x192.0x2.5
TL40XH200	40	9WF	C.I.	3020	282.98	280.18	297	160	245	64	51	9.5	297.0x249.0x2.5
TL48XH200	48	9W	C.I.	3020	339.57	336.78	-	160	300	64	51	6.5	-
TL60XH200	60	7A	C.I.	3535	424.47	421.67	-	190	385	64	89	12.5	-
TL72XH200	72	7A	C.I.	3535	509.36	506.56	-	190	470	64	89	12.5	-
TL84XH200	84	7A	C.I.	3535	594.25	591.46	-	190	555	64	89	12.5	-
TL96XH200	96	7A	C.I.	3535	679.15	676.35	-	190	640	64	89	12.5	-
TL120XH20	120	7A	C.I.	3535	848.93	846.14	-	190	810	64	89	12.5	-

Notes:

Flange dimension O.D.x I.D. x thickness


Taper Lock Timing Pulleys -- XH300 (For Belt - 22.225 Pitch x 76.2 Wide) 7/8"x 3"

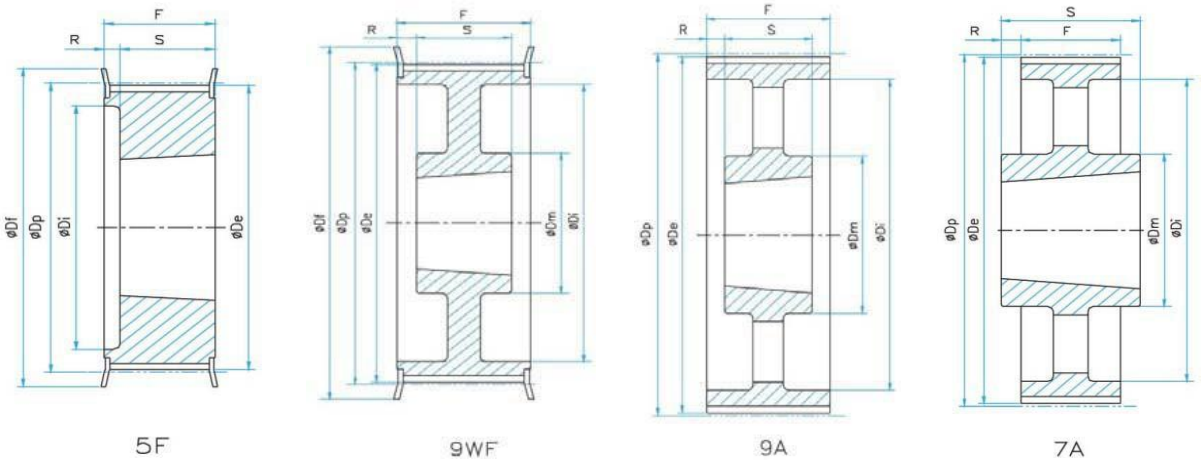

Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL18XH300	18	5F	C.I.	2517	127.34	124.55	140	-	95	90	45	45	147.0x107.0x2.5
TL20XH300	20	5F	C.I.	2517	141.49	138.69	155	-	110	90	45	45	155.0x107.0x2.5
TL22XH300	22	5F	C.I.	2517	155.64	152.84	170	-	120	90	45	45	170.0x120.0x2.5
TL24XH300	24	5F	C.I.	2517	169.79	166.99	184	-	135	90	45	45	184.0x135.0x2.5
TL26XH300	26	5F	C.I.	2517	183.94	181.14	198	-	150	90	45	45	198.0x150.0x2.5
TL28XH300	28	5F	C.I.	3020	198.08	195.29	212	-	165	90	51	39	212.0x162.0x2.5
TL30XH300	30	5F	C.I.	3020	212.23	209.44	227	-	180	90	51	39	227.0x176.0x2.5
TL32XH300	32	5F	C.I.	3020	226.38	223.59	240	-	195	90	51	39	240.0x192.0x2.5
TL40XH300	40	9WF	C.I.	3020	282.98	280.18	297	160	245	90	51	19.5	297.0x249.0x2.5
TL48XH300	48	9A	C.I.	3020	339.57	336.78	-	160	300	90	51	19.5	-
TL60XH300	60	9A	C.I.	3535	424.47	421.67	-	190	385	90	89	0.5	-
TL72XH300	72	9A	C.I.	3535	509.36	506.56	-	190	470	90	89	0.5	-
TL84XH300	84	7A	C.I.	4040	594.25	591.46	-	190	555	90	102	6	-
TL96XH300	96	7A	C.I.	4040	679.15	676.35	-	190	640	90	102	6	-
TL120XH30	120	7A	C.I.	4040	848.93	846.14	-	190	810	90	102	6	-

Notes:
Flange dimension O.D.x I.D. x thickness

Taper Lock Timing Pulleys -- XH400 (For Belt - 22.225 Pitch x 101.6 Wide) 7/8"x 4"

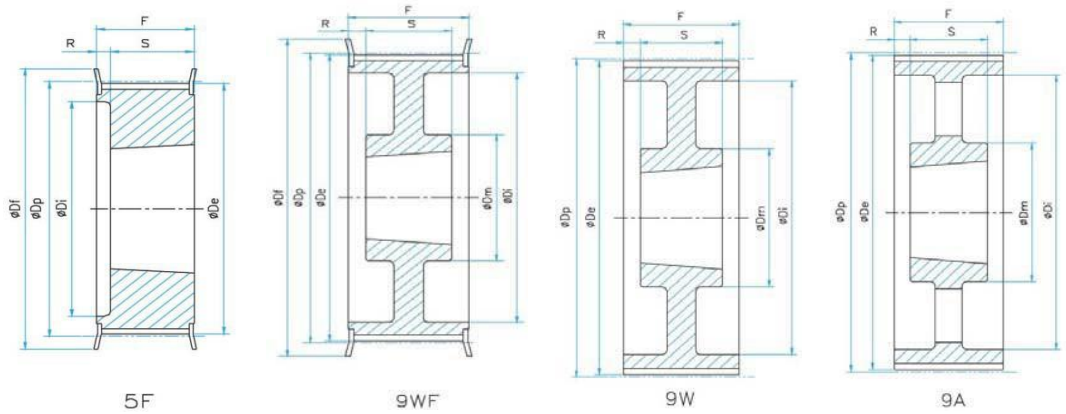


Part No.	Teeth No.	Type	Mat'l	Bush No.	**Dp**	**De**	**Df**	**Dm**	**Di**	**F**	**S**	**R**	Flange Dimension
TL18XH400	18	5F	C.I.	2517	127.34	124.55	140	-	95	119	45	74	147.0x107.0x2.5
TL20XH400	20	5F	C.I.	2517	141.49	138.69	155	-	110	119	45	74	155.0x107.0x2.5
TL22XH400	22	5F	C.I.	2517	155.64	152.84	170	-	120	119	45	74	170.0x120.0x2.5
TL24XH400	24	5F	C.I.	3020	169.79	166.99	184	-	135	119	51	68	184.0x135.0x2.5
TL26XH400	26	5F	C.I.	3020	183.94	181.14	198	-	150	119	51	68	198.0x150.0x2.5
TL28XH400	28	5F	C.I.	3020	198.08	195.29	212	-	165	119	51	68	212.0x162.0x2.5
TL30XH400	30	5F	C.I.	3020	212.23	209.44	227	-	180	119	51	68	227.0x176.0x2.5
TL32XH400	32	5F	C.I.	3020	226.38	223.59	240	-	195	119	51	68	240.0x192.0x2.5
TL40XH400	40	9WF	C.I.	3535	282.98	280.18	297	160	245	119	89	15	297.0x249.0x2.5
TL48XH400	48	9W	C.I.	3535	339.57	336.78	-	160	300	119	89	15	-
TL60XH400	60	9A	C.I.	4040	424.47	421.67	-	190	385	119	102	8.5	-
TL72XH400	72	9A	C.I.	4040	509.36	506.56	-	190	470	119	102	8.5	-
TL84XH400	84	9A	C.I.	4040	594.25	591.46	-	190	555	119	102	8.5	-
TL96XH400	96	9A	C.I.	4040	679.15	676.35	-	190	640	119	102	8.5	-
TL120XH40	120	9A	C.I.	4040	848.93	846.14	-	190	810	119	102	8.5	-


Notes:

Flange dimension O.D.x I.D. x thickness


Timing Pulleys -- 16T2.5 (For Belt - 2.5mm Pitch x 6mm Wide)

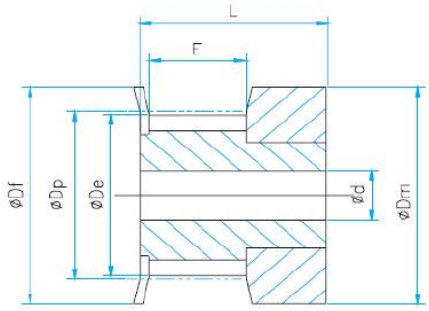

1F



6F



6


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
16T2.5-12-2	12	1F	Alu.	9.6	9	13	13	9	16	solid	13x6x0.5
16T2.5-14-2	14	1F	Alu.	11.2	10.6	15	15	9	16	solid	15x8x0.5
16T2.5-15-2	15	1F	Alu.	12	11.4	15	15	9	16	solid	15x8x0.5
16T2.5-16-2	16	1F	Alu.	12.8	12.2	16	16	9	16	solid	16x9.5x0.5
16T2.5-18-2	18	6F	Alu.	14.4	13.8	17.5	10	10	16	solid	17.5x11.6x0.5
16T2.5-19-2	19	6F	Alu.	15.2	14.6	20	10	10	16	solid	20x12.2x0.5
16T2.5-20-2	20	6F	Alu.	16	15.4	20	11	10	16	solid	20x12.2x0.5
16T2.5-22-2	22	6F	Alu.	17.6	17	22	11	10	16	solid	22x14.5x0.5
16T2.5-24-2	24	6F	Alu.	19.15	18.55	22	12	10	16	solid	22x14.5x0.5
16T2.5-25-2	25	6F	Alu.	19.95	19.35	23	13	10	16	solid	25x14.5x0.5
16T2.5-26-2	26	6F	Alu.	20.75	20.15	26	14	10	16	solid	26x17.8x0.5
16T2.5-28-2	28	6F	Alu.	22.35	21.75	26	14	10	16	solid	26x17.8x0.5
16T2.5-30-2	30	6F	Alu.	23.95	23.35	28	16	10	16	6	28x20x0.5
16T2.5-32-2	32	6F	Alu.	25.55	24.95	32	16	10	16	6	32x23x0.5
16T2.5-36-2	36	6F	Alu.	28.75	28.1	36	20	10	16	6	36x25x0.5
16T2.5-40-2	40	6F	Alu.	31.9	31.3	38	22	10	16	6	38x26.5x0.5
16T2.5-44-0	44	6	Alu.	35.1	34.5	-	24	10	16	6	-
16T2.5-48-0	48	6	Alu.	38.3	37.7	-	26	10	16	6	-
16T2.5-60-0	60	6	Alu.	47.85	47.25	-	34	10	16	8	-

Notes:

Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Timing Pulleys -- 21T5 (For Belt - 5mm Pitch x 10mm Wide)

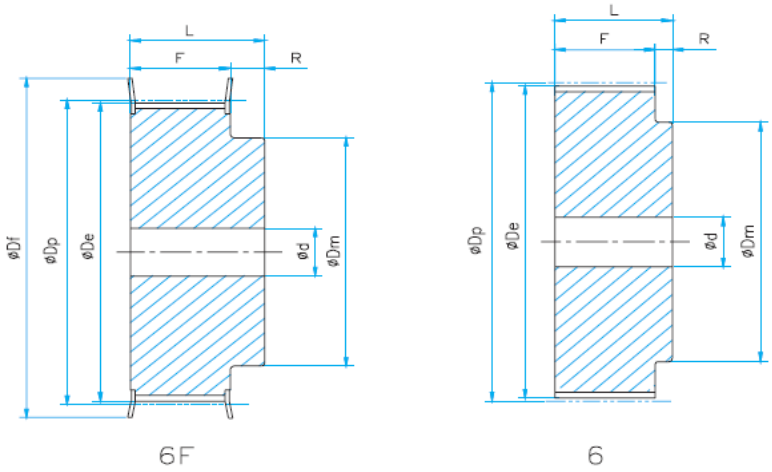


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
21T5-10-2	10	6F	Alu.	16.05	15.05	19.5	8	15	21	solid	19.5x12x1.0
21T5-12-2	12	6F	Alu.	19.25	18.25	23	11	15	21	solid	23x12.5x1.0
21T5-14-2	14	6F	Alu.	22.45	21.45	25	13	15	21	solid	25x15x1.0
21T5-15-2	15	6F	Alu.	24.05	23.05	28	16	15	21	solid	28x17.8x1.0
21T5-16-2	16	6F	Alu.	25.6	24.6	32	18	15	21	solid	32x20x1.0
21T5-18-2	18	6F	Alu.	28.8	27.8	32	20	15	21	solid	32x23x1.0
21T5-19-2	19	6F	Alu.	30.4	29.4	36	20	15	21	solid	36x25x1.0
21T5-20-2	20	6F	Alu.	32	31	36	22	15	21	solid	36x25x1.0
21T5-22-2	22	6F	Alu.	32.15	34.15	38	23	15	21	solid	38x26.5x1.0
21T5-24-2	24	6F	Alu.	38.4	37.4	42	24	15	21	solid	42x30.5x1.0
21T5-25-2	25	6F	Alu.	39.95	38.95	44	26	15	21	solid	44x32.5x1.0
21T5-26-2	26	6F	Alu.	41.6	40.6	44	26	15	21	solid	44x32.5x1.0
21T5-27-2	27	6F	Alu.	43.2	42.2	48	30	15	21	8	48x37x1.0
21T5-28-2	28	6F	Alu.	44.75	43.75	48	32	15	21	8	48x37x1.0
21T5-30-2	30	6F	Alu.	47.95	46.95	51	34	15	21	8	51x40x1.0
21T5-32-2	32	6F	Alu.	51.1	50.1	54	38	15	21	8	54x43x1.0
21T5-36-2	36	6F	Alu.	57.45	56.45	64	38	15	21	8	64x47x1.0
21T5-40-2	40	6F	Alu.	63.85	62.85	66.5	40	15	21	8	66.5x52x1.0
21T5-42-2	42	6F	Alu.	67	66	70	40	15	21	8	70x53x1.0
21T5-44-0	44	6	Alu.	70.2	69.2	-	45	15	21	8	-
21T5-48-0	48	6	Alu.	76.55	75.55	-	50	15	21	8	-
21T5-60-0	60	6	Alu.	95.65	94.65	-	65	15	21	8	-

Notes:

Setscrew hole are available upon request
Flange dimension O.D.x I.D. x thickness

Timing Pulleys -- 27T5 (For Belt - 5mm Pitch x 16mm Wide)

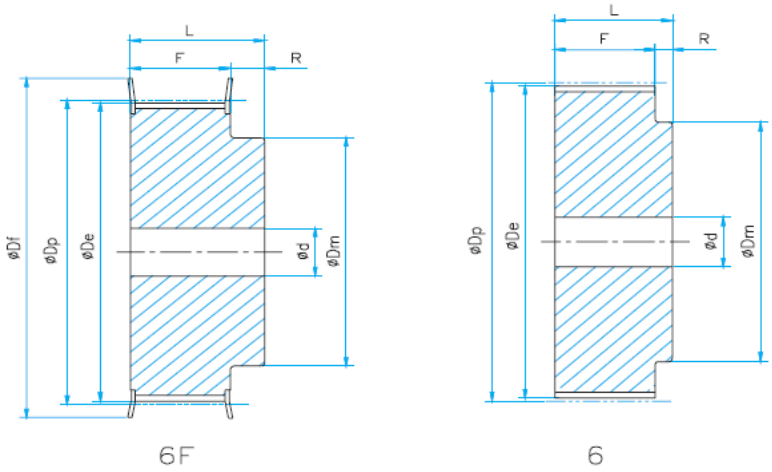


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
27T5-10-2	10	6F	Alu.	16.05	15.05	19.5	8	21	27	solid	19.5x12x1.0
27T5-12-2	12	6F	Alu.	19.25	18.25	23	11	21	27	solid	23x12.5x1.0
27T5-14-2	14	6F	Alu.	22.45	21.45	25	13	21	27	solid	25x15x1.0
27T5-15-2	15	6F	Alu.	24.05	23.05	28	16	21	27	solid	28x17.8x1.0
27T5-16-2	16	6F	Alu.	25.6	24.6	32	18	21	27	solid	32x20x1.0
27T5-18-2	18	6F	Alu.	28.8	27.8	32	20	21	27	solid	32x23x1.0
27T5-19-2	19	6F	Alu.	30.4	29.4	36	20	21	27	solid	36x25x1.0
27T5-20-2	20	6F	Alu.	32	31	36	22	21	27	solid	36x25x1.0
27T5-22-2	22	6F	Alu.	32.15	34.15	38	23	21	27	solid	38x26.5x1.0
21T5-24-2	24	6F	Alu.	38.4	37.4	42	24	21	27	solid	42x30.5x1.0
27T5-25-2	25	6F	Alu.	39.95	38.95	44	26	21	27	solid	44x32.5x1.0
27T5-26-2	26	6F	Alu.	41.6	40.6	44	26	21	27	solid	44x32.5x1.0
27T5-27-2	27	6F	Alu.	43.2	42.2	48	30	21	27	8	48x37x1.0
27T5-28-2	28	6F	Alu.	44.75	43.75	48	32	21	27	8	48x37x1.0
27T5-30-2	30	6F	Alu.	47.95	46.95	51	34	21	27	8	51x40x1.0
27T5-32-2	32	6F	Alu.	51.1	50.1	54	38	21	27	8	54x43x1.0
27T5-36-2	36	6F	Alu.	57.45	56.45	64	38	21	27	8	64x47x1.0
27T5-40-2	40	6F	Alu.	63.85	62.85	66.5	40	21	27	8	66.5x52x1.0
27T5-42-2	42	6F	Alu.	67	66	70	40	21	27	8	70x53x1.0
27T5-44-0	44	6	Alu.	70.2	69.2	-	45	21	27	8	-
27T5-48-0	48	6	Alu.	76.55	75.55	-	50	21	27	8	-
27T5-60-0	60	6	Alu.	95.65	94.65	-	65	21	27	8	-


Notes:

Setscrew hole are available upon request
Flange dimension O.D.x I.D. x thickness

Timing Pulleys -- 36T5 (For Belt - 5mm Pitch x 25 Wide)

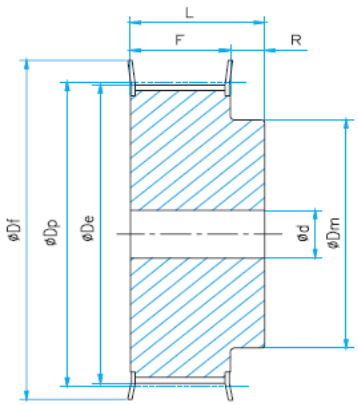

6F

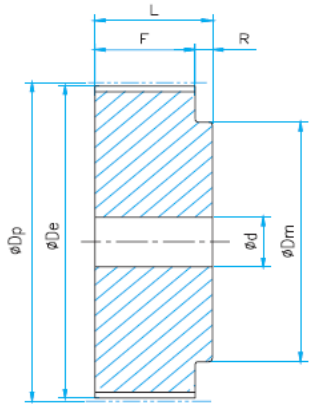


6

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
36T5-10-2	10	6F	Alu.	16.05	15.05	19.5	8	30	36	solid	19.5x12x1.0
36T5-12-2	12	6F	Alu.	19.25	18.25	23	11	30	36	solid	23x12.5x1.0
36T5-14-2	14	6F	Alu.	22.45	21.45	25	13	30	36	solid	25x15x1.0
36T5-15-2	15	6F	Alu.	24.05	23.05	28	16	30	36	solid	28x17.8x1.0
36T5-16-2	16	6F	Alu.	25.6	24.6	32	18	30	36	solid	32x20x1.0
36T5-18-2	18	6F	Alu.	28.8	27.8	32	20	30	36	solid	32x23x1.0
36T5-19-2	19	6F	Alu.	30.4	29.4	36	20	30	36	solid	36x25x1.0
36T5-20-2	20	6F	Alu.	32	31	36	22	30	36	solid	36x25x1.0
36T5-22-2	22	6F	Alu.	32.15	34.15	38	23	30	36	solid	38x26.5x1.0
36T5-24-2	24	6F	Alu.	38.4	37.4	42	24	30	36	solid	42x30.5x1.0
36T5-25-2	25	6F	Alu.	39.95	38.95	44	26	30	36	solid	44x32.5x1.0
36T5-26-2	26	6F	Alu.	41.6	40.6	44	26	30	36	solid	44x32.5x1.0
36T5-27-2	27	6F	Alu.	43.2	42.2	48	30	30	36	8	48x37x1.0
36T5-28-2	28	6F	Alu.	44.75	43.75	48	32	30	36	8	48x37x1.0
36T5-30-2	30	6F	Alu.	47.95	46.95	51	34	30	36	8	51x40x1.0
36T5-32-2	32	6F	Alu.	51.1	50.1	54	38	30	36	8	54x43x1.0
36T5-36-2	36	6F	Alu.	57.45	56.45	64	38	30	36	8	64x47x1.0
36T5-40-2	40	6F	Alu.	63.85	62.85	66.5	40	30	36	8	66.5x52x1.0
36T5-42-2	42	6F	Alu.	67	66	70	40	30	36	8	70x53x1.0
36T5-44-0	44	6	Alu.	70.2	69.2	-	45	30	36	8	-
36T5-48-0	48	6	Alu.	76.55	75.55	-	50	30	36	8	-
36T5-60-0	60	6	Alu.	95.65	94.65	-	65	30	36	8	-


Notes:

Setscrew hole are available upon request
Flange dimension O.D.x I.D. x thickness

Timing Pulleys -- 31T10 (For Belt - 10mm Pitch x 16mm Wide)

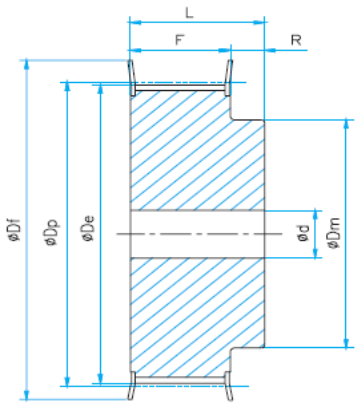

6F

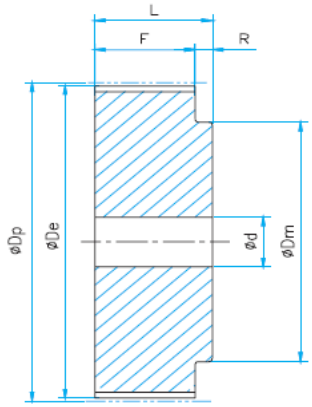


6

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
31T10-12-2	12	6F	Alu.	38.35	36.35	42	28	21	31	6	42x30.5x1.0
31T10-14-2	14	6F	Alu.	44.7	42.7	48	32	21	31	8	48x37x1.0
31T10-15-2	15	6F	Alu.	47.9	45.9	51	32	21	31	8	51x40x1.0
31T10-16-2	16	6F	Alu.	51.1	49.1	54	35	21	31	8	54x43x1.0
31T10-18-2	18	6F	Alu.	57.45	55.45	60	40	21	31	8	60x47x1.0
31T10-19-2	19	6F	Alu.	60.65	58.65	66	44	21	31	8	66.5x52x1.0
31T10-20-2	20	6F	Alu.	63.8	61.8	66	46	21	31	8	66.5x52x1.0
31T10-22-2	22	6F	Alu.	70.2	68.2	75	52	21	31	8	75x60x1.0
31T10-24-2	24	6F	Alu.	76.55	74.55	83	58	21	31	8	83x68x1.0
31T10-25-2	25	6F	Alu.	79.75	77.7	83	60	21	31	8	83x68x1.0
31T10-26-2	26	6F	Alu.	82.9	80.9	87	60	21	31	8	87x72x1.0
31T10-27-2	27	6F	Alu.	86.1	84.1	91	60	21	31	8	91x76x1.0
31T10-28-2	28	6F	Alu.	89.25	87.25	93	60	21	31	8	93x80x1.0
31T10-30-2	30	6F	Alu.	95.65	93.65	97	60	21	31	8	97x83x1.0
31T10-32-2	32	6F	Alu.	102	100	106	65	21	31	10	106x90x1.0
31T10-36-2	36	6F	Alu.	114.75	112.75	119	70	21	31	10	119x103x1.0
31T10-40-2	40	6F	Alu.	127.45	125.45	131	80	21	31	10	131x115x1.0
31T10-44-0	44	6	Alu.	140.2	138.2	-	88	21	31	10	-
31T10-48-0	48	6	Alu.	152.95	150.95	-	95	21	31	16	-
31T10-60-0	60	6	Alu.	191.1	189.1	-	110	21	31	16	-


Notes:

Setscrew hole are available upon request
Flange dimension O.D.x I.D. x thickness

Timing Pulleys -- 40T10 (For Belt - 10mm Pitch x 25mm Wide)

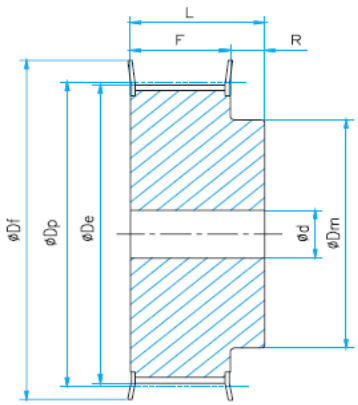

6F

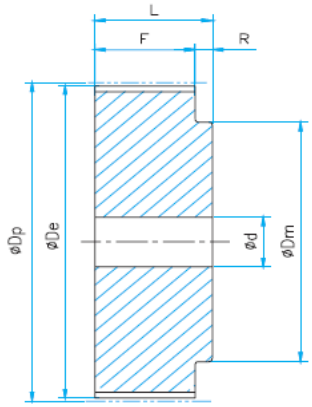


6

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
40T10-12-2	12	6F	Alu.	38.35	36.35	42	28	30	40	6	42x30.5x1.0
40T10-14-2	14	6F	Alu.	44.7	42.7	48	32	30	40	8	48x37x1.0
40T10-15-2	15	6F	Alu.	47.9	45.9	51	32	30	40	8	51x40x1.0
40T10-16-2	16	6F	Alu.	51.1	49.1	54	35	30	40	8	54x43x1.0
40T10-18-2	18	6F	Alu.	57.45	55.45	60	40	30	40	8	60x47x1.0
40T10-19-2	19	6F	Alu.	60.65	58.65	66	44	30	40	8	66.5x52x1.0
40T10-20-2	20	6F	Alu.	63.8	61.8	66	46	30	40	8	66.5x52x1.0
40T10-22-2	22	6F	Alu.	70.2	68.2	75	52	30	40	8	75x60x1.0
40T10-24-2	24	6F	Alu.	76.55	74.55	83	58	30	40	8	83x68x1.0
40T10-25-2	25	6F	Alu.	79.75	77.7	83	60	30	40	8	83x68x1.0
40T10-26-2	26	6F	Alu.	82.9	80.9	87	60	30	40	8	87x72x1.0
40T10-27-2	27	6F	Alu.	86.1	84.1	91	60	30	40	8	91x76x1.0
40T10-28-2	28	6F	Alu.	89.25	87.25	93	60	30	40	8	93x80x1.0
40T10-30-2	30	6F	Alu.	95.65	93.65	97	60	30	40	8	97x83x1.0
40T10-32-2	32	6F	Alu.	102	100	106	65	30	40	10	106x90x1.0
40T10-36-2	36	6F	Alu.	114.75	112.75	119	70	30	40	10	119x103x1.0
40T10-40-2	40	6F	Alu.	127.45	125.45	131	80	30	40	10	131x115x1.0
40T10-44-0	44	6	Alu.	140.2	138.2	-	88	30	40	10	-
40T10-48-0	48	6	Alu.	152.95	150.95	-	95	30	40	16	-
40T10-60-0	60	6	Alu.	191.1	189.1	-	110	30	40	16	-


Notes:

Setscrew hole are available upon request
Flange dimension O.D.x I.D. x thickness

Timing Pulleys --47T10 (For Belt - 10mm Pitch x 32mm Wide)

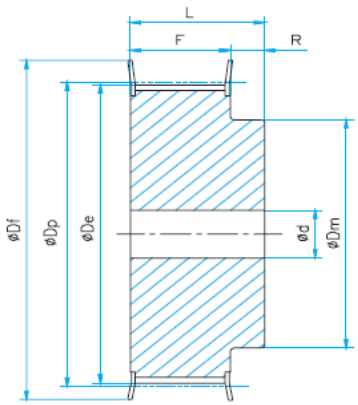

6F

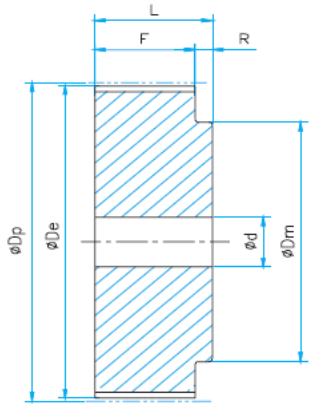


6

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
47T10-18-2	18	6F	Alu.	57.45	55.45	60	40	37	47	10	60x47x1.0
47T10-19-2	19	6F	Alu.	60.65	58.65	66	44	37	47	10	66.5x52x1.0
47T10-20-2	20	6F	Alu.	63.8	61.8	66	46	37	47	12	66.5x52x1.0
47T10-22-2	22	6F	Alu.	70.2	68.2	75	52	37	47	12	75x60x1.0
47T10-24-2	24	6F	Alu.	76.55	74.55	83	58	37	47	12	83x68x1.0
47T10-25-2	25	6F	Alu.	79.75	77.7	83	60	37	47	12	83x68x1.0
47T10-26-2	26	6F	Alu.	82.9	80.9	87	60	37	47	12	87x72x1.0
47T10-27-2	27	6F	Alu.	86.1	84.1	91	60	37	47	12	91x76x1.0
47T10-28-2	28	6F	Alu.	89.25	87.25	93	60	37	47	12	93x80x1.0
47T10-30-2	30	6F	Alu.	95.65	93.65	97	60	37	47	12	97x83x1.0
47T10-32-2	32	6F	Alu.	102	100	106	65	37	47	12	106x90x1.0
47T10-36-2	36	6F	Alu.	114.75	112.75	119	70	37	47	16	119x103x1.0
47T10-40-2	40	6F	Alu.	127.45	125.45	131	80	37	47	16	131x115x1.0
47T10-44-0	44	6	Alu.	140.2	138.2	-	88	37	47	16	-
47T10-48-0	48	6	Alu.	152.95	150.95	-	95	37	47	16	-
47T10-60-0	60	6	Alu.	191.1	189.1	-	110	37	47	16	-

Notes:

Setscrew hole are available upon request
Flange dimension O.D.x I.D. x thickness

Timing Pulleys --66T10 (For Belt - 10mm Pitch x 50mm Wide)

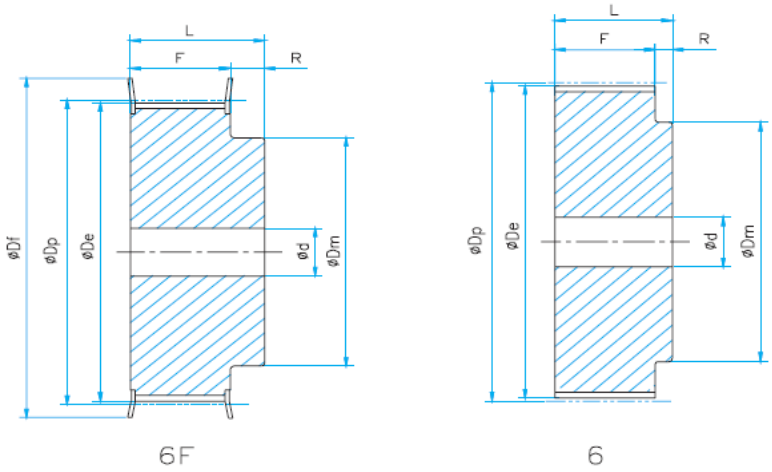


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
66T10-18-2	18	6F	Alu.	57.45	55.45	60	40	56	66	10	60x47x1.0
66T10-19-2	19	6F	Alu.	60.65	58.65	66	44	56	66	10	66.5x52x1.0
66T10-20-2	20	6F	Alu.	63.8	61.8	66	46	56	66	12	66.5x52x1.0
66T10-22-2	22	6F	Alu.	70.2	68.2	75	52	56	66	12	75x60x1.0
66T10-24-2	24	6F	Alu.	76.55	74.55	83	58	56	66	12	83x68x1.0
66T10-25-2	25	6F	Alu.	79.75	77.7	83	60	56	66	12	83x68x1.0
66T10-26-2	26	6F	Alu.	82.9	80.9	87	60	56	66	12	87x72x1.0
66T10-27-2	27	6F	Alu.	86.1	84.1	91	60	56	66	12	91x76x1.0
66T10-28-2	28	6F	Alu.	89.25	87.25	93	60	56	66	12	93x80x1.0
66T10-30-2	30	6F	Alu.	95.65	93.65	97	60	56	66	12	97x83x1.0
66T10-32-2	32	6F	Alu.	102	100	106	65	56	66	12	106x90x1.0
66T10-36-2	36	6F	Alu.	114.75	112.75	119	70	56	66	16	119x103x1.0
66T10-40-2	40	6F	Alu.	127.45	125.45	131	80	56	66	16	131x115x1.0
66T10-44-0	44	6	Alu.	140.2	138.2	-	88	56	66	16	-
66T10-48-0	48	6	Alu.	152.95	150.95	-	95	56	66	16	-
66T10-60-0	60	6	Alu.	191.1	189.1	-	110	56	66	16	-


Notes:

Setscrew hole are available upon request
Flange dimension O.D.x I.D. x thickness

Timing Belt Pulleys -- 21AT5 (For Belt - 5mm Pitch x 10mm Wide)

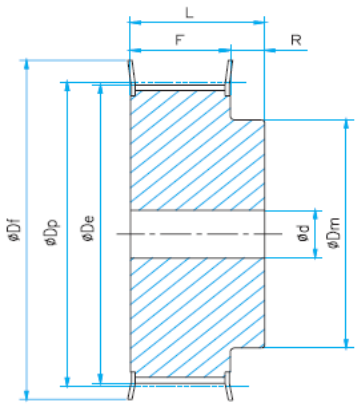

6F

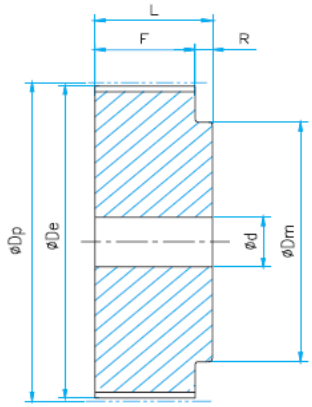


6

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
21AT5-12-2	12	6F	Alu.	19.25	17.85	23	11	15	21	solid	23x12.5x1.0
21AT5-14-2	14	6F	Alu.	22.45	21.05	25	14	15	21	solid	25x15x1.0
21AT5-15-2	15	6F	Alu.	24.05	22.65	28	16	15	21	solid	28x17.8x1.0
21AT5-16-2	16	6F	Alu.	25.6	24.2	32	18	15	21	solid	32x20x1.0
21AT5-18-2	18	6F	Alu.	28.8	27.4	32	20	15	21	solid	32x23x1.0
21AT5-19-2	19	6F	Alu.	30.4	29	36	22	15	21	solid	36x25x1.0
21AT5-20-2	20	6F	Alu.	32	30.6	36	23	15	21	solid	36x25x1.0
21AT5-22-2	22	6F	Alu.	35.25	33.85	38	24	15	21	solid	38x26.5x1.0
21AT5-24-2	24	6F	Alu.	38.4	37	42	26	15	21	solid	42x30.5x1.0
21AT5-25-2	25	6F	Alu.	39.95	38.6	44	26	15	21	solid	44x32.5x1.0
21AT5-26-2	26	6F	Alu.	41.6	40.2	44	26	15	21	solid	44x32.5x1.0
21AT5-27-2	27	6F	Alu.	43.2	41.8	48	30	15	21	8	48x37x1.0
21AT5-28-2	28	6F	Alu.	44.75	43.35	48	32	15	21	8	48x37x1.0
21AT5-30-2	30	6F	Alu.	47.95	46.55	51	34	15	21	8	51x40x1.0
21AT5-32-2	32	6F	Alu.	51.1	49.7	54	38	15	21	8	54x43x1.0
21AT5-36-2	36	6F	Alu.	57.45	56.05	64	38	15	21	8	64x47x1.0
21AT5-40-2	40	6F	Alu.	63.85	62.45	66.5	40	15	21	8	66.5x52x1.0
21AT5-42-2	42	6F	Alu.	67	65.6	70	40	15	21	8	70x53x1.0
21AT5-44-0	44	6	Alu.	70.2	68.8	-	45	15	21	8	-
21AT5-48-0	48	6	Alu.	76.55	75.15	-	50	15	21	8	-
21AT5-60-0	60	6	Alu.	95.65	94.25	-	65	15	21	8	-


Notes:

Setscrew hole are available upon request
Flange dimension O.D.x I.D. x thickness

Timing Belt Pulleys -- 27AT5 (For Belt - 5mm Pitch x 16mm Wide)

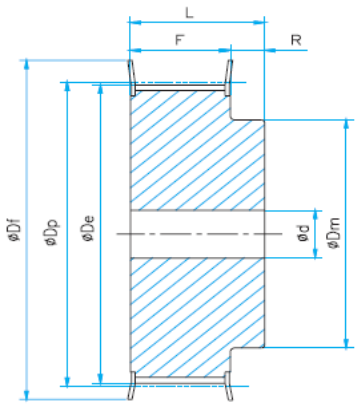

6F

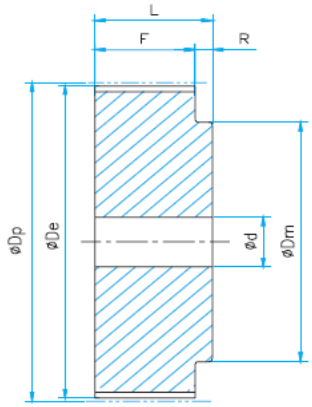


6

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
27AT5-12-2	12	6F	Alu.	19.25	17.85	23	11	21	27	solid	23x12.5x1.0
27AT5-14-2	14	6F	Alu.	22.45	21.05	25	14	21	27	solid	25x15x1.0
27AT5-15-2	15	6F	Alu.	24.05	22.65	28	16	21	27	solid	28x17.8x1.0
27AT5-16-2	16	6F	Alu.	25.6	24.2	32	18	21	27	solid	32x20x1.0
27AT5-18-2	18	6F	Alu.	28.8	27.4	32	20	21	27	solid	32x23x1.0
27AT5-19-2	19	6F	Alu.	30.4	29	36	22	21	27	solid	36x25x1.0
27AT5-20-2	20	6F	Alu.	32	30.6	36	23	21	27	solid	36x25x1.0
27AT5-22-2	22	6F	Alu.	35.25	33.85	38	24	21	27	solid	38x26.5x1.0
21AT5-24-2	24	6F	Alu.	38.4	37	42	26	21	27	solid	42x30.5x1.0
27AT5-25-2	25	6F	Alu.	39.95	38.6	44	26	21	27	solid	44x32.5x1.0
27AT5-26-2	26	6F	Alu.	41.6	40.2	44	26	21	27	solid	44x32.5x1.0
27AT5-27-2	27	6F	Alu.	43.2	41.8	48	30	21	27	8	48x37x1.0
27AT5-28-2	28	6F	Alu.	44.75	43.35	48	32	21	27	8	48x37x1.0
27AT5-30-2	30	6F	Alu.	47.95	46.55	51	34	21	27	8	51x40x1.0
27AT5-32-2	32	6F	Alu.	51.1	49.7	54	38	21	27	8	54x43x1.0
27AT5-36-2	36	6F	Alu.	57.45	56.05	64	38	21	27	8	64x47x1.0
27AT5-40-2	40	6F	Alu.	63.85	62.45	66.5	40	21	27	8	66.5x52x1.0
27AT5-42-2	42	6F	Alu.	67	65.6	70	40	21	27	8	70x53x1.0
27AT5-44-0	44	6	Alu.	70.2	68.8	-	45	21	27	8	-
27AT5-48-0	48	6	Alu.	76.55	75.15	-	50	21	27	8	-
27AT5-60-0	60	6	Alu.	95.65	94.25	-	65	21	27	8	-


Notes:

Setscrew hole are available upon request
Flange dimension O.D.x I.D. x thickness

Timing Belt Pulleys -- 36AT5 (For Belt - 5mm Pitch x 25mm Wide)

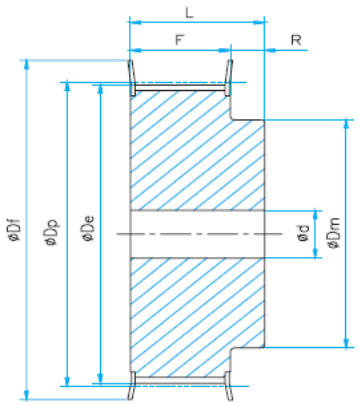

6F

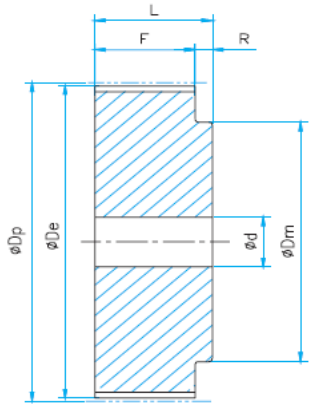


6

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
36AT5-12-2	12	6F	Alu.	19.25	17.85	23	11	30	36	solid	23x12.5x1.0
36AT5-14-2	14	6F	Alu.	22.45	21.05	25	14	30	36	solid	25x15x1.0
36AT5-15-2	15	6F	Alu.	24.05	22.65	28	16	30	36	solid	28x17.8x1.0
36AT5-16-2	16	6F	Alu.	25.6	24.2	32	18	30	36	solid	32x20x1.0
36AT5-18-2	18	6F	Alu.	28.8	27.4	32	20	30	36	solid	32x23x1.0
36AT5-19-2	19	6F	Alu.	30.4	29	36	22	30	36	solid	36x25x1.0
36AT5-20-2	20	6F	Alu.	32	30.6	36	23	30	36	solid	36x25x1.0
36AT5-22-2	22	6F	Alu.	35.25	33.85	38	24	30	36	solid	38x26.5x1.0
36AT5-24-2	24	6F	Alu.	38.4	37	42	26	30	36	solid	42x30.5x1.0
36AT5-25-2	25	6F	Alu.	39.95	38.6	44	26	30	36	solid	44x32.5x1.0
36AT5-26-2	26	6F	Alu.	41.6	40.2	44	26	30	36	solid	44x32.5x1.0
36AT5-27-2	27	6F	Alu.	43.2	41.8	48	30	30	36	8	48x37x1.0
36AT5-28-2	28	6F	Alu.	44.75	43.35	48	32	30	36	8	48x37x1.0
36AT5-30-2	30	6F	Alu.	47.95	46.55	51	34	30	36	8	51x40x1.0
36AT5-32-2	32	6F	Alu.	51.1	49.7	54	38	30	36	8	54x43x1.0
36AT5-36-2	36	6F	Alu.	57.45	56.05	64	38	30	36	8	64x47x1.0
36AT5-40-2	40	6F	Alu.	63.85	62.45	66.5	40	30	36	8	66.5x52x1.0
36AT5-42-2	42	6F	Alu.	67	65.6	70	40	30	36	8	70x53x1.0
36AT5-44-0	44	6	Alu.	70.2	68.8	-	45	30	36	8	-
36AT5-48-0	48	6	Alu.	76.55	75.15	-	50	30	36	8	-
36AT5-60-0	60	6	Alu.	95.65	94.25	-	65	30	36	8	-


Notes:

Setscrew hole are available upon request
Flange dimension O.D.x I.D. x thickness

Timing Belt Pulleys --31 AT10 (For Belt - 10mm Pitch x 16mm Wide)

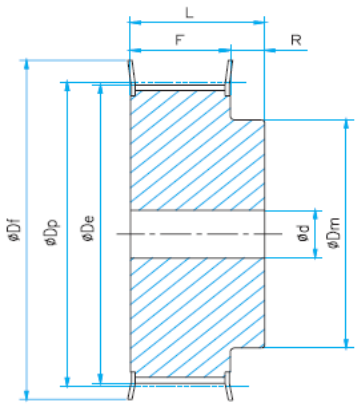

6F

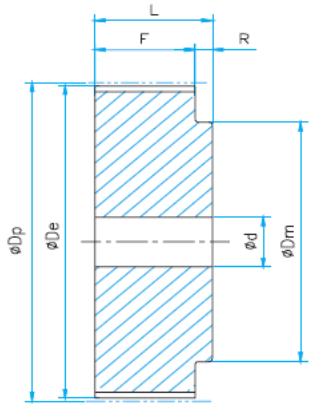


6

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
31AT10-15-2	15	6F	Alu.	47.9	45.9	51	32	21	31	8	51x40x1.0
31AT10-16-2	16	6F	Alu.	51.05	49.05	54	35	21	31	8	54x43x1.0
31AT10-18-2	18	6F	Alu.	57.45	55.45	60	40	21	31	8	60x47x1.0
31AT10-19-2	19	6F	Alu.	60.6	58.6	66	44	21	31	8	66.5x52x1.0
31AT10-20-2	20	6F	Alu.	63.8	61.8	66	46	21	31	8	66.5x52x1.0
31AT10-22-2	22	6F	Alu.	70.15	68.15	75	52	21	31	8	75x60x1.0
31AT10-24-2	24	6F	Alu.	76.55	74.55	83	58	21	31	8	83x68x1.0
31AT10-25-2	25	6F	Alu.	79.7	77.7	83	60	21	31	8	83x68x1.0
31AT10-26-2	26	6F	Alu.	82.9	80.9	87	60	21	31	8	87x72x1.0
31AT10-27-2	27	6F	Alu.	86.1	84.1	91	60	21	31	8	91x76x1.0
31AT10-28-2	28	6F	Alu.	89.25	87.25	93	60	21	31	8	93x80x1.0
31AT10-30-2	30	6F	Alu.	95.65	93.65	97	60	21	31	8	97x83x1.0
31AT10-32-2	32	6F	Alu.	102	100	106	65	21	31	10	106x90x1.0
31AT10-36-2	36	6F	Alu.	114.75	112.75	119	70	21	31	10	119x103x1.0
31AT10-40-2	40	6F	Alu.	127.45	125.45	131	80	21	31	10	131x115x1.0
31AT10-44-0	44	6	Alu.	140.2	138.2	-	88	21	31	10	-
31AT10-48-0	48	6	Alu.	152.95	150.95	-	95	21	31	16	-
31AT10-60-0	60	6	Alu.	191.1	189.1	-	110	21	31	16	-


Notes:

Setscrew hole are available upon request
Flange dimension O.D.x I.D. x thickness

Timing Belt Pulleys -- 40AT10 (For Belt - 10mm Pitch x 25mm Wide)

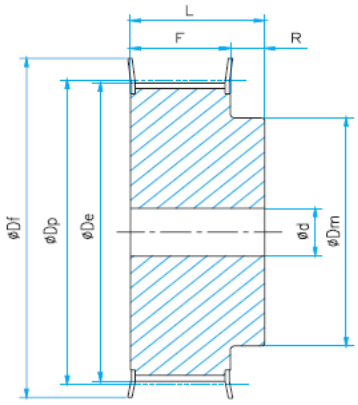

6F

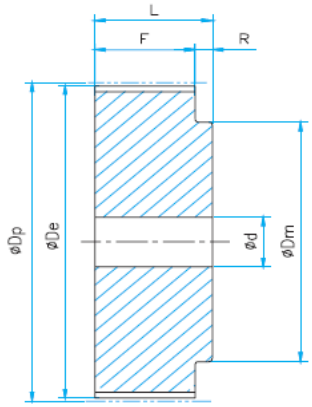


6

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
40AT10-15-2	15	6F	Alu.	47.9	45.9	51	32	30	40	8	51x40x1.0
40AT10-16-2	16	6F	Alu.	51.05	49.05	54	35	30	40	8	54x43x1.0
40AT10-18-2	18	6F	Alu.	57.45	55.45	60	40	30	40	8	60x47x1.0
40AT10-19-2	19	6F	Alu.	60.6	58.6	66	44	30	40	8	66.5x52x1.0
40AT10-20-2	20	6F	Alu.	63.8	61.8	66	46	30	40	8	66.5x52x1.0
40AT10-22-2	22	6F	Alu.	70.15	68.15	75	52	30	40	8	75x60x1.0
40AT10-24-2	24	6F	Alu.	76.55	74.55	83	58	30	40	8	83x68x1.0
40AT10-25-2	25	6F	Alu.	79.7	77.7	83	60	30	40	8	83x68x1.0
40AT10-26-2	26	6F	Alu.	82.9	80.9	87	60	30	40	8	87x72x1.0
40AT10-27-2	27	6F	Alu.	86.1	84.1	91	60	30	40	8	91x76x1.0
40AT10-28-2	28	6F	Alu.	89.25	87.25	93	60	30	40	8	93x80x1.0
40AT10-30-2	30	6F	Alu.	95.65	93.65	97	60	30	40	8	97x83x1.0
40AT10-32-2	32	6F	Alu.	102	100	106	65	30	40	10	106x90x1.0
40AT10-36-2	36	6F	Alu.	114.75	112.75	119	70	30	40	10	119x103x1.0
40AT10-40-2	40	6F	Alu.	127.45	125.45	131	80	30	40	10	131x115x1.0
40AT10-44-0	44	6	Alu.	140.2	138.2	-	88	30	40	10	-
40AT10-48-0	48	6	Alu.	152.95	150.95	-	95	30	40	16	-
40AT10-60-0	60	6	Alu.	191.1	189.1	-	110	30	40	16	-


Notes:

Setscrew hole are available upon request
Flange dimension O.D.x I.D. x thickness

Timing Belt Pulleys --47AT10 (For Belt - 10mm Pitch x 32mm Wide)

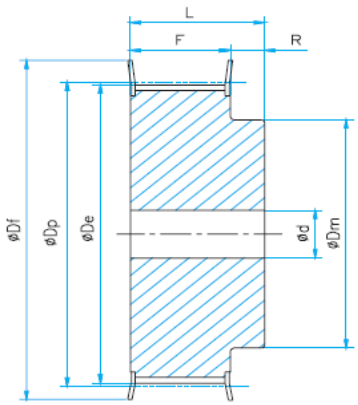

6F

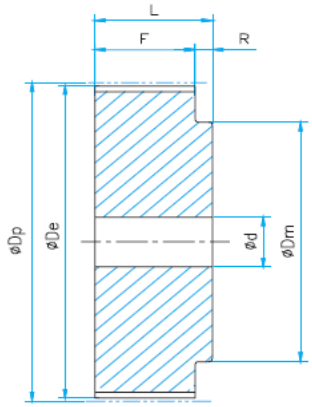


6

Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
47AT10-18-2	18	6F	Alu.	57.45	55.45	60	40	37	47	10	60x47x1.0
47AT10-19-2	19	6F	Alu.	60.6	58.6	66	44	37	47	10	66.5x52x1.0
47AT10-20-2	20	6F	Alu.	63.8	61.8	66	46	37	47	12	66.5x52x1.0
47AT10-22-2	22	6F	Alu.	70.15	68.15	75	52	37	47	12	75x60x1.0
47AT10-24-2	24	6F	Alu.	76.55	74.55	83	58	37	47	12	83x68x1.0
47AT10-25-2	25	6F	Alu.	79.7	77.7	83	60	37	47	12	83x68x1.0
47AT10-26-2	26	6F	Alu.	82.9	80.9	87	60	37	47	12	87x72x1.0
47AT10-27-2	27	6F	Alu.	86.1	84.1	91	60	37	47	12	91x76x1.0
47AT10-28-2	28	6F	Alu.	89.25	87.25	93	60	37	47	12	93x80x1.0
47AT10-30-2	30	6F	Alu.	95.65	93.65	97	60	37	47	12	97x83x1.0
47AT10-32-2	32	6F	Alu.	102	100	106	65	37	47	12	106x90x1.0
47AT10-36-2	36	6F	Alu.	114.75	112.75	119	70	37	47	16	119x103x1.0
47AT10-40-2	40	6F	Alu.	127.45	125.45	131	80	37	47	16	131x115x1.0
47AT10-44-0	44	6	Alu.	140.2	138.2	-	88	37	47	16	-
47AT10-48-0	48	6	Alu.	152.95	150.95	-	95	37	47	16	-
47AT10-60-0	60	6	Alu.	191.1	189.1	-	110	37	47	16	-

Notes:

Setscrew hole are available upon request
Flange dimension O.D.x I.D. x thickness

Timing Belt Pulleys --66AT10 (For Belt - 10mm Pitch x 50mm Wide)

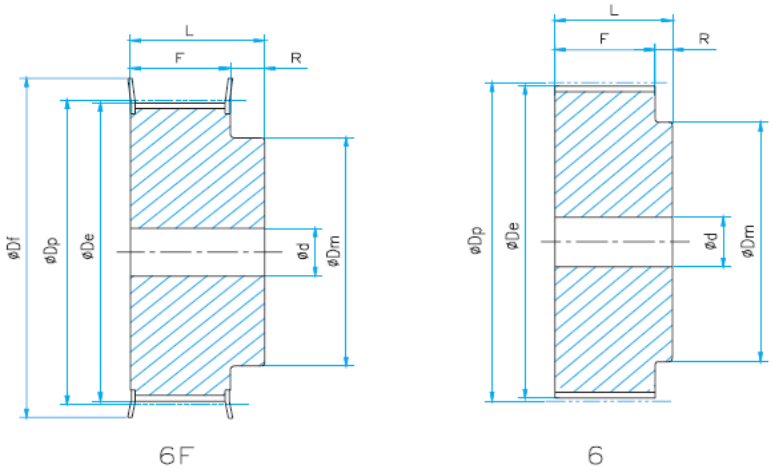


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
66AT10-18-2	18	6F	Alu.	57.45	55.45	60	40	56	66	10	60x47x1.0
66AT10-19-2	19	6F	Alu.	60.6	58.6	66	44	56	66	10	66.5x52x1.0
66AT10-20-2	20	6F	Alu.	63.8	61.8	66	46	56	66	12	66.5x52x1.0
66AT10-22-2	22	6F	Alu.	70.15	68.15	75	52	56	66	12	75x60x1.0
66AT10-24-2	24	6F	Alu.	76.55	74.55	83	58	56	66	12	83x68x1.0
66AT10-25-2	25	6F	Alu.	79.7	77.7	83	60	56	66	12	83x68x1.0
66AT10-26-2	26	6F	Alu.	82.9	80.9	87	60	56	66	12	87x72x1.0
66AT10-27-2	27	6F	Alu.	86.1	84.1	91	60	56	66	12	91x76x1.0
66AT10-28-2	28	6F	Alu.	89.25	87.25	93	60	56	66	12	93x80x1.0
66AT10-30-2	30	6F	Alu.	95.65	93.65	97	60	56	66	12	97x83x1.0
66AT10-32-2	32	6F	Alu.	102	100	106	65	56	66	12	106x90x1.0
66AT10-36-2	36	6F	Alu.	114.75	112.75	119	70	56	66	16	119x103x1.0
66AT10-40-2	40	6F	Alu.	127.45	125.45	131	80	56	66	16	131x115x1.0
66AT10-44-0	44	6	Alu.	140.2	138.2	-	88	56	66	16	-
66AT10-48-0	48	6	Alu.	152.95	150.95	-	95	56	66	16	-
66AT10-60-0	60	6	Alu.	191.1	189.1	-	110	56	66	16	-

Notes:

Setscrew hole are available upon request
Flange dimension O.D.x I.D. x thickness

Timing Belt Pulleys -- 3M-06 Pilot Bore & Solid

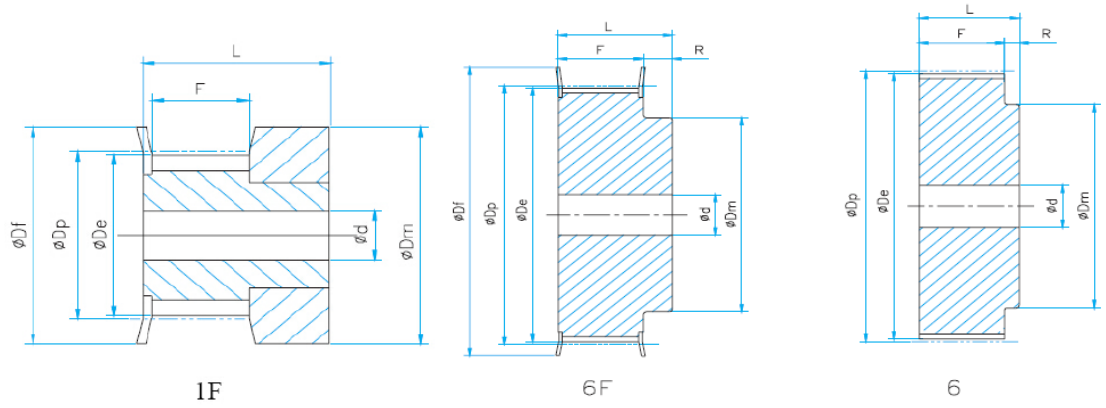

1F 6F 6


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
10-3M-06	10	1F	Alu.	9.55	8.79	13	13	7.2	14.5	solid	13.0x6.0x0.5
12-3M-06	12	1F	Alu.	11.46	10.7	15	15	7.2	14.5	solid	15.0x8.0x0.5
14-3M-06	14	1F	Alu.	13.37	12.61	16	16	7.2	14.5	solid	16.0x9.5x0.5
15-3M-06	15	1F	Alu.	14.32	13.56	17.5	17.5	7.2	14.5	solid	17.5x10.5x0.5
16-3M-06	16	6F	Alu.	15.28	14.52	17.5	10	9.8	17.5	solid	17.5x11.6x0.5
18-3M-06	18	6F	Alu.	17.19	16.43	20	11	9.8	17.5	solid	20.0x12.2x0.5
20-3M-06	20	6F	Alu.	19.1	18.34	23	13	9.8	17.5	solid	23.0x14.0x0.5
21-3M-06	21	6F	Alu.	20.05	19.29	25	13	9.8	17.5	solid	25.0x15.0x0.5
22-3M-06	22	6F	Alu.	21.01	20.25	25	13	9.8	17.5	solid	25.0x15.0x0.5
24-3M-06	24	6F	Alu.	22.92	22.16	25	13	9.8	17.5	solid	25.0x15.0x0.5
26-3M-06	26	6F	Alu.	24.83	24.07	28	16	9.8	17.5	solid	28.0x20.0x0.5
28-3M-06	28	6F	Alu.	26.74	25.98	32	18	9.8	17.5	solid	32.0x23.0x0.5
30-3M-06	30	6F	Alu.	28.65	27.89	32	20	9.8	17.5	solid	32.0x23.0x0.5
32-3M-06	32	6F	Alu.	30.56	29.8	36	22	9.8	17.5	solid	36.0x25.0x0.5
36-3M-06	36	6F	Alu.	34.38	33.62	39	26	10.3	18	solid	39.0x28.0x0.5
40-3M-06	40	6F	Alu.	38.2	37.44	42	28	10.3	18	solid	42.0x30.5x0.5
44-3M-06	44	6F	Alu.	42.02	41.26	48	33	10.3	18	solid	48.0x37.0x0.5
48-3M-06	48	6	Alu.	45.84	45.08	-	33	10.3	18.6	8	-
60-3M-06	60	6	Alu.	57.3	56.54	-	33	10.3	18.6	8	-
72-3M-06	72	6	Alu.	68.75	67.99	-	33	10.3	18.6	8	-

Notes:

Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Timing Belt Pulleys -- 3M-09 Pilot Bore & Solid

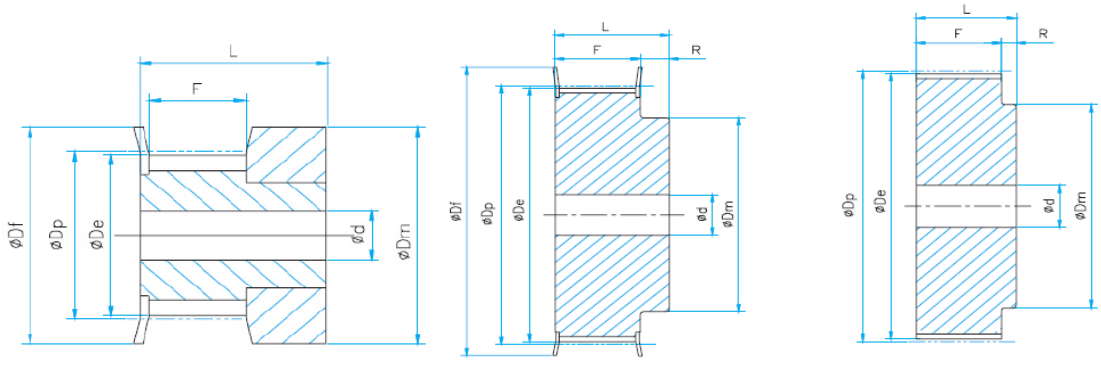

1F 6F 6


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
10-3M-09	10	1F	Alu.	9.55	8.79	13	13	10.2	17.5	solid	13.0x6.0x0.5
12-3M-09	12	1F	Alu.	11.46	10.7	15	15	10.2	17.5	solid	15.0x8.0x0.5
14-3M-09	14	1F	Alu.	13.37	12.61	16	16	10.2	17.5	solid	16.0x9.5x0.5
15-3M-09	15	1F	Alu.	14.32	13.56	17.5	17.5	10.2	17.5	solid	17.5x10.5x0.5
16-3M-09	16	6F	Alu.	15.28	14.52	17.5	10	12.8	20.6	solid	17.5x11.6x0.5
18-3M-09	18	6F	Alu.	17.19	16.43	20	10.6	12.8	20.6	solid	20.0x12.2x0.5
20-3M-09	20	6F	Alu.	19.1	18.34	23	12.4	12.8	20.6	solid	23.0x14.0x0.5
21-3M-09	21	6F	Alu.	20.05	19.29	25	13	12.8	20.6	solid	25.0x15.0x0.5
22-3M-09	22	6F	Alu.	21.01	20.25	25	13	12.8	20.6	solid	25.0x15.0x0.5
24-3M-09	24	6F	Alu.	22.92	22.16	25	13	12.8	20.6	solid	25.0x15.0x0.5
26-3M-09	26	6F	Alu.	24.83	24.07	28	16	12.8	20.6	solid	28.0x20.0x0.5
28-3M-09	28	6F	Alu.	26.74	25.98	32	18	12.8	20.6	solid	32.0x23.0x0.5
30-3M-09	30	6F	Alu.	28.65	27.89	32	20	12.8	20.6	solid	32.0x23.0x0.5
32-3M-09	32	6F	Alu.	30.56	29.8	36	22	12.8	20.6	solid	36.0x25.0x0.5
36-3M-09	36	6F	Alu.	34.38	33.62	39	26	13.4	22.2	solid	39.0x28.0x0.5
40-3M-09	40	6F	Alu.	38.2	37.44	42	28	13.4	22.2	solid	42.0x30.5x0.5
44-3M-09	44	6F	Alu.	42.02	41.26	48	33	13.4	22.2	solid	48.0x37.0x0.5
48-3M-09	48	6	Alu.	45.84	45.08	-	33	13.4	22.2	8	-
60-3M-09	60	6	Alu.	57.3	56.54	-	33	13.4	22.2	8	-
72-3M-09	72	6	Alu.	68.75	67.99	-	33	13.4	22.2	8	-

Notes:

Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Timing Belt Pulleys -- 3M-15 Pilot Bore & Solid

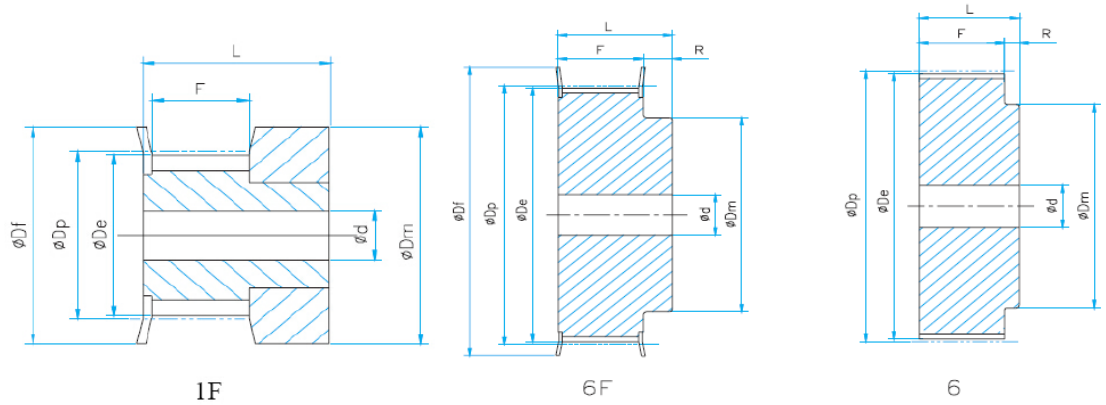

1F 6F 6


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Width **F**	Length **L**	Bore **d**	Flange Dimension
10-3M-15	10	1F	Alu.	9.55	8.79	13	13	17	26	Solid	13.0x6.0x0.5
12-3M-15	12	1F	Alu.	11.46	10.7	15	15	17	26	Solid	15.0x8.0x0.5
14-3M-15	14	1F	Alu.	13.37	12.61	16	16	17	26	Solid	16.0x9.5x0.5
15-3M-15	15	1F	Alu.	14.32	13.56	17.5	17.5	17	26	Solid	17.5x10.5x0.5
16-3M-15	16	6F	Alu.	15.28	14.52	17.5	10	19.5	26	Solid	17.5x11.6x0.5
18-3M-15	18	6F	Alu.	17.19	16.43	20	10.6	19.5	26	Solid	20.0x12.2x0.5
20-3M-15	20	6F	Alu.	19.1	18.34	23	12.4	19.5	26	Solid	23.0x14.0x0.5
21-3M-15	21	6F	Alu.	20.05	19.29	25	13	19.5	26	Solid	25.0x15.0x0.5
22-3M-15	22	6F	Alu.	21.01	20.25	25	13	19.5	26	Solid	25.0x15.0x0.5
24-3M-15	24	6F	Alu.	22.92	22.16	25	13	19.5	26	Solid	25.0x15.0x0.5
26-3M-15	26	6F	Alu.	24.83	24.07	28	16	19.5	26	Solid	28.0x20.0x0.5
28-3M-15	28	6F	Alu.	26.74	25.98	32	18	19.5	26	Solid	32.0x23.0x0.5
30-3M-15	30	6F	Alu.	28.65	27.89	32	20	19.5	26	Solid	32.0x23.0x0.5
32-3M-15	32	6F	Alu.	30.56	29.8	36	22	19.5	26	Solid	36.0x25.0x0.5
36-3M-15	36	6F	Alu.	34.38	33.62	39	26	20	30	Solid	39.0x28.0x0.5
40-3M-15	40	6F	Alu.	38.2	37.44	42	28	20	30	Solid	42.0x30.5x0.5
44-3M-15	44	6F	Alu.	42.02	41.26	48	33	20	30	Solid	48.0x37.0x0.5
48-3M-15	48	6	Alu.	45.84	45.08	-	33	20	30	8	-
60-3M-15	60	6	Alu.	57.3	56.54	-	33	20	30	8	-
72-3M-15	72	6	Alu.	68.75	67.99	-	33	20	30	8	-

Notes:


Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Timing Belt Pulleys -- 5M-09 Pilot Bore & Solid

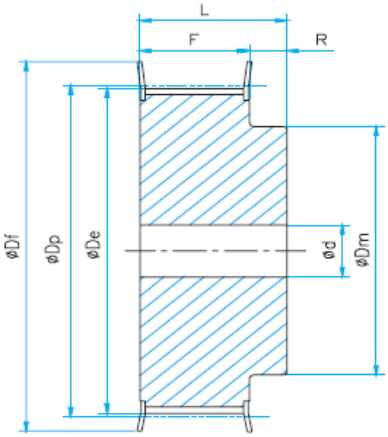

6F

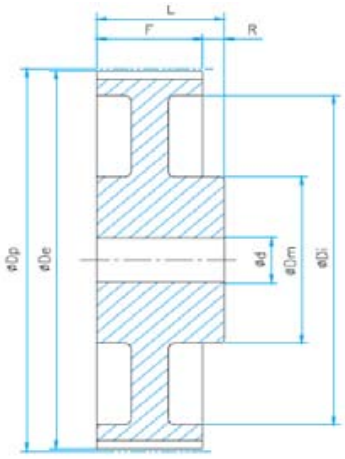

6W


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Di	Width **F**	Length **L**	Bore **d**	Flange Dimension
12-5M-09	12	6F	St.	19.1	17.96	23	12	-	14.5	20	Solid	23.0x14.0x1.0
14-5M-09	14	6F	St.	22.28	21.14	25	13	-	14.5	20	Solid	25.0x15.0x1.0
15-5M-09	15	6F	St.	23.87	22.73	28	16	-	14.5	20	Solid	28.0x17.8x1.0
16-5M-09	16	6F	St.	25.46	24.32	28	16.2	-	14.5	20	Solid	28.0x17.8x1.0
18-5M-09	18	6F	St.	28.65	27.51	32	20	-	14.5	20	Solid	32.0x23.0x1.0
20-5M-09	20	6F	St.	31.83	30.69	36	23	-	14.5	22.5	Solid	36.0x25.0x1.0
21-5M-09	21	6F	St.	33.42	32.28	38	24	-	14.5	22.5	Solid	38.0x26.5x1.0
22-5M-09	22	6F	St.	35.01	33.87	39	25.5	-	14.5	22.5	Solid	39.0x28.0x1.0
24-5M-09	24	6F	St.	38.2	37.06	42	27	-	14.5	22.5	Solid	42.0x30.5x1.0
26-5M-09	26	6F	St.	41.38	40.24	44	30	-	14.5	22.5	Solid	44.0x32.5x1.0
28-5M-09	28	6F	St.	44.56	43.42	48	30.5	-	14.5	22.5	Solid	48.0x37.0x1.0
30-5M-09	30	6F	St.	47.75	46.6	51	35	-	14.5	22.5	Solid	51.0x40.0x1.0
32-5M-09	32	6F	St.	50.93	49.79	54	38	-	14.5	22.5	8	54.0x43.0x1.0
36-5M-09	36	6F	St.	57.3	56.16	60	38	-	14.5	22.5	8	60.0x47.0x1.0
40-5M-09	40	6F	St.	63.66	62.52	71	38	-	14.5	22.5	8	71.0x56.0x1.0
44-5M-09	44	6W	Alu.	70.03	68.89	-	38	54	14.5	25.5	8	-
48-5M-09	48	6W	Alu.	76.39	75.25	-	45	61	14.5	25.5	8	-
60-5M-09	60	6W	Alu.	95.49	94.35	-	45	80	14.5	25.5	8	-
72-5M-09	72	6W	Alu.	114.59	113.45	-	45	100	14.5	25.5	8	-

Notes:


Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Timing Belt Pulleys -- 5M-15 Pilot Bore & Solid

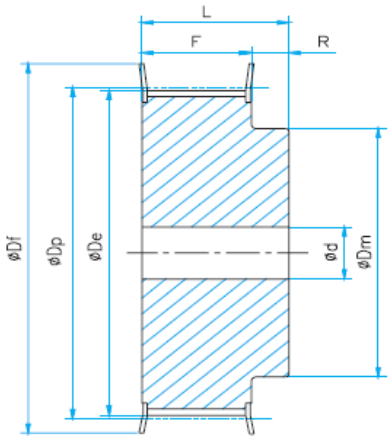

6F

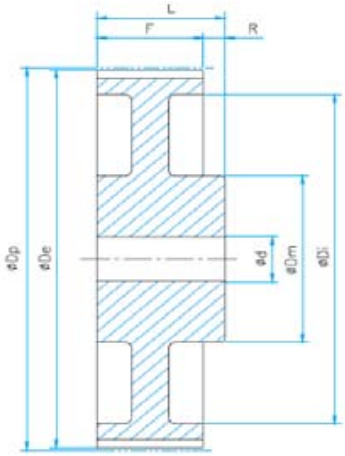

6W


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Di	Width **F**	Length **L**	Bore **d**	Flange Dimension
12-5M-15	12	6F	St.	19.1	17.96	23	12	-	20.5	26	Solid	23.0x14.0x1.0
14-5M-15	14	6F	St.	22.28	21.14	25	13	-	20.5	26	Solid	25.0x15.0x1.0
15-5M-15	15	6F	St.	23.87	22.73	28	16	-	20.5	26	Solid	28.0x17.8x1.0
16-5M-15	16	6F	St.	25.46	24.32	28	16.2	-	20.5	26	Solid	28.0x17.8x1.0
18-5M-15	18	6F	St.	28.65	27.51	32	20	-	20.5	26	Solid	32.0x23.0x1.0
20-5M-15	20	6F	St.	31.83	30.69	36	23	-	20.5	26	Solid	36.0x25.0x1.0
21-5M-15	21	6F	St.	33.42	32.28	38	24	-	20.5	26	Solid	38.0x26.5x1.0
22-5M-15	22	6F	St.	35.01	33.87	39	25.5	-	20.5	26	Solid	39.0x28.0x1.0
24-5M-15	24	6F	St.	38.2	37.06	42	27	-	20.5	28	Solid	42.0x30.5x1.0
26-5M-15	26	6F	St.	41.38	40.24	44	30	-	20.5	28	Solid	44.0x32.5x1.0
28-5M-15	28	6F	St.	44.56	43.42	48	30.5	-	20.5	28	Solid	48.0x37.0x1.0
30-5M-15	30	6F	St.	47.75	46.6	51	35	-	20.5	28	Solid	51.0x40.0x1.0
32-5M-15	32	6F	St.	50.93	49.79	54	38	-	20.5	28	8	54.0x43.0x1.0
36-5M-15	36	6F	St.	57.3	56.16	60	38	-	20.5	28	8	60.0x47.0x1.0
40-5M-15	40	6F	St.	63.66	62.52	71	38	-	20.5	28	8	71.0x56.0x1.0
44-5M-15	44	6W	Alu.	70.03	68.89	-	38	54	20.5	30	8	-
48-5M-15	48	6W	Alu.	76.39	75.25	-	45	61	20.5	30	8	-
60-5M-15	60	6W	Alu.	95.49	94.35	-	45	80	20.5	30	8	-
72-5M-15	72	6W	Alu.	114.59	113.45	-	45	100	20.5	30	8	-

Notes:


Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Timing Belt Pulleys -- 5M-25 Pilot Bore & Solid

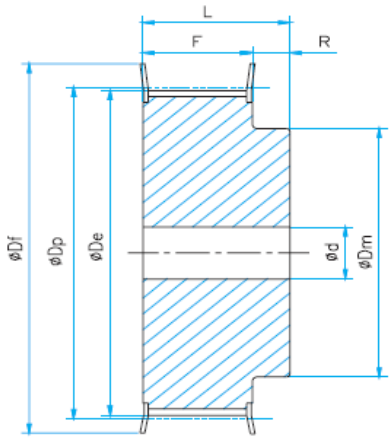

6F

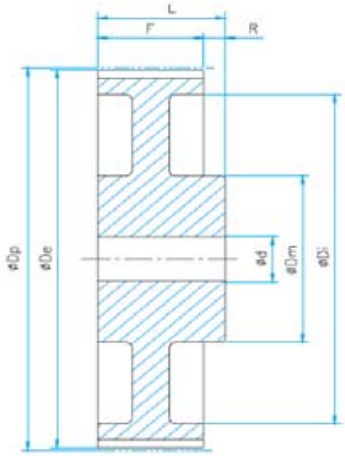

6W


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Di	Width **F**	Length **L**	Bore **d**	Flange Dimension
12-5M-25	12	6F	St.	19.1	17.96	23	12	-	30.5	36	Solid	23.0x14.0x1.0
14-5M-25	14	6F	St.	22.28	21.14	25	13	-	30.5	36	Solid	25.0x15.0x1.0
15-5M-25	15	6F	St.	23.87	22.73	28	16	-	30.5	36	Solid	28.0x17.8x1.0
16-5M-25	16	6F	St.	25.46	24.32	28	16.5	-	30.5	36	Solid	28.0x17.8x1.0
18-5M-25	18	6F	St.	28.65	27.51	32	20	-	30.5	36	Solid	32.0x23.0x1.0
20-5M-25	20	6F	St.	31.83	30.69	36	23	-	30.5	36	Solid	36.0x25.0x1.0
21-5M-25	21	6F	St.	33.42	32.28	38	24	-	30.5	38.5	Solid	38.0x26.5x1.0
22-5M-25	22	6F	St.	35.01	33.87	39	25.5	-	30.5	38.5	Solid	39.0x28.0x1.0
24-5M-25	24	6F	St.	38.2	37.06	42	27	-	30.5	38.5	Solid	42.0x30.5x1.0
26-5M-25	26	6F	St.	41.38	40.24	44	30	-	30.5	38.5	Solid	44.0x32.5x1.0
28-5M-25	28	6F	St.	44.56	43.42	48	30.5	-	30.5	38.5	Solid	48.0x37.0x1.0
30-5M-25	30	6F	St.	47.75	46.6	51	35	-	30.5	38.5	Solid	51.0x40.0x1.0
32-5M-25	32	6F	St.	50.93	49.79	54	38	-	30.5	38.5	8	54.0x43.0x1.0
36-5M-25	36	6F	St.	57.3	56.16	60	38	-	30.5	38.5	8	60.0x47.0x1.0
40-5M-25	40	6F	St.	63.66	62.52	71	38	-	30.5	38.5	8	71.0x56.0x1.0
44-5M-25	44	6W	Alu.	70.03	68.89	-	38	54	30.5	40.5	8	-
48-5M-25	48	6W	Alu.	76.39	75.25	-	45	61	30.5	40.5	8	-
60-5M-25	60	6W	Alu.	95.49	94.35	-	45	80	30.5	40.5	8	-
72-5M-25	72	6W	Alu.	114.59	113.45	-	45	100	30.5	40.5	8	-

Notes:

Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Timing Belt Pulleys -- 8M-20 Pilot Bore

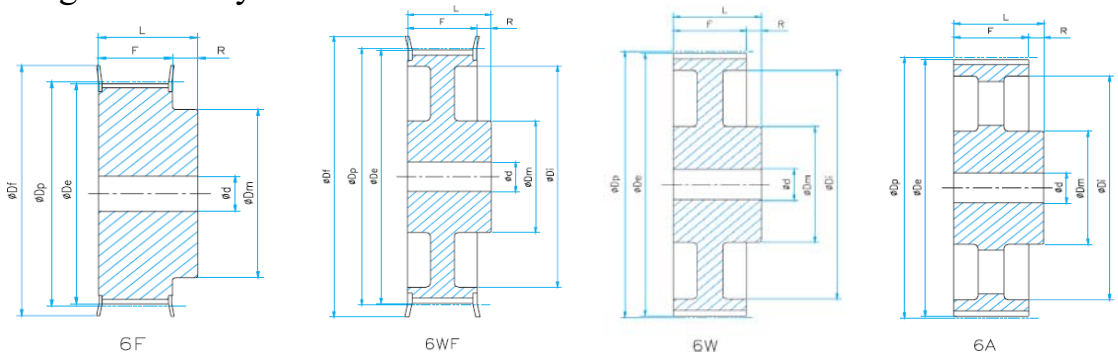


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Di	Width **F**	Length **L**	Bore **d**	Flange Dimension
22-8M-20	22	6F	St.	56.02	54.65	60	43	-	28	38	12	60.0x47.0x1.5
24-8M-20	24	6F	St.	61.12	59.75	66	45	-	28	38	12	66.0x52.0x1.5
26-8M-20	26	6F	St.	66.21	64.84	70	48	-	28	38	12	70.0x53.0x1.5
28-8M-20	28	6F	St.	71.3	69.93	75	50	-	28	38	15	75.0x60.0x1.5
30-8M-20	30	6F	St.	76.39	75.02	83	55	-	28	38	15	83.0x68.0x1.5
32-8M-20	32	6F	St.	81.49	80.12	87	60	-	28	38	15	87.0x72.0x1.5
34-8M-20	34	6F	St.	86.58	85.22	91	70	-	28	38	15	91.0x73.0x1.5
36-8M-20	36	6F	St.	91.67	90.3	97	75	-	28	38	15	97.0x79.0x1.5
38-8M-20	38	6F	St.	96.77	95.39	102	75	-	28	38	15	102.0x82.5x1.5
40-8M-20	40	6F	St.	101.86	100.49	106	75	-	28	38	15	106.0x90.0x1.5
44-8M-20	44	6F	St.	112.05	110.67	120	75	-	28	38	15	120.0x99.5x1.5
48-8M-20	48	6F	St.	122.23	120.86	128	75	-	28	38	15	128.0x107.0x1.5
56-8M-20	56	6WF	St.	142.6	141.23	150	80	116	28	38	15	150.0x130.0x1.5
64-8M-20	64	6WF	St.	162.97	161.6	168	80	137	28	38	15	168.0x148.0x1.5
72-8M-20	72	6WF	St.	183.35	181.97	192	80	158	28	38	15	192.0x173.0x1.5
80-8M-20	80	6W	C.I.	203.72	202.35	-	90	180	28	38	15	-
90-8M-20	90	6A	C.I.	229.18	227.81	-	90	204	28	38	15	-
112-8M-20	112	6A	C.I.	285.21	283.83	-	90	254	28	38	18	-
144-8M-20	144	6A	C.I.	366.69	365.32	-	90	336	28	38	20	-
168-8M-20	168	6A	C.I.	427.81	426.44	-	100	400	28	38	20	-
192-8M-20	192	6A	C.I.	488.92	487.55	-	100	460	28	38	20	-

Notes:

Setscrew hole are available upon request

Flange dimension O.D.x I.D. x thickness

Metric Timing Belt Pulleys -- 8M-30 Pilot Bore

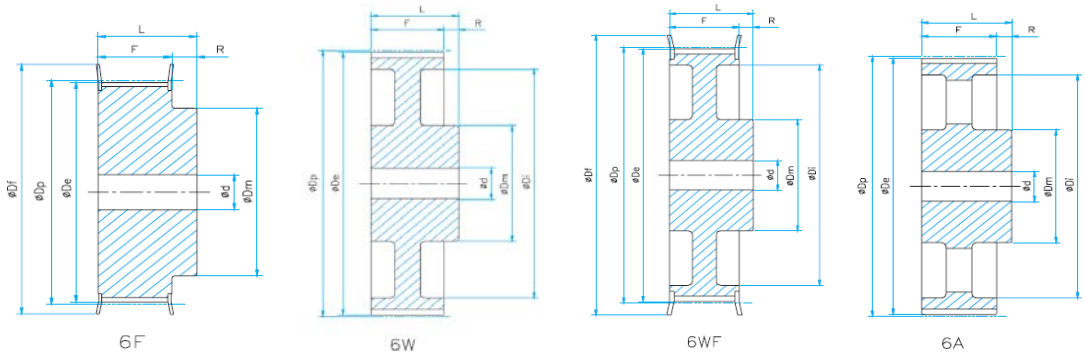


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Di	Width **F**	Length **L**	Bore **d**	Flange Dimension
22-8M-30	22	6F	St.	56.02	54.65	60	43	-	38	48	12	60.0x47.0x1.5
24-8M-30	24	6F	St.	61.12	59.75	66	45	-	38	48	12	66.0x52.0x1.5
26-8M-30	26	6F	St.	66.21	64.84	70	48	-	38	48	12	70.0x53.0x1.5
28-8M-30	28	6F	St.	71.3	69.93	75	50	-	38	48	15	75.0x60.0x1.5
30-8M-30	30	6F	St.	76.39	75.02	83	55	-	38	48	15	83.0x68.0x1.5
32-8M-30	32	6F	St.	81.49	80.12	87	60	-	38	48	15	87.0x72.0x1.5
34-8M-30	34	6F	St.	86.58	85.22	91	70	-	38	48	15	91.0x73.0x1.5
36-8M-30	36	6F	St.	91.67	90.3	97	75	-	38	48	15	97.0x79.0x1.5
38-8M-30	38	6F	St.	96.77	95.39	102	75	-	38	48	15	102.0x82.5x1.5
40-8M-30	40	6F	St.	101.86	100.49	106	75	-	38	48	15	106.0x90.0x1.5
44-8M-30	44	6F	St.	112.05	110.67	120	75	-	38	48	15	120.0x99.5x1.5
48-8M-30	48	6F	St.	122.23	120.86	128	75	-	38	48	15	128.0x107.0x1.5
56-8M-30	56	6WF	St.	142.6	141.23	150	90	116	38	48	15	150.0x130.0x1.5
64-8M-30	64	6WF	St.	162.97	161.6	168	90	137	38	48	15	168.0x148.0x1.5
72-8M-30	72	6WF	St.	183.35	181.97	192	95	158	38	48	15	192.0x173.0x1.5
80-8M-30	80	6W	C.I.	203.72	202.35	-	100	180	38	48	15	-
90-8M-30	90	6A	C.I.	229.18	227.81	-	100	204	38	48	15	-
112-8M-30	112	6A	C.I.	285.21	283.83	-	100	254	38	48	18	-
144-8M-30	144	6A	C.I.	366.69	365.32	-	100	336	38	48	20	-
168-8M-30	168	6A	C.I.	427.81	426.44	-	100	400	38	48	20	-
192-8M-30	192	6A	C.I.	488.92	487.55	-	100	460	38	48	20	-

Notes:


Finished bore with keyway and setscrew are available upon request

Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 8M-50 Pilot Bore




6F

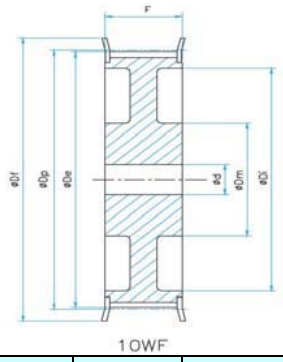

10WF



10W



10A


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Di	Width **F**	Length **L**	Bore **d**	Flange Dimension
22-8M-50	22	6F	St.	56.02	54.65	60	43	-	60	70	12	60.0x47.0x1.5
24-8M-50	24	6F	St.	61.12	59.75	66	45	-	60	70	12	66.0x52.0x1.5
26-8M-50	26	6F	St.	66.21	64.84	70	48	-	60	70	15	70.0x53.0x1.5
28-8M-50	28	6F	St.	71.3	69.93	75	50	-	60	70	15	75.0x60.0x1.5
30-8M-50	30	6F	St.	76.39	75.02	83	55	-	60	70	15	83.0x68.0x1.5
32-8M-50	32	6F	St.	81.49	80.12	87	60	-	60	70	15	87.0x72.0x1.5
34-8M-50	34	6F	St.	86.58	85.22	91	70	-	60	70	15	91.0x73.0x1.5
36-8M-50	36	6F	St.	91.67	90.3	97	75	-	60	70	15	97.0x79.0x1.5
38-8M-50	38	6F	St.	96.77	95.39	102	75	-	60	70	15	102.0x82.5x1.5
40-8M-50	40	6F	St.	101.86	100.49	106	75	-	60	70	18	106.0x90.0x1.5
44-8M-50	44	6F	St.	112.05	110.67	120	75	-	60	70	18	120.0x99.5x1.5
48-8M-50	48	6F	St.	122.23	120.86	128	75	-	60	70	18	128.0x107.0x1.5
56-8M-50	56	10WF	St.	142.6	141.23	150	90	116	60	60	18	150.0x130.0x1.5
64-8M-50	64	10WF	St.	162.97	161.6	168	90	137	60	60	18	168.0x148.0x1.5
72-8M-50	72	10WF	St.	183.35	181.97	192	100	158	60	60	18	192.0x173.0x1.5
80-8M-50	80	10W	C.I.	203.72	202.35	-	110	180	60	60	18	-
90-8M-50	90	10A	C.I.	229.18	227.81	-	110	204	60	60	18	-
112-8M-50	112	10A	C.I.	285.21	283.83	-	110	254	60	60	18	-
144-8M-50	144	10A	C.I.	366.69	365.32	-	110	336	60	60	20	-
168-8M-50	168	10A	C.I.	427.81	426.44	-	120	400	60	60	20	-
192-8M-50	192	10A	C.I.	488.92	487.55	-	130	460	60	60	20	-

Notes:

Finished bore are available upon request

Flange dimension O.D.x I.D. x thickness

Metric Timing Belt Pulleys -- 8M-85 Pilot Bore

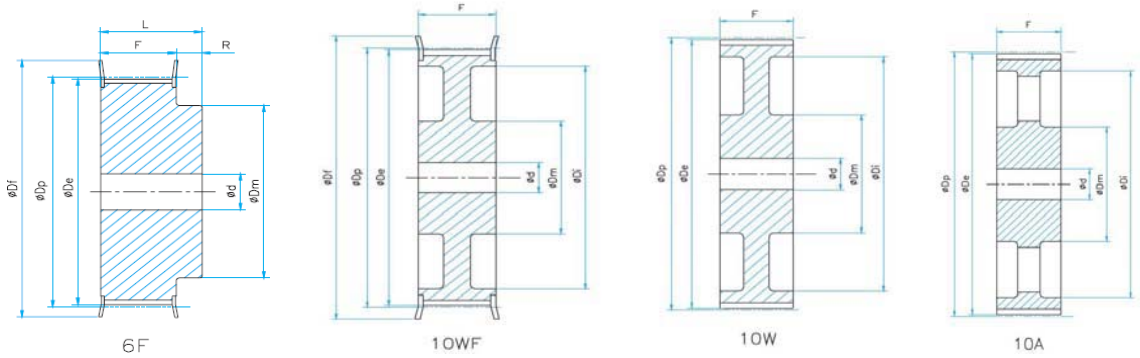


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Di	Width **F**	Length **L**	Bore **d**	Flange Dimension
22-8M-85	22	6F	St.	56.02	54.65	60	43	-	95	105	12	60.0x47.0x1.5
24-8M-85	24	6F	St.	61.12	59.75	66	45	-	95	105	12	66.0x52.0x1.5
26-8M-85	26	6F	St.	66.21	64.84	70	48	-	95	105	12	70.0x53.0x1.5
28-8M-85	28	6F	St.	71.3	69.93	75	50	-	95	105	15	75.0x60.0x1.5
30-8M-85	30	6F	St.	76.39	75.02	83	55	-	95	105	15	83.0x68.0x1.5
32-8M-85	32	6F	St.	81.49	80.12	87	60	-	95	105	15	87.0x72.0x1.5
34-8M-85	34	6F	St.	86.58	85.22	91	66	-	95	105	15	91.0x73.0x1.5
36-8M-85	36	6F	St.	91.67	90.3	97	70	-	95	105	15	97.0x79.0x1.5
38-8M-85	38	6F	St.	96.77	95.39	102	75	-	95	105	15	102.0x82.5x1.5
40-8M-85	40	6F	St.	101.86	100.49	106	75	-	95	105	18	106.0x90.0x1.5
44-8M-85	44	6F	St.	112.05	110.67	120	75	-	95	105	18	120.0x99.5x1.5
48-8M-85	48	6F	St.	122.23	120.86	128	80	-	95	105	18	128.0x107.0x1.5
56-8M-85	56	6F	St.	142.6	141.23	150	90	-	95	105	18	150.0x130.0x1.5
64-8M-85	64	10WF	St.	162.97	161.6	168	100	137	95	95	20	168.0x148.0x1.5
72-8M-85	72	10WF	St.	183.35	181.97	192	100	158	95	95	20	192.0x173.0x1.5
80-8M-85	80	10W	C.I.	203.72	202.35	-	110	180	95	95	20	-
90-8M-85	90	10A	C.I.	229.18	227.81	-	110	204	95	95	20	-
112-8M-85	112	10A	C.I.	285.21	283.83	-	110	254	95	95	24	-
144-8M-85	144	10A	C.I.	366.69	365.32	-	110	336	95	95	24	-
168-8M-85	168	10A	C.I.	427.81	426.44	-	120	400	95	95	24	-
192-8M-85	192	10A	C.I.	488.92	487.55	-	130	460	95	95	24	-

Notes:

Finished bore are available upon request

Flange dimension O.D.x I.D. x thickness

Metric Timing Belt Pulleys -- 14M-40 Pilot Bore

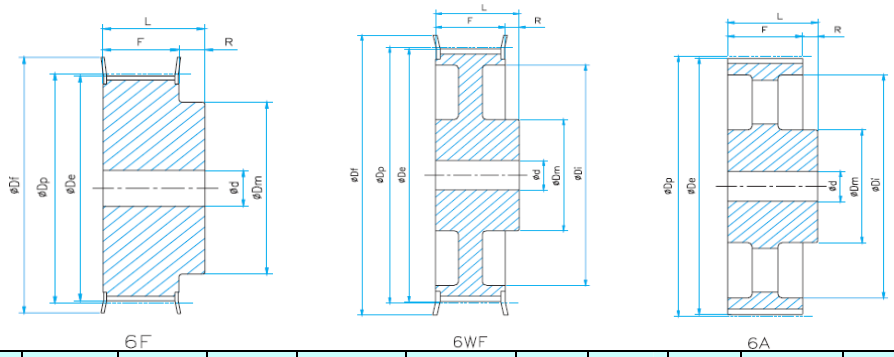


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Di	Width **F**	Length **L**	Bore **d**	Flange Dimension
28-14M-40	28	6F	St.	124.78	122.12	128	100	-	54	69	24	128.0x107.0x2.5
29-14M-40	29	6F	St.	129.23	126.57	138	100	-	54	69	24	138.0x112.0x2.5
30-14M-40	30	6F	St.	133.69	130.99	138	100	-	54	69	24	138.0x112.0x2.5
32-14M-40	32	6F	St.	142.6	139.88	154	100	-	54	69	24	154.0x122.0x2.5
34-14M-40	34	6F	St.	151.52	148.79	160	100	-	54	69	24	160.0x130.0x2.5
36-14M-40	36	6F	St.	160.43	157.68	168	100	-	54	69	24	168.0x135.0x2.5
38-14M-40	38	6F	St.	169.34	166.6	183	120	-	54	69	24	183.0x145.0x2.5
40-14M-40	40	6F	St.	178.25	175.49	188	120	-	54	69	24	188.0x150.0x2.5
44-14M-40	44	6F	St.	196.08	193.28	211	120	-	54	69	24	211.0x173.0x2.5
48-14M-40	48	6WF	C.I.	213.9	211.11	226	135	170	54	69	24	226.0x190.0x2.5
56-14M-40	56	6WF	C.I.	249.55	246.76	256	135	207	54	69	28	256.0x225.0x2.5
64-14M-40	64	6WF	C.I.	285.21	282.41	296	135	240	54	69	28	296.0x260.0x2.5
72-14M-40	72	6A	C.I.	320.86	318.06	-	135	280	54	69	28	-
80-14M-40	80	6A	C.I.	356.51	353.71	-	135	314	54	69	28	-
90-14M-40	90	6A	C.I.	401.07	398.28	-	135	358	54	69	28	-
112-14M-40	112	6A	C.I.	499.11	496.32	-	135	456	54	69	28	-
144-14M-40	144	6A	C.I.	641.71	638.92	-	135	600	54	69	28	-
168-14M-40	168	6A	C.I.	748.66	745.87	-	135	706	54	69	28	-
192-14M-40	192	6A	C.I.	855.62	852.82	-	135	813	54	69	28	-
216-14M-40	216	6A	C.I.	962.57	959.76	-	150	920	54	69	28	-

Notes:


Finished bore are available upon request

Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 14M-55 Pilot Bore



6F



10WF



10A


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Di	Width **F**	Length **L**	Bore **d**	Flange Dimension
28-14M-55	28	6F	St.	124.78	121.99	128	100	-	70	85	24	128.0x107.0x2.5
29-14M-55	29	6F	St.	129.23	126.44	138	100	-	70	85	24	138.0x112.0x2.5
30-14M-55	30	6F	St.	133.69	130.99	138	100	-	70	85	24	138.0x112.0x2.5
32-14M-55	32	6F	St.	142.6	139.88	154	100	-	70	85	24	154.0x122.0x2.5
34-14M-55	34	6F	St.	151.52	148.79	160	100	-	70	85	24	160.0x130.0x2.5
36-14M-55	36	6F	St.	160.43	157.68	168	100	-	70	85	24	168.0x135.0x2.5
38-14M-55	38	6F	St.	169.34	166.6	183	120	-	70	85	24	183.0x145.0x2.5
40-14M-55	40	6F	St.	178.25	175.49	188	120	-	70	85	24	188.0x150.0x2.5
44-14M-55	44	6F	St.	196.08	193.28	211	120	-	70	85	24	211.0x173.0x2.5
48-14M-55	48	10WF	C.I.	213.9	211.11	226	135	170	70	70	24	226.0x190.0x2.5
56-14M-55	56	10WF	C.I.	249.55	246.76	256	135	207	70	70	28	256.0x225.0x2.5
64-14M-55	64	10WF	C.I.	285.21	282.41	296	135	240	70	70	28	296.0x260.0x2.5
72-14M-55	72	10A	C.I.	320.86	318.06	-	135	280	70	70	28	-
80-14M-55	80	10A	C.I.	356.51	353.71	-	135	314	70	70	28	-
90-14M-55	90	10A	C.I.	401.07	398.28	-	135	358	70	70	28	-
112-14M-55	112	10A	C.I.	499.11	496.32	-	135	456	70	70	28	-
144-14M-55	144	10A	C.I.	641.71	638.92	-	135	600	70	70	28	-
168-14M-55	168	10A	C.I.	748.66	745.87	-	135	706	70	70	28	-
192-14M-55	192	10A	C.I.	855.62	852.82	-	135	813	70	70	28	-
216-14M-55	216	10A	C.I.	962.57	959.76	-	150	920	70	70	28	-

Notes:


Finished bore are available upon request

Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 14M-85 Pilot Bore



6F



10WF



10A


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Di	Width **F**	Length **L**	Bore **d**	Flange Dimension
28-14M-85	28	6F	St.	124.78	122.12	128	100	-	102	117	24	128.0x107.0x2.5
29-14M-85	29	6F	St.	129.23	126.57	138	100	-	102	117	24	138.0x112.0x2.5
30-14M-85	30	6F	St.	133.69	130.99	138	100	-	102	117	24	138.0x112.0x2.5
32-14M-85	32	6F	St.	142.6	139.88	154	100	-	102	117	24	154.0x122.0x2.5
34-14M-85	34	6F	St.	151.52	148.79	160	100	-	102	117	24	160.0x130.0x2.5
36-14M-85	36	6F	St.	160.43	157.68	168	100	-	102	117	32	168.0x135.0x2.5
38-14M-85	38	6F	St.	169.34	166.6	183	120	-	102	117	32	183.0x145.0x2.5
40-14M-85	40	6F	St.	178.25	175.49	188	135	-	102	117	32	188.0x150.0x2.5
44-14M-85	44	6F	St.	196.08	193.28	211	135	-	102	117	32	211.0x173.0x2.5
48-14M-85	48	6F	St.	213.9	211.11	226	150	-	102	117	32	226.0x190.0x2.5
56-14M-85	56	10WF	C.I.	249.55	246.76	256	150	207	102	102	32	256.0x225.0x2.5
64-14M-85	64	10WF	C.I.	285.21	282.41	296	150	240	102	102	32	296.0x260.0x2.5
72-14M-85	72	10A	C.I.	320.86	318.06	-	150	278	102	102	32	-
80-14M-85	80	10A	C.I.	356.51	353.71	-	150	314	102	102	32	-
90-14M-85	90	10A	C.I.	401.07	398.28	-	150	358	102	102	32	-
112-14M-85	112	10A	C.I.	499.11	496.32	-	150	456	102	102	32	-
144-14M-85	144	10A	C.I.	641.71	638.92	-	150	600	102	102	32	-
168-14M-85	168	10A	C.I.	748.66	745.87	-	150	706	102	102	32	-
192-14M-85	192	10A	C.I.	855.62	852.82	-	165	813	102	102	32	-
216-14M-85	216	10A	C.I.	962.57	959.76	-	160	920	102	102	32	-

Notes:


Finished bore are available upon request

Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 14M-115 Pilot Bore



6F



10WF



10A


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Di	Width **F**	Length **L**	Bore **d**	Flange Dimension
28-14M-115	28	6F	St.	124.78	122.12	128	100	-	133	148	32	128.0x107.0x2.5
29-14M-115	29	6F	St.	129.23	126.57	138	100	-	133	148	32	138.0x112.0x2.5
30-14M-115	30	6F	St.	133.69	130.99	138	100	-	133	148	32	138.0x112.0x2.5
32-14M-115	32	6F	St.	142.6	139.88	154	100	-	133	148	32	154.0x122.0x2.5
34-14M-115	34	6F	St.	151.52	148.79	160	100	-	133	148	32	160.0x130.0x2.5
36-14M-115	36	6F	St.	160.43	157.68	168	100	-	133	148	32	168.0x135.0x2.5
38-14M-115	38	6F	St.	169.34	166.6	183	120	-	133	148	32	183.0x145.0x2.5
40-14M-115	40	6F	St.	178.25	175.49	188	135	-	133	148	32	188.0x150.0x2.5
44-14M-115	44	6F	St.	196.08	193.28	211	140	-	133	148	32	211.0x173.0x2.5
48-14M-115	48	6F	St.	213.9	211.11	226	150	-	133	148	32	226.0x190.0x2.5
56-14M-115	56	6F	St.	249.55	246.76	256	150	-	133	148	32	256.0x225.0x2.5
64-14M-115	64	10WF	C.I.	285.21	282.41	296	150	240	133	133	32	296.0x260.0x2.5
72-14M-115	72	10A	C.I.	320.86	318.06	-	150	278	133	133	32	-
80-14M-115	80	10A	C.I.	356.51	353.71	-	150	314	133	133	32	-
90-14M-115	90	10A	C.I.	401.07	398.28	-	150	358	133	133	32	-
112-14M-115	112	10A	C.I.	499.11	496.32	-	150	456	133	133	32	-
144-14M-115	144	10A	C.I.	641.71	638.92	-	165	600	133	133	32	-
168-14M-115	168	10A	C.I.	748.66	745.87	-	165	706	133	133	32	-
192-14M-115	192	10A	C.I.	855.62	852.82	-	165	813	133	133	32	-
216-14M-115	216	10A	C.I.	962.57	959.76	-	165	920	133	133	32	-

Notes:


Finished bore are available upon request

Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 14M-170 Pilot Bore



6F



10WF



10A


Part No.	Teeth No.	Type	Mat'l	**Dp**	**De**	**Df**	Hub Dia. **Dm**	Di	Width **F**	Length **L**	Bore **d**	Flange Dimension
28-14M-170	28	6F	St.	124.78	121.12	128	100	-	187	202	32	128.0x107.0x2.5
29-14M-170	29	6F	St.	129.23	126.57	138	100	-	187	202	32	138.0x112.0x2.5
30-14M-170	30	6F	St.	133.69	130.99	138	100	-	187	202	32	138.0x112.0x2.5
32-14M-170	32	6F	St.	142.6	139.88	154	100	-	187	202	32	154.0x122.0x2.5
34-14M-170	34	6F	St.	151.52	148.79	160	100	-	187	202	32	160.0x130.0x2.5
36-14M-170	36	6F	St.	160.43	157.68	168	100	-	187	202	32	168.0x135.0x2.5
38-14M-170	38	6F	St.	169.34	166.6	183	120	-	187	202	32	183.0x145.0x2.5
40-14M-170	40	6F	St.	178.25	175.49	188	135	-	187	202	32	188.0x150.0x2.5
44-14M-170	44	6F	St.	196.08	193.28	211	140	-	187	202	32	211.0x173.0x2.5
48-14M-170	48	6F	St.	213.9	211.11	226	150	-	187	202	32	226.0x190.0x2.5
56-14M-170	56	6F	St.	249.55	246.76	256	150	-	187	202	32	256.0x225.0x2.5
64-14M-170	64	10WF	St.	285.21	282.41	296	150	240	187	187	32	296.0x260.0x2.5
72-14M-170	72	10A	C.I.	320.86	318.06	-	150	278	187	187	32	-
80-14M-170	80	10A	C.I.	356.51	353.71	-	150	314	187	187	32	-
90-14M-170	90	10A	C.I.	401.07	398.28	-	150	358	187	187	32	-
112-14M-170	112	10A	C.I.	499.11	496.32	-	150	456	187	187	32	-
144-14M-170	144	10A	C.I.	641.71	638.92	-	165	600	187	187	32	-
168-14M-170	168	10A	C.I.	748.66	745.87	-	165	706	187	187	32	-
192-14M-170	192	10A	C.I.	855.62	852.82	-	165	813	187	187	32	-
216-14M-170	216	10A	C.I.	962.57	959.76	-	165	920	187	187	32	-

Notes:

Finished bore are available upon request

Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 5M-15 Taper Bore

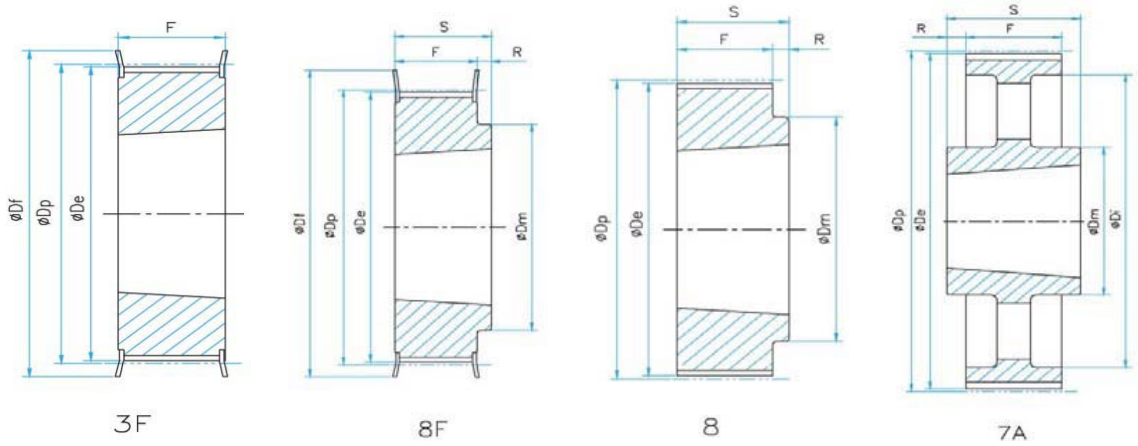

Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL34-5M-15	34	3F	St.	1008	54.11	52.97	57	-	-	22	22	-	57.0x47.0x1.0
TL36-5M-15	36	3F	St.	1108	57.3	56.15	60	-	-	22	22	-	60.0x47.0x1.0
TL38-5M-15	38	3F	St.	1108	60.48	59.34	66.5	-	-	22	22	-	66.5x52.0x1.0
TL40-5M-15	40	3F	St.	1108	63.66	62.52	71	-	-	22	22	-	71.0x56.0x1.0
TL44-5M-15	44	3F	St.	1108	70.03	68.89	75	-	-	22	22	-	75.0x60.0x1.0
TL48-5M-15	48	8F	St.	1210	76.39	75.25	83	59	-	22	25	3	83.0x68.0x1.0
TL56-5M-15	56	8F	St.	1210	89.13	87.99	93	70	-	22	25	3	93.0x80.0x1.0
TL64-5M-15	64	8F	St.	1210	101.86	100.72	106	80	-	22	25	3	106.0x90.0x1.0
TL72-5M-15	72	8	St.	1610	114.59	113.45	-	92	-	22	25	3	-
TL80-5M-15	80	8	St.	1610	127.32	126.18	-	92	-	22	25	3	-
TL90-5M-15	90	8	St.	1610	143.24	142.1	-	92	-	22	25	3	-
TL112-5M-15	112	8	St.	2012	178.25	177.11	-	110	-	20	32	12	-
TL136-5M-15	136	7A	St.	2012	216.45	215.31	-	110	199	20	32	6	-

Notes:
Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 8M-20 Taper Bore

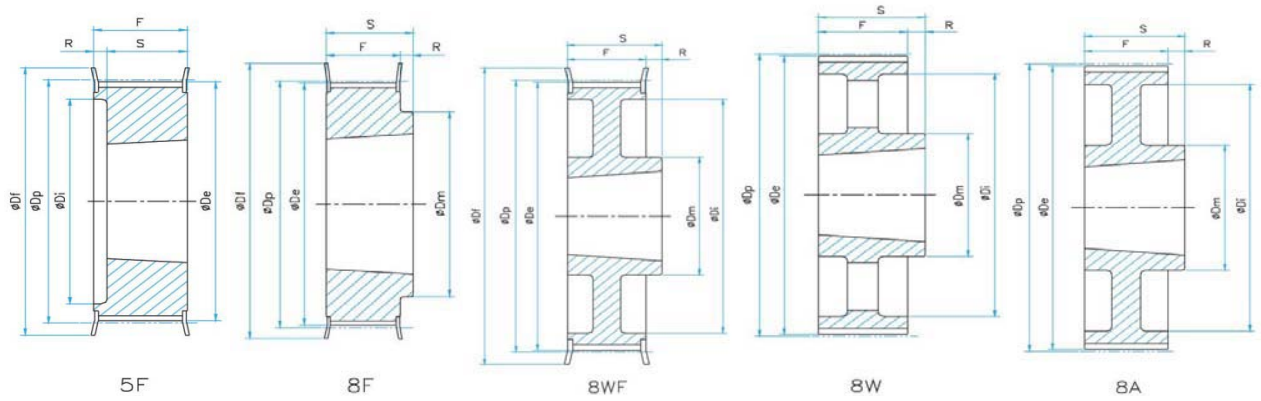

Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL22-8M-20	22	5F	St.	1108	56.02	54.65	60	-	37	28	22	6	60x47x1.5
TL24-8M-20	24	5F	St.	1108	61.12	59.75	66	-	44	28	22	6	66x52x1.5
TL26-8M-20	26	5F	St.	1108	66.21	64.84	70	-	45	28	22	6	70x53x1.5
TL28-8M-20	28	5F	St.	1108	71.3	69.93	75	-	50	28	22	6	75x60x1.5
TL30-8M-20	30	5F	St.	1108	76.39	75.02	83	-	58	28	22	6	83x68x1.5
TL32-8M-20	32	5F	St.	1610	81.49	80.12	87	-	63	28	25	3	87x72x1.5
TL34-8M-20	34	5F	St.	1610	86.58	85.22	91	-	64	28	25	3	91x73x1.5
TL36-8M-20	36	5F	St.	1610	91.67	90.3	97	-	68	28	25	3	97x79x1.5
TL38-8M-20	38	5F	St.	1610	96.77	95.39	102	-	72	28	25	3	102x82.5x1.5
TL40-8M-20	40	5F	St.	1610	101.86	100.49	106		76	28	25	3	106x90x1.5
TL44-8M-20	44	8F	St.	2012	112.05	110.67	120	93	-	28	32	4	120x99.5x1.5
TL48-8M-20	48	8F	St.	2012	122.23	120.86	128	96	-	28	32	4	128x107x1.5
TL56-8M-20	56	8F	St.	2012	142.6	141.23	150	110	-	28	32	4	150x130x1.5
TL64-8M-20	64	8WF	St.	2012	162.97	161.6	168	110	137	28	32	4	168x148x1.5
TL72-8M-20	72	8WF	St.	2012	183.35	181.97	192	110	158	28	32	4	192x173x1.5
TL80-8M-20	80	8W	C.I.	2012	203.72	202.35	-	110	180	28	32	4	-
TL90-8M-20	90	8A	C.I.	2012	229.18	227.81	-	110	204	28	32	4	-
TL144-8M-20	144	8A	C.I.	2517	366.69	365.32	-	125	336	28	32	4	-

Notes:
Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 8M-30 Taper Bore

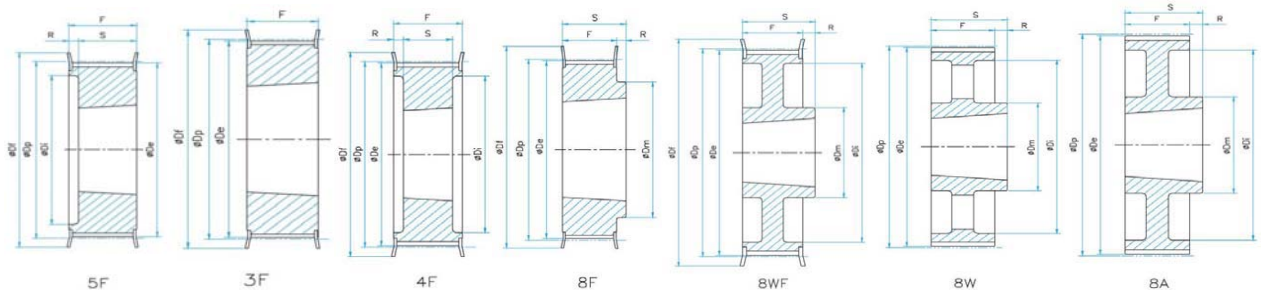

Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL22-8M-30	22	5F	St.	1108	56.02	54.65	60	-	37	38	22	16	60x47x1.5
TL24-8M-30	24	5F	St.	1108	61.12	59.75	66	-	44	38	22	16	66x52x1.5
TL26-8M-30	26	5F	St.	1108	66.21	64.84	70	-	44	38	22	16	70x53x1.5
TL28-8M-30	28	5F	St.	1210	71.3	69.93	75	-	50	38	25	13	75x60x1.5
TL30-8M-30	30	3F	St.	1615	76.39	75.02	83	-	-	38	38	-	83x68x1.5
TL32-8M-30	32	3F	St.	1615	81.49	80.12	87	-	-	38	38	-	87x72x1.5
TL34-8M-30	34	3F	St.	1615	86.58	85.22	91	-	-	38	38	-	91x73x1.5
TL36-8M-30	36	3F	St.	1615	91.67	90.3	97	-	-	38	38	-	97x79x1.5
TL38-8M-30	38	3F	St.	1615	96.77	95.39	102	-	-	38	38	-	102x82.5x1.5
TL40-8M-30	40	3F	St.	1615	101.86	100.49	106	-	-	38	38	-	106x90x1.5
TL44-8M-30	44	4F	St.	2012	112.05	110.67	120	-	86	38	32	3	120x99.5x1.5
TL48-8M-30	48	4F	St.	2012	122.23	120.86	128	-	90	38	32	3	128x107x1.5
TL56-8M-30	56	4F	St.	2012	142.6	141.23	150	-	110	38	32	3	150x130x1.5
TL64-8M-30	64	8F	St.	2517	162.97	161.6	168	125	-	38	45	7	168x148x1.5
TL72-8M-30	72	8WF	St.	2517	183.35	181.97	192	125	158	38	45	7	192x173x1.5
TL80-8M-30	80	8W	C.I.	2517	203.72	202.35	-	125	180	38	45	7	-
TL90-8M-30	90	8A	C.I.	2517	229.18	227.81	-	125	204	38	45	7	-
TL112-8M-30	112	8A	C.I.	2517	285.21	283.83	-	125	254	38	45	7	-
TL144-8M-30	144	8A	C.I.	2517	366.69	365.32	-	125	336	38	45	7	-

Notes:
Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 8M-50 Taper Bore

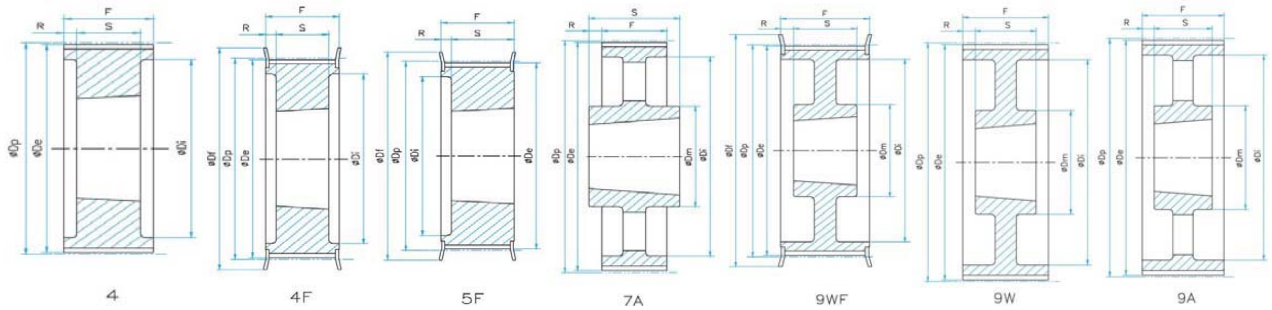

Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL28-8M-50	28	4F	St.	1210	71.3	69.93	75	-	50	60	25	18	75x60x1.5
TL30-8M-50	30	5F	St.	1615	76.39	75.02	83	-	58	60	38	22	83x68x1.5
TL32-8M-50	32	5F	St.	1615	81.49	80.12	87	-	62	60	38	22	87x72x1.5
TL34-8M-50	34	5F	St.	1615	86.58	85.22	91	-	65	60	38	22	91x73x1.5
TL36-8M-50	36	5F	St.	1615	91.67	90.3	97	-	68	60	38	22	97x79x1.5
TL38-8M-50	38	5F	St.	1615	96.77	95.39	102	-	72	60	38	22	102x82.5x1.5
TL40-8M-50	40	4F	St.	2012	101.86	100.49	106	-	82	60	32	14	106x90x1.5
TL44-8M-50	44	4F	St.	2012	112.05	110.67	120	-	91	60	32	14	120x99.5x1.5
TL48-8M-50	48	4F	St.	2012	122.23	120.86	128	-	95	60	32	14	128x107x1.5
TL56-8M-50	56	4F	St.	2517	142.6	141.23	150	-	116	60	45	7.5	150x130x1.5
TL64-8M-50	64	4F	St.	2517	162.97	161.6	168	-	137	60	45	7.5	168x148x1.5
TL72-8M-50	72	9WF	St.	2517	183.35	181.97	192	125	158	60	45	7.5	192x173x1.5
TL80-8M-50	80	4	C.I.	3020	203.72	202.35	-	-	180	60	51	4.5	-
TL90-8M-50	90	9W	C.I.	3020	229.18	227.81	-	170	204	60	51	4.5	-
TL112-8M-50	112	9W	C.I.	3020	285.21	283.83	-	170	260	60	51	4.5	-
TL144-8M-50	144	9A	C.I.	3020	366.69	365.32	-	170	341	60	51	4.5	-
TL168-8M-50	168	7A	C.I.	3525	427.81	426.44	-	198	395	60	65	2.5	-
TL192-8M-50	192	7A	C.I.	3525	488.92	487.55	-	198	455	60	65	2.5	-

Notes:
Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 8M-85 Taper Bore

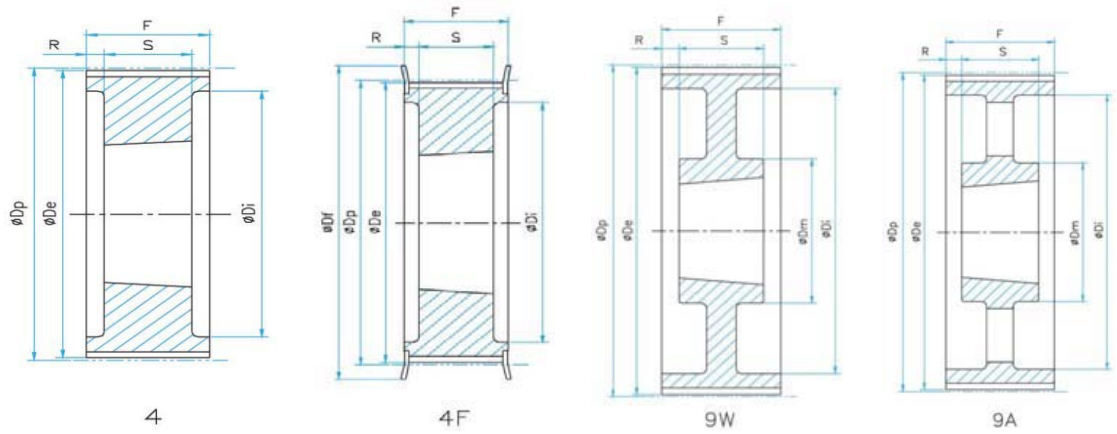

Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL34-8M-85	34	4F	St.	1615	86.58	85.22	91	-	65	95	38	29	91x73x1.5
TL36-8M-85	36	4F	St.	1615	91.67	90.3	97	-	68	95	38	29	97x79x1.5
TL38-8M-85	38	4F	St.	1615	96.77	95.39	102	-	72	95	38	29	102x82.5x1.5
TL40-8M-85	40	4F	St.	2012	101.86	100.49	106	-	82	95	32	32	106x90x1.5
TL44-8M-85	44	4F	St.	2012	112.05	110.67	120	-	91	95	32	32	120x99.5x1.5
TL48-8M-85	48	4F	St.	2517	122.23	120.86	128	-	100	95	45	25	128x107x1.5
TL56-8M-85	56	4F	St.	2517	142.6	141.23	150	-	117	95	45	25	150x130x1.5
TL64-8M-85	64	4F	St.	2517	162.97	161.6	168	-	137	95	45	25	168x148x1.5
TL72-8M-85	72	4F	St.	3020	183.35	181.97	192	-	158	95	51	22	192x173x1.5
TL80-8M-85	80	4	C.I.	3020	203.72	202.35	-	-	180	95	51	22	-
TL90-8M-85	90	9W	C.I.	3020	229.18	227.81	-	170	204	95	51	22	-
TL112-8M-85	112	9W	C.I.	3020	285.21	283.83	-	170	260	95	51	22	-
TL144-8M-85	144	9A	C.I.	3525	366.69	365.32	-	198	336	95	65	15	-
TL168-8M-85	168	9A	C.I.	3525	427.81	426.44	-	198	395	95	65	15	-
TL192-8M-85	192	9A	C.I.	3525	488.92	487.55	-	198	455	95	65	15	-

Notes:
Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 14M-40 Taper Bore

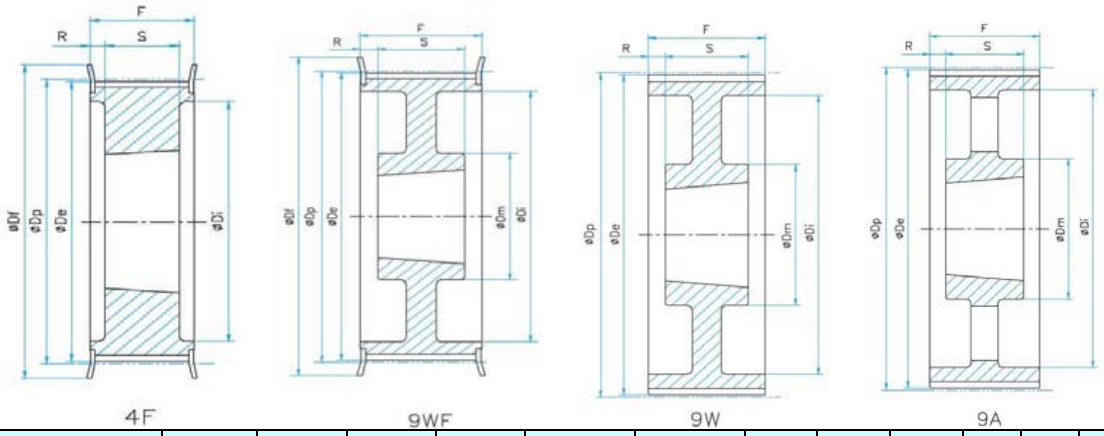

Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL28-14M-40	28	4F	St.	2012	124.78	122.12	128	-	94	54	32	11	128x107x2.5
TL29-14M-40	29	4F	St.	2012	129.23	126.57	138	-	98	54	32	11	138x112x2.5
TL30-14M-40	30	4F	St.	2012	133.69	130.99	138	-	98	54	32	11	138x112x2.5
TL32-14M-40	32	4F	St.	2012	142.6	139.88	154	-	108	54	32	11	154x122x2.5
TL34-14M-40	34	4F	St.	2517	151.52	148.79	160	-	110	54	45	4.5	160x130x2.5
TL36-14M-40	36	4F	St.	2517	160.43	157.68	168	-	120	54	45	4.5	168x135x2.5
TL38-14M-40	38	4F	St.	2517	169.34	166.6	183	-	130	54	45	4.5	183x145x2.5
TL40-14M-40	40	4F	St.	2517	178.25	175.49	188	-	138	54	45	4.5	188x150x2.5
TL44-14M-40	44	4F	St.	3020	196.08	193.28	211	-	155	54	51	1.5	211x173x2.5
TL48-14M-40	48	4F	St.	3020	213.9	211.11	226	-	170	54	51	1.5	226x190x2.5
TL56-14M-40	56	9WF	St.	3020	249.55	246.76	256	170	208	54	51	1.5	256x225x2.5
TL64-14M-40	64	9WF	C.I.	3020	285.21	282.41	296	170	240	54	51	1.5	296x260x2.5
TL72-14M-40	72	9W	C.I.	3020	320.86	318.06	-	170	280	54	51	1.5	-
TL80-14M-40	80	9A	C.I.	3020	356.51	353.71	-	170	315	54	51	1.5	-
TL90-14M-40	90	9A	C.I.	3020	401.07	398.28	-	170	360	54	51	1.5	-
TL112-14M-40	112	9A	C.I.	3020	499.11	496.32	-	170	457	54	51	1.5	-
TL144-14M-40	144	9A	C.I.	3020	641.71	638.92	-	170	600	54	51	1.5	-
TL168-14M-40	168	9A	C.I.	3020	748.66	745.87	-	170	706	54	51	1.5	-
TL192-14M-40	192	9A	C.I.	3020	855.62	852.82	-	170	813	54	51	1.5	-
TL216-14M-40	216	9A	C.I.	3020	962.57	959.76	-	170	920	54	51	1.5	-

Notes:
Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 14M-55 Taper Bore

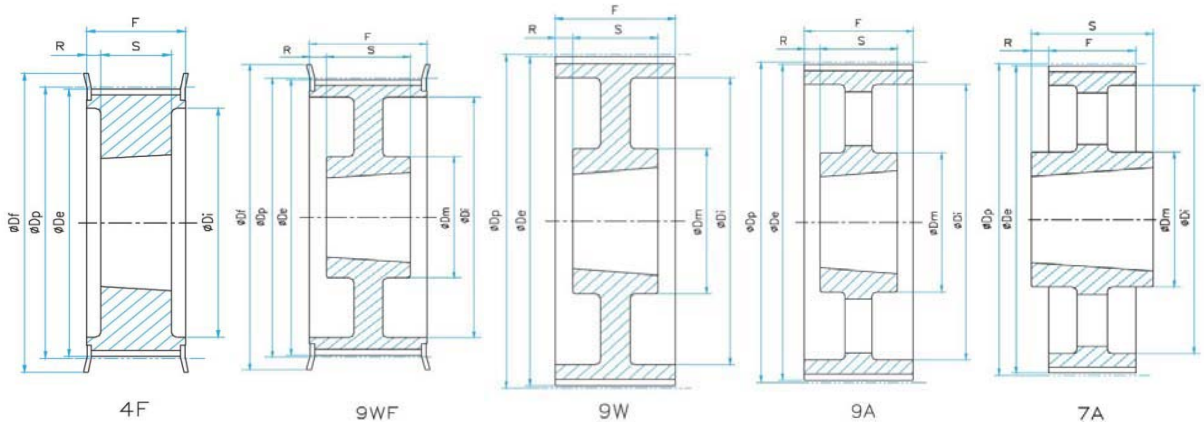

Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL28-14M-55	28	4F	St.	2012	124.78	122.12	128	-	94	70	32	19	128x107x2.5
TL29-14M-55	29	4F	St.	2012	129.23	126.57	138	-	100	70	32	19	138x112x2.5
TL30-14M-55	30	4F	St.	2517	133.69	130.99	138	-	100	70	45	13	138x112x2.5
TL32-14M-55	32	4F	St.	2517	142.6	139.88	154	-	108	70	45	13	154x122x2.5
TL34-14M-55	34	4F	St.	2517	151.52	148.79	160	-	110	70	45	13	160x130x2.5
TL36-14M-55	36	4F	St.	2517	160.43	157.68	168	-	120	70	45	13	168x135x2.5
TL38-14M-55	38	4F	St.	2517	169.34	166.6	183	-	130	70	45	13	183x145x2.5
TL40-14M-55	40	4F	St.	2517	178.25	175.49	188	-	138	70	45	13	188x150x2.5
TL44-14M-55	44	4F	St.	3020	196.08	193.28	211	-	155	70	51	9.5	211x173x2.5
TL48-14M-55	48	4F	St.	3020	213.9	211.11	226	-	170	70	51	9.5	226x190x2.5
TL56-14M-55	56	9WF	St.	3020	249.55	246.76	256	170	208	70	51	9.5	256x225x2.5
TL64-14M-55	64	9WF	C.I.	3020	285.21	282.41	296	170	240	70	51	9.5	296x260x2.5
TL72-14M-55	72	9W	C.I.	3020	320.86	318.06	-	170	280	70	51	9.5	-
TL80-14M-55	80	9A	C.I.	3020	356.51	353.71	-	170	315	70	51	9.5	-
TL90-14M-55	90	9A	C.I.	3020	401.07	398.28	-	170	360	70	51	9.5	-
TL112-14M-55	112	9A	C.I.	3020	499.11	496.32	-	170	457	70	51	9.5	-
TL144-14M-55	144	9A	C.I.	3020	641.71	638.92	-	170	600	70	51	9.5	-
TL168-14M-55	168	9A	C.I.	3020	748.66	745.87	-	170	706	70	51	9.5	-
TL192-14M-55	192	9A	C.I.	3020	855.62	852.82	-	170	813	70	51	9.5	-
TL216-14M-55	216	7A	C.I.	3535	962.57	959.76	-	190	920	70	89	9.5	-

Notes:
Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 14M-85 Taper Bore

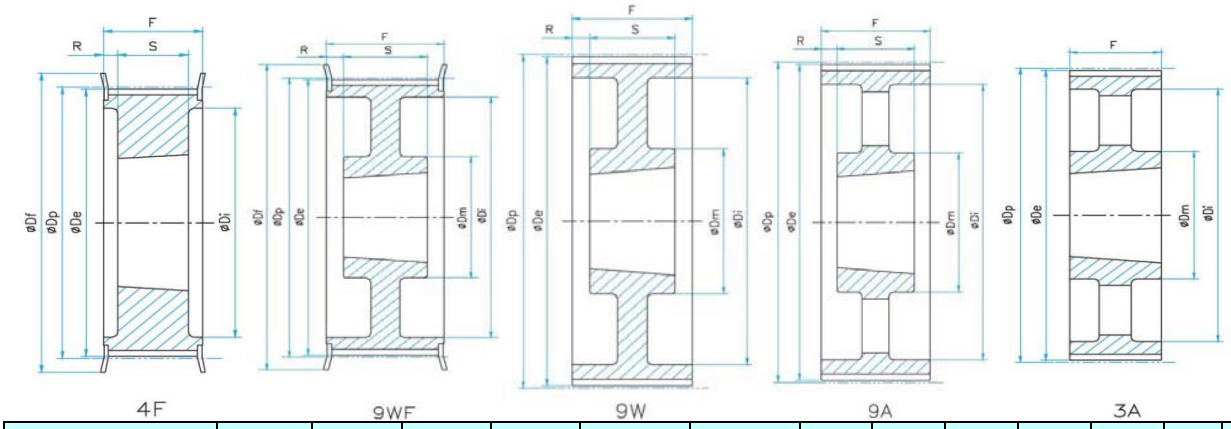


Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL28-14M-85	28	4F	St.	2517	124.78	122.12	128	-	98	102	45	29	128x107x2.5
TL29-14M-85	29	4F	St.	2517	129.23	126.57	138	-	100	102	45	29	138x112x2.5
TL30-14M-85	30	4F	St.	2517	133.69	130.99	138	-	100	102	45	29	138x112x2.5
TL32-14M-85	32	4F	St.	2517	142.6	139.88	154	-	108	102	45	29	154x122x2.5
TL34-14M-85	34	4F	St.	2517	151.52	148.79	160	-	110	102	45	29	160x130x2.5
TL36-14M-85	36	4F	St.	3020	160.43	157.68	168	-	120	102	51	26	168x135x2.5
TL38-14M-85	38	4F	St.	3020	169.34	166.6	183	-	130	102	51	26	183x145x2.5
TL40-14M-85	40	4F	St.	3020	178.25	175.49	188	-	138	102	51	26	188x150x2.5
TL44-14M-85	44	4F	St.	3020	196.08	193.28	211	-	153	102	51	26	211x173x2.5
TL48-14M-85	48	4F	St.	3020	213.9	211.11	226	-	170	102	51	26	226x190x2.5
TL56-14M-85	56	4F	St.	3525	249.55	246.76	256	170	210	102	65	19	256x225x2.5
TL64-14M-85	64	9WF	C.I.	3525	285.21	282.41	296	170	240	102	65	19	296x260x2.5
TL72-14M-85	72	9W	C.I.	3525	320.86	318.06	-	170	280	102	65	19	-
TL80-14M-85	80	9A	C.I.	3525	356.51	353.71	-	170	315	102	65	19	-
TL90-14M-85	90	9A	C.I.	3525	401.07	398.28	-	170	360	102	65	19	-
TL112-14M-85	112	9A	C.I.	3525	499.11	496.32	-	170	457	102	65	19	-
TL144-14M-85	144	9A	C.I.	3525	641.71	638.92	-	170	600	102	65	19	-
TL168-14M-85	168	9A	C.I.	3525	748.66	745.87	-	170	706	102	65	19	-
TL192-14M-85	192	3A	C.I.	4040	855.62	852.82	-	170	813	102	102	-	-
TL216-14M-85	216	3A	C.I.	4040	962.57	959.76	-	190	920	102	102	-	-

Notes:
Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 14M-115 Taper Bore

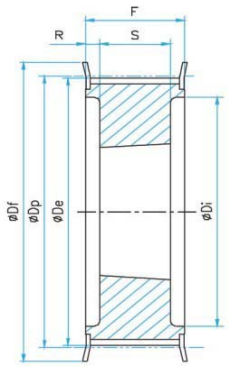


4F

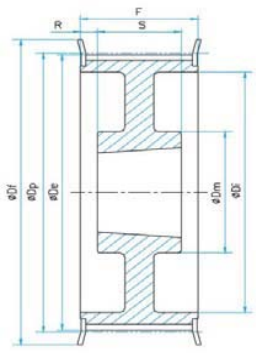

9WF

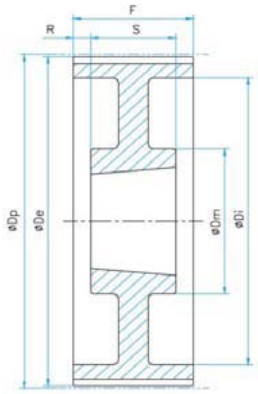

9W

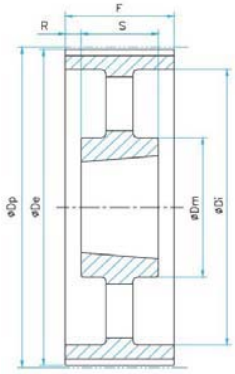


9A


Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL28-14M-115	28	4F	St.	2517	124.78	122.12	128	-	98	133	45	44	128x107x2.5
TL29-14M-115	29	4F	St.	2517	129.23	126.57	138	-	100	133	45	44	138x112x2.5
TL30-14M-115	30	4F	St.	2517	133.69	130.99	138	-	100	133	45	44	138x112x2.5
TL32-14M-115	32	4F	St.	2517	142.6	139.88	154	-	108	133	45	44	154x122x2.5
TL34-14M-115	34	4F	St.	2517	151.52	148.79	160	-	110	133	45	44	160x130x2.5
TL36-14M-115	36	4F	St.	3020	160.43	157.68	168	-	125	133	51	41	168x135x2.5
TL38-14M-115	38	4F	St.	3020	169.34	166.6	183	-	130	133	51	41	183x145x2.5
TL40-14M-115	40	4F	St.	3020	178.25	175.49	188	-	138	133	51	41	188x150x2.5
TL44-14M-115	44	4F	St.	3020	196.08	193.28	211	-	155	133	76	29	211x173x2.5
TL48-14M-115	48	4F	St.	3020	213.9	211.11	226	-	170	133	76	29	226x190x2.5
TL56-14M-115	56	4F	St.	3535	249.55	246.76	256	-	208	133	89	22	256x225x2.5
TL64-14M-115	64	9WF	C.I.	3535	285.21	282.41	296	190	240	133	89	22	296x260x2.5
TL72-14M-115	72	9W	C.I.	3535	320.86	318.06	-	190	280	133	89	22	-
TL80-14M-115	80	9A	C.I.	3535	356.51	353.71	-	190	315	133	89	22	-
TL90-14M-115	90	9A	C.I.	3535	401.07	398.28	-	190	360	133	89	22	-
TL112-14M-115	112	9A	C.I.	3535	499.11	496.32	-	190	457	133	89	22	-
TL144-14M-115	144	9A	C.I.	4040	641.71	638.92	-	230	600	133	102	16	-
TL168-14M-115	168	9A	C.I.	4040	748.66	745.87	-	230	706	133	102	16	-
TL192-14M-115	192	9A	C.I.	4040	855.62	852.82	-	230	813	133	102	16	-
TL216-14M-115	216	9A	C.I.	4040	962.57	959.76	-	230	920	133	102	16	-

Notes:
Flange dimension O.D.x I.D. x thickness


Metric Timing Belt Pulleys -- 14M-170 Taper Bore

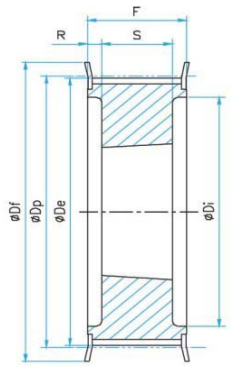

4F

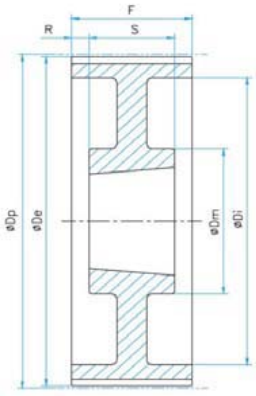


9W

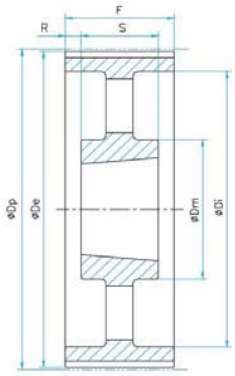


9A

Part No.	Teeth No.	Type	Mat'l	Bush No.	Dp	De	Df	Dm	Di	F	S	R	Flange Dimension
TL38-14M-170	38	4F	St.	3030	169.34	166.6	183	-	130	187	76	56	183x145x2.5
TL40-14M-170	40	4F	St.	3030	178.25	175.49	188	-	138	187	76	56	188x150x2.5
TL44-14M-170	44	4F	St.	3535	196.08	193.28	211	-	153	187	89	49	211x173x2.5
TL48-14M-170	48	4F	St.	3535	213.9	211.11	226	-	170	187	89	49	226x190x2.5
TL56-14M-170	56	4F	St.	3535	249.55	246.76	256	-	208	187	89	49	256x225x2.5
TL64-14M-170	64	4F	C.I.	4040	285.21	282.41	296	-	240	187	102	43	296x260x2.5
TL72-14M-170	72	9W	C.I.	4040	320.86	318.06	-	230	280	187	102	43	-
TL80-14M-170	80	9W	C.I.	4040	356.51	353.71	-	230	315	187	102	43	-
TL90-14M-170	90	9A	C.I.	4040	401.07	398.28	-	230	360	187	102	43	-
TL112-14M-170	112	9A	C.I.	5050	499.11	496.32	-	265	457	187	127	30	-
TL144-14M-170	144	9A	C.I.	5050	641.71	638.92	-	265	600	187	127	30	-
TL168-14M-170	168	9A	C.I.	5050	748.66	745.87	-	265	706	187	127	30	-
TL192-14M-170	192	9A	C.I.	5050	855.62	852.82	-	265	813	187	127	30	-
TL216-14M-170	216	9A	C.I.	5050	962.57	959.76	-	265	920	187	127	30	-


Notes:
Flange dimension O.D.x I.D. x thickness

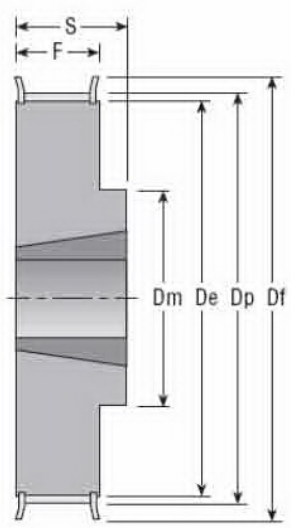


Style 2F

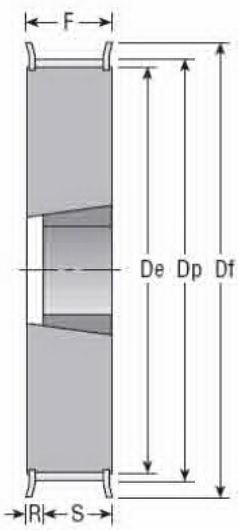


Style 3F

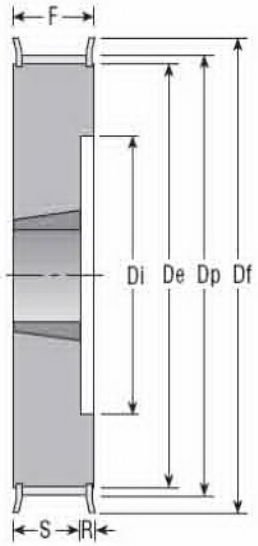


Style 5F

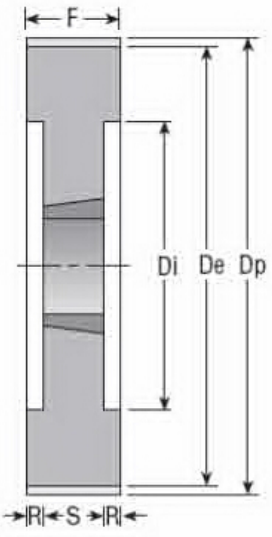


Style 6

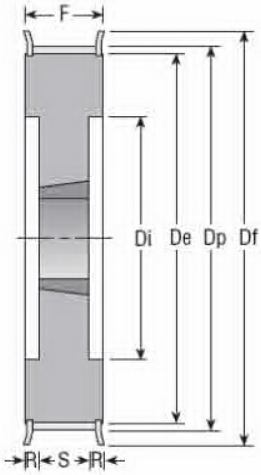


Style 6F

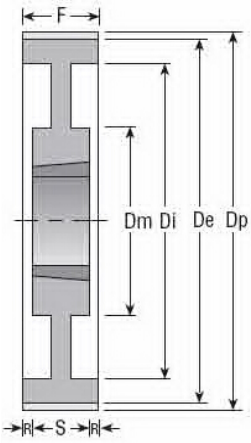


Style 7

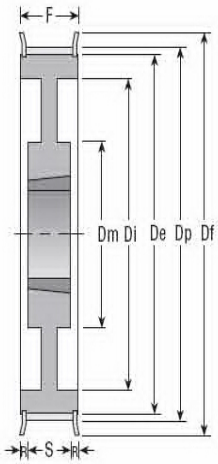


Style 7F

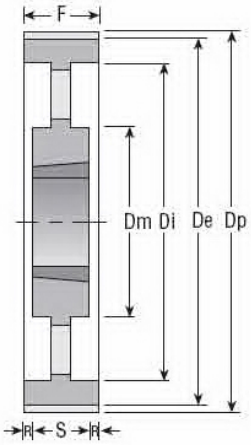


Style 8

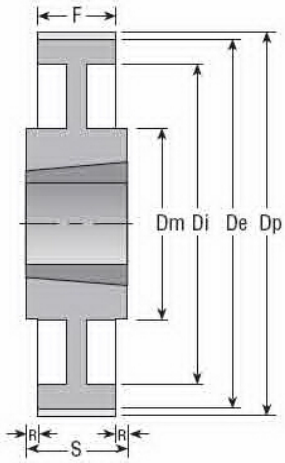


Style 9

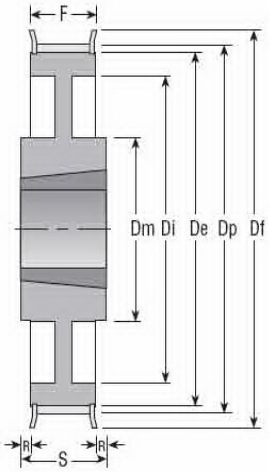

Style 9F

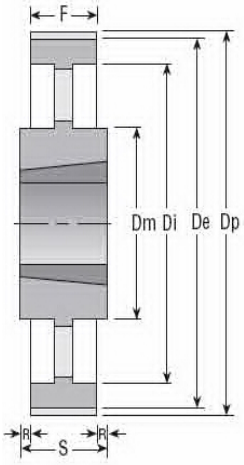

Style 10

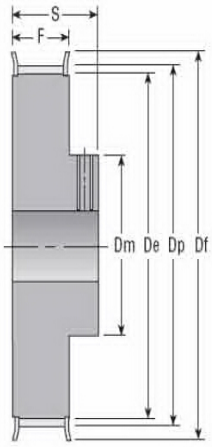

Style PB

Metric Timing Belt Pulleys -- 8M-12 (For Poly Chain® GT2 Belts)

Reference	Teeth	Belt Width	Mat'l	Style	Bush/ PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
8M-22S-12PB	22	12	ST	PB	12	28	56,02	54,42	62	43	-	20	30	-
8M-25S-12	25	12	CI	2F	1108	28	63,66	62,06	70	49	-	20	22	-
8M-28S-12	28	12	CI	2F	1108	28	71,30	69,70	79	59	-	20	22	
8M-30S-12	30	12	CI	2F	1210	32	76,39	74,79	86	66	-	20	25	-
8M-32S-12	32	12	CI	2F	1610	42	81,49	79,89	90	66	-	20	25	-
8M-34S-12	34	12	CI	2F	1610	42	86,58	84,98	95	70	-	20	25	-
8M-36S-12	36	12	CI	2F	1610	42	91,67	90,07	98	78	-	20	25	-
8M-38S-12	38	12	CI	2F	1610	42	96,77	95,17	106	80	-	20	25	-
8M-40S-12	40	12	CI	2F	1610	42	101,86	100,26	111	85	-	20	25	-
8M-45S-12	45	12	CI	2F	2012	50	114,59	112,99	119	92	-	20	32	-
8M-48S-12	48	12	CI	2F	2012	50	122,23	120,63	135	104	-	20	32	-
8M-50S-12	50	12	CI	2F	2012	50	127,32	125,72	135	104	-	20	32	-
8M-56S-12	56	12	CI	2F	2012	50	142,60	141,00	151	104	-	20	32	-
8M-60S-12	60	12	CI	2F	2012	50	152,79	151,19	159	111	-	20	32	-

Metric Timing Belt Pulleys -- 8M-21 (For Poly Chain® GT2 Belts)

Reference	Teeth	Belt Width	Mat'l	Style	Bush/ PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
8M-22S-21PB	22	21	ST	PB	12	28*	56,02	54,42	62	43	-	30	40	-
8M-25S-21	25	21	CI	3F	1108	28	63,66	62,06	70	-	-	30	22	8
8M-28S-21	28	21	ST	3F	1210	32	71,30	69,70	79	-	-	30	25	5
8M-30S-21	30	21	ST	3F	1210	32	76,39	74,79	86	-	-	30	25	5
8M-32S-21	32	21	ST	3F	1610	42	81,49	79,89	90	-	-	30	25	5
8M-34S-21	34	21	CI	3F	1610	42	86,58	84,98	95	-	-	30	25	5
8M-36S-21	36	21	CI	3F	1610	42	91,67	90,07	98	-	-	30	25	5
8M-38S-21	38	21	CI	3F	1610	42	96,77	95,17	106	-	-	30	25	5
8M-40S-21	40	21	CI	3F	1610	42	101,86	100,26	111	-	-	30	25	5
8M-45S-21	45	21	CI	2F	2012	50	114,59	112,99	119	92	-	30	32	-
8M-48S-21	48	21	CI	2F	2012	50	122,23	120,63	135	104	-	30	32	-
8M-50S-21	50	21	CI	2F	2012	50	127,32	125,72	135	104	-	30	32	-
8M-56S-21	56	21	CI	2F	2012	50	142,60	141,00	151	111	-	30	32	-
8M-60S-21	60	21	CI	2F	2517	60	152,79	151,19	159	124	-	30	45	-

Metric Timing Belt Pulleys -- 8M-36 (For Poly Chain® GT2 Belts)

Reference	Teeth	Belt Width	Mat'l	Style	Bush/ PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
8M-25S-36PB	25	36	ST	PB	12	32	63,66	62,06	70	49	-	45	55	-
8M-28S-36	28	36	ST	3F	1210	32	71,30	69,70	79	-	-	45	25	20
8M-30S-36	30	36	ST	3F	1610	42	76,39	74,79	86	-	-	45	25	20
8M-32S-36	32	36	ST	3F	1610	42	81,89	79,89	90	-	-	45	25	20
8M-34S-36	34	36	CI	3F	1610	42	86,58	84,98	95	-	-	45	25	20
8M-36S-36	36	36	CI	3F	1610	42	91,67	90,07	98	-	-	45	25	20
8M-38S-36	38	36	CI	3F	1610	42	96,77	95,17	106	-	-	45	25	20

Reference	Teeth	Belt Width	Mat'l	Style	Bush/ PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
8M-40S-36	40	36	ST	3F	2012	50	101,86	100,26	111	-	-	45	32	13
8M-45S-36	45	36	CI	3F	2012	50	114,59	112,99	119	-	-	45	32	13
8M-48S-36	48	36	CI	3F	2012	50	122,23	120,63	135	-	-	45	32	13
8M-50S-36	50	36	CI	3F	2012	50	127,32	125,72	135	-	-	45	32	13
8M-56S-36	56	36	CI	3F	2517	60	142,60	141,00	151	-	-	45	45	0
8M-60S-36	60	36	CI	3F	2517	60	152,79	151,19	159	-	-	45	45	0

Metric Timing Belt Pulleys -- 8M-62 (For Poly Chain® GT2 Belts)

Reference	Teeth	Belt Width	Mat'l	Style	Bush/ PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
8M-30S-62PB	30	62	ST	PB	20	42	76,39	74,79	86	65	-	72	84	-
8M-32S-62PB	32	62	ST	PB	20	50*	81,49	79,89	90	69	-	72	84	-
8M-34S-62PB	34	62	ST	PB	20	55*	86,58	84,98	95	74	-	72	84	-
8M-36S-62PB	36	62	ST	PB	20	60*	91,67	90,07	98	77	-	72	84	-
8M-38S-62PB	38	62	ST	PB	20	60	96,77	95,17	106	84	-	72	84	-
8M-40S-62	40	62	CI	3F	2012	50	101,86	100,26	111	-	-	72	32	40
8M-45S-62	45	62	CI	3F	2012	50	114,59	112,99	119	-	-	72	32	40
8M-48S-62	48	62	CI	3F	2517	60	122,23	120,63	135	-	-	72	45	27
8M-50S-62	50	62	CI	3F	2517	60	127,32	125,72	135	-	-	72	45	27
8M-56S-62	56	62	CI	6F	2517	60	142,60	141,00	151	-	111	72	45	13,5
8M-60S-62	60	62	CI	6F	2517	60	152,79	151,19	159	-	121	72	45	13,5

Metric Timing Belt Pulleys -- 14M-20 (For Poly Chain® GT2 Belts)

Reference	Teeth	Belt Width	Mat'l	Style	Bush/ PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
14M-28S-20	28	20	CI	3F	2012	50	124,78	121,98	141	-	-	33	32	1
14M-30S-20	30	20	CI	3F	2012	50	133,69	130,89	141	-	-	33	32	1
14M-32S-20	32	20	CI	3F	2012	50	142,60	139,80	155	-	-	33	32	1
14M-34S-20	34	20	CI	2F	2517	60	151,52	148,72	162	117	-	33	45	-
14M-36S-20	36	20	CI	2F	2517	60	160,43	157,53	168	117	-	33	45	-
14M-38S-20	38	20	CI	2F	2517	60	169,34	166,54	183	117	-	33	45	-
14M-40S-20	40	20	CI	2F	2517	60	178,25	175,45	197	117	-	33	45	-
14M-44S-20	44	20	CI	2F	3020	75	196,08	193,28	211	144	-	33	51	-
14M-48S-20	48	20	CI	2F	3020	75	213,90	211,11	226	144	-	33	51	-
14M-50S-20	50	20	CI	2F	3020	75	222,82	220,02	239	144	-	33	51	-
14M-56S-20	56	20	CI	9F	3020	75	249,55	246,76	267	144	207	33	51	9
14M-60S-20	60	20	CI	9	3020	75	267,38	264,58	-	159	224	33	51	9
14M-64S-20	64	20	CI	9	3020	75	285,21	282,41	-	159	242	33	51	9
14M-72S-20	72	20	CI	9	3020	75	320,86	318,06	-	159	278	33	51	9
14M-80S-20	80	20	CI	9	3020	75	356,51	353,71	-	159	314	33	51	9
14M-90S-20	90	20	CI	10	3020	75	401,07	398,27	-	159	360	33	51	9
14M-112S-20	112	20	CI	10	3020	75	499,11	496,31	-	159	456	33	51	9
14M-140S-20	140	20	CI	10	3020	75	623,89	621,09	-	159	581	33	51	9

Metric Timing Belt Pulleys -- 14M-37 (For Poly Chain® GT2 Belts)

Reference	Teeth	Belt Width	Mat'l	Style	Bush/ PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
14M-28S-37	28	37	CI	5F	2012	50	124,78	121,98	141	-	88	51	32	19
14M-30S-37	30	37	CI	6F	2517	60	133,69	130,89	141	-	98	51	45	3
14M-32S-37	32	37	CI	6F	2517	60	142,60	139,80	155	-	100	51	45	3
14M-34S-37	34	37	CI	6F	2517	60	151,52	148,72	162	-	109	51	45	3
14M-36S-37	36	37	CI	5F	2517	60	160,43	157,53	168	-	117	51	45	6
14M-38S-37	38	37	CI	5F	2517	60	169,34	166,54	183	-	126	51	45	6
14M-40S-37	40	37	CI	5F	2517	60	178,25	175,45	197	-	135	51	45	6
14M-44S-37	44	37	CI	3F	3020	75	196,08	193,28	211	-	-	51	51	-
14M-48S-37	48	37	CI	3F	3020	75	213,90	211,11	226	-	-	51	51	-
14M-50S-37	50	37	CI	3F	3020	75	222,82	220,02	239	-	-	51	51	-
14M-56S-37	56	37	CI	7F	3020	75	249,55	246,76	267	144	207	51	51	0
14M-60S-37	60	37	CI	7	3020	75	267,38	264,58	-	159	224	51	51	-
14M-64S-37	64	37	CI	7	3020	75	285,21	282,41	-	159	242	51	51	-
14M-72S-37	72	37	CI	7	3020	75	320,86	318,06	-	159	278	51	51	-
14M-80S-37	80	37	CI	7	3020	75	356,51	353,71	-	159	314	51	51	-
14M-90S-37	90	37	CI	8	3020	75	401,07	398,27	-	159	360	51	51	0
14M-112S-37	112	37	CI	8	3020	75	499,11	496,31	-	159	456	51	51	0
14M-140S-37	140	37	CI	10	3525	100	623,89	621,09	-	206	581	51	65	7
14M-168S-37	168	37	CI	10	3525	100	748,66	745,87	-	206	706	51	65	7
14M-192S-37	192	37	CI	10	4030	115	855,61	852,82	-	215	812	51	76	12,5

Metric Timing Belt Pulleys -- 14M-68 (For Poly Chain® GT2 Belts)

Reference	Teeth	Belt Width	Mat'l	Style	Bush/ PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
14M-34S-68PB	34	68	CI	PB	40	100	151,52	148,72	162	134	-	84	104	-
14M-36S-68PB	36	68	CI	PB	40	110*	160,43	157,53	168	134	-	84	104	-
14M-38S-68PB	38	68	CI	PB	40	115*	169,34	166,54	183	141	-	84	104	-
14M-40S-68PB	40	68	CI	PB	40	125*	178,25	175,45	197	156	-	84	104	-
14M-44S-68	44	68	CI	6F	3020	75	196,08	193,28	211	-	153	84	51	16,5
14M-48S-68	48	68	CI	5F	3020	75	213,90	211,11	226	-	171	84	51	33
14M-50S-68	50	68	CI	6F	3525	100	222,82	220,02	239	-	180	84	65	9,5
14M-56S-68	56	68	CI	6F	3525	100	249,55	246,76	267	-	207	84	65	9,5
14M-60S-68	60	68	CI	6	3525	100	267,38	264,58	-	-	224	84	65	9,5
14M-64S-68	64	68	CI	6	3525	100	285,21	282,41	-	-	242	84	65	9,5
14M-72S-68	72	68	CI	7	3525	100	320,86	318,06	-	178	278	84	65	9,5
14M-80S-68	80	68	CI	7	3525	100	356,51	353,71	-	178	314	84	65	9,5
14M-90S-68	90	68	CI	8	3525	100	401,07	398,27	-	178	360	84	65	9,5
14M-112S-68	112	68	CI	8	3525	100	499,11	496,31	-	178	456	84	65	9,5
14M-140S-68	140	68	CI	8	3525	100	623,89	621,09	-	206	581	84	65	9,5
14M-168S-68	168	68	CI	8	3525	100	748,66	745,87	-	206	706	84	65	9,5
14M-192S-68	192	68	CI	8	4030	115	855,61	852,82	-	215	812	84	76	4

Metric Timing Belt Pulleys -- 14M-90 (For Poly Chain® GT2 Belts)

Reference	Teeth	Belt Width	Mat'l	Style	Bush/ PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
14M-36S-90PB	36	90	CI	PB	50	110	160,43	157,53	168	131	-	106	136	-
14M-38S-90PB	38	90	CI	PB	50	115	169,34	166,54	183	147	-	106	136	-
14M-40S-90PB	40	90	CI	PB	50	125	178,25	175,45	197	156	-	106	136	-
14M-44S-90PB	44	90	CI	PB	50	140	196,08	193,28	211	169	-	106	136	-
14M-48S-90	48	90	CI	6F	3525	100	213,90	211,11	226	-	171	106	66	20
14M-50S-90	50	90	CI	6F	3525	100	222,82	220,02	239	-	180	106	66	20
14M-56S-90	56	90	CI	6F	3525	100	249,55	246,76	267	-	207	106	66	20
14M-60S-90	60	90	CI	6	3525	100	267,38	264,58	-	-	224	106	66	20
14M-64S-90	64	90	CI	6	3525	100	285,21	282,41	-	-	242	106	66	20
14M-72S-90	72	90	CI	7	3525	100	320,86	318,06	-	178	278	106	66	20
14M-80S-90	80	90	CI	7	4030	115	356,51	353,71	-	215	314	106	76	15
14M-90S-90	90	90	CI	7	4030	115	401,07	398,27	-	215	360	106	76	15
14M-112S-90	112	90	CI	8	4535	125	499,11	496,31	-	215	456	106	90	8
14M-140S-90	140	90	CI	8	4535	125	623,89	621,09	-	215	581	106	90	8
14M-168S-90	168	90	CI	8	5040	130*	748,66	745,87	-	267	708	106	102	2
14M-192S-90	192	90	CI	8	5040	130*	855,61	852,82	-	267	812	106	102	2

Metric Timing Belt Pulleys -- 14M-125 (For Poly Chain® GT2 Belts)

Reference	Teeth	Belt Width	Mat'l	Style	Bush/ PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
14M-38S-125PB	38	125	CI	PB	50	115	169,34	166,54	183	147	-	141	161	-
14M-40S-125PB	40	125	CI	PB	50	125	178,25	175,45	197	156	-	141	161	-
14M-44S-125PB	44	125	CI	PB	50	140	196,08	193,28	211	170	-	141	161	-
14M-48S-125PB	48	125	CI	PB	50	160	213,90	211,11	226	185	-	141	161	-
14M-50S-125	50	125	CI	6F	3525	100	222,82	220,02	239	-	180	141	65	38
14M-56S-125	56	125	CI	6F	3525	100	249,55	246,76	267	-	207	141	65	38
14M-60S-125	60	125	CI	6	4030	115	267,38	264,58	-	-	224	141	76	32,5
14M-64S-125	64	125	CI	6	4030	115	285,21	282,41	-	-	242	141	76	32,5
14M-72S-125	72	125	CI	7	4030	115	320,86	318,06	-	215	278	141	76	32,5
14M-80S-125	80	125	CI	7	4030	115	356,51	353,71	-	215	314	141	76	32,5
14M-90S-125	90	125	CI	7	4030	115	401,07	398,27	-	215	360	141	76	32,5
14M-112S-125	112	125	CI	8	4535	125	499,11	496,31	-	215	581	141	89	26
14M-140S-125	140	125	CI	8	4535	125	623,89	621,09	-	215	581	141	89	26
14M-168S-125	168	125	CI	8	5040	125	748,66	745,87	-	267	706	141	102	19,5
14M-192S-125	192	125	CI	8	5040	125	855,61	852,82	-	267	812	141	102	19,5